


VCC Range from 2.7 to 5.5 VDC

Disconnect JP3 to defeat onboard I2C pullup resistors

J2, J3, J4 are header pads for common cathode PTH RGB LEDs, such as COM-09264 or COM-00105.
JP4, JP5, JP6 can be used to disable onboard LEDs when external ones are added

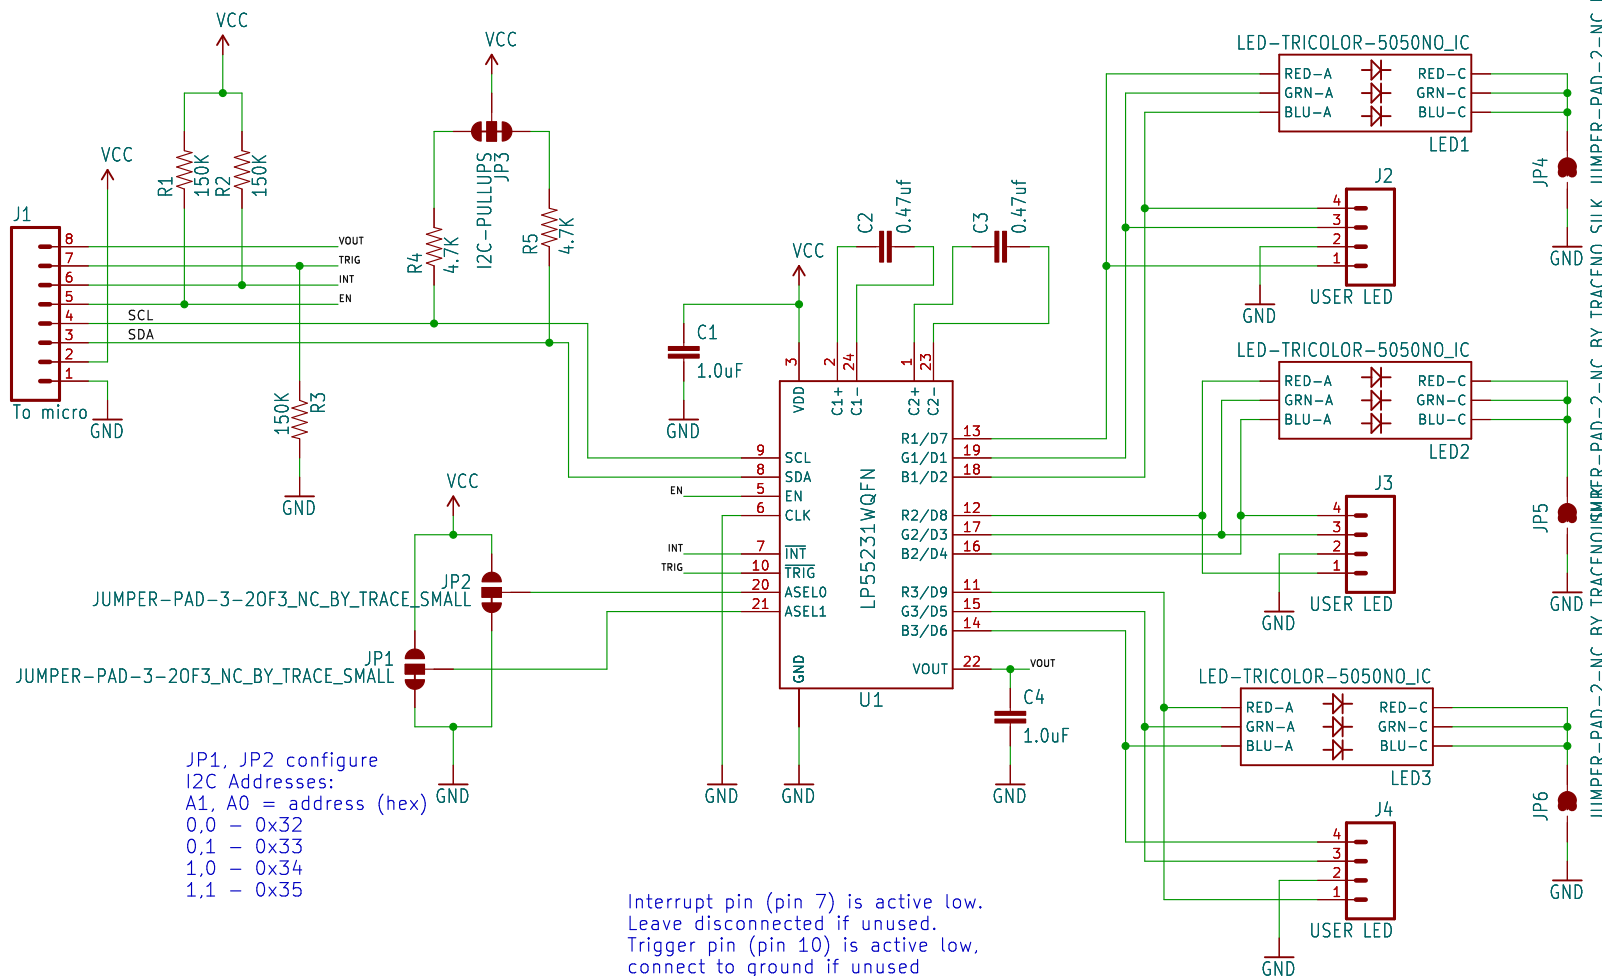

JUMPER-PAD-3-20F3_NC_BY_TRACE_SMALL

JUMPER-PAD-3-20F3_NC_BY_TRACE_SMALL

JP1, JP2 configure
I2C Addresses:
A1, A0 = address (hex)
0,0 - 0x32
0,1 - 0x33
1,0 - 0x34
1,1 - 0x35

Interrupt pin (pin 7) is active low.
Leave disconnected if unused.
Trigger pin (pin 10) is active low,
connect to ground if unused



Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/		
TITLE: \${PROJECTNAME}		REV: V10
Design by: Byron Jacquot		Sheet: /
Date: \${CURRENT_DATE}		Sheet: \${#}/\$##
Size: User	Date:	Rev:
KiCad E.D.A.	eeschema 7.0.6	Id: 1/1