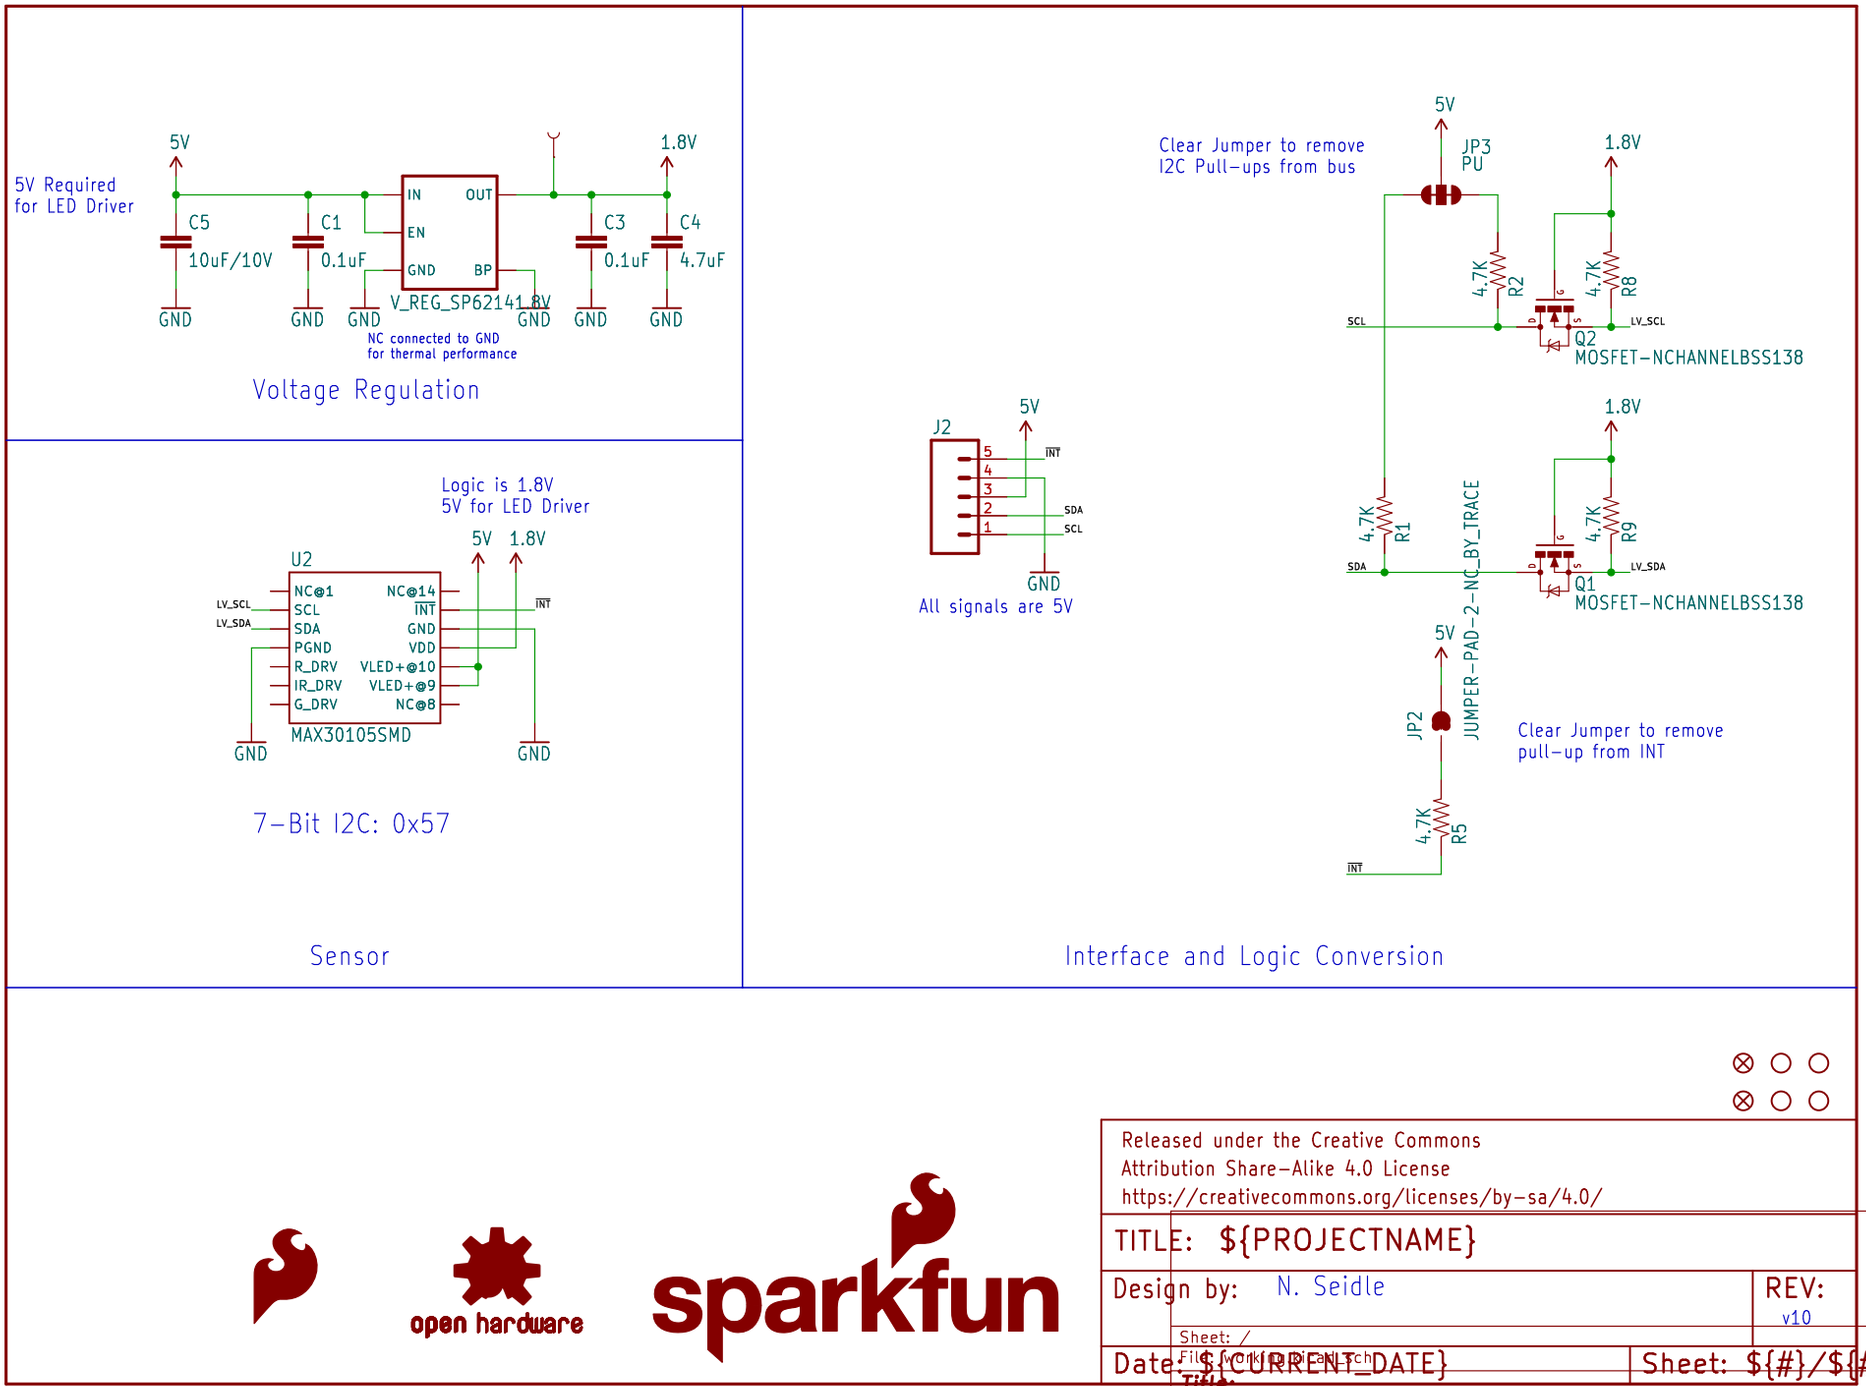
5V Required
for LED Driver
5V
C5
10uF/10V
C1
0.1uF
IN
OUT
EN
GND
BP
V_REG_SP62141_8V
C3
0.1uF
1.8V
C4
4.7uF
GND
NC connected to GND
for thermal performance
Voltage Regulation
Logic is 1.8V
5V for LED Driver
U2
NC@1
SCL
SDA
PGND
R_DRV
IR_DRV
G_DRV
NC@14
INT
GND
VDD
VLED+@10
VLED+@9
NC@8
LV_SCL
LV_SDA
MAX30105SMD
7-Bit I2C: 0x57
Sensor
J2
All signals are 5V
Clear Jumper to remove
I2C Pull-ups from bus
JP3
PU
4.7K
R2
R8
Q2
MOSFET-NCHANNELBSS138
SCL
SDA
LV_SCL
LV_SDA
R1
R9
Q1
JUMPER-PAD-2-NC_BY_TRACE
JP2
R5
Clear Jumper to remove
pull-up from INT
Interface and Logic Conversion
open hardware
sparkfun
Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/
TITLE: ${PROJECTNAME}
Design by: N. Seidle
REV:
v10
Sheet: /
File: working_plan.kicad_sch
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
Title:
Size: User
Date:
Rev:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6~ubuntu22.04.1
Id: 1/1