
DCDC Output MOS (Q5) Usage:
In apps with a DCDC, Q5 controls if the DCDC output connects to VBUS.
Make sure to prevent backflow both ways.

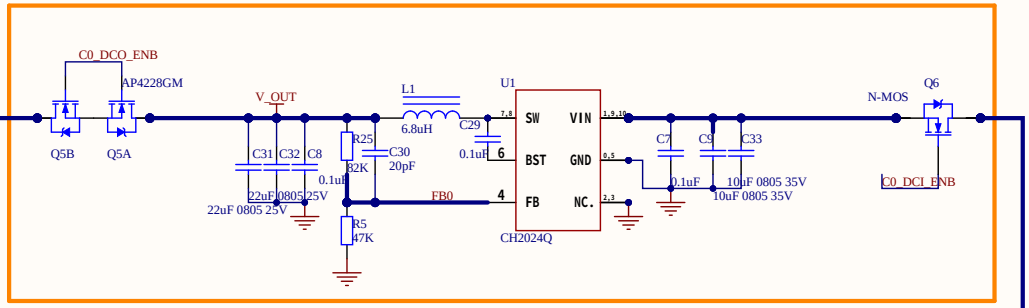


Explanation of the DCDC Input MOS (Q6) Usage:


The DCDC isn' t used in all routines. For routines that don' t use the DCDC, if you don' t disconnect it, it might cause functional issues.

In the routines, Q6 has been controlled according to its application. For new applications, you should properly configure whether the DCDC is connected to the circuit.


If your application needs the power input to always stay at high voltage/high power, then you need to use the DCDC to supply the output. If your application can work fine

Type-C Port0

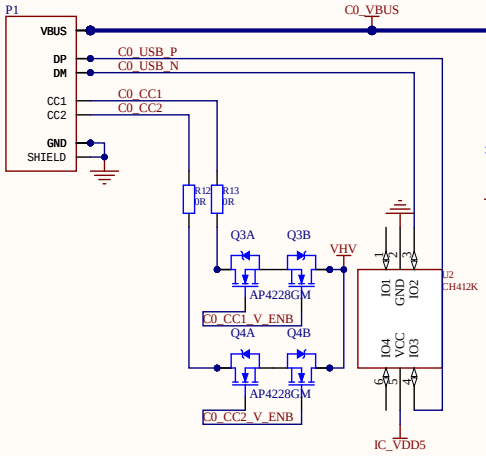





Power Type-C Port1





Key points for VCN power design:VCN power is used to supply power to the eMarker or active cables, with a protocol specification of 3.3-5V±20%.The PB8/PB10 levels are VDD5, VCN outputs about 4V, and it has overvoltage backflow protection.When VHV is at high voltage, the NMOS will bear the full voltage drop, so try to avoid this or pay attention to power consumption.

The DIP switch controls whether the corresponding CC has DeadBatt. Please configure it as needed according to your application. CCs without DeadBatt also won' t be able to enable Rd later.









MCU

