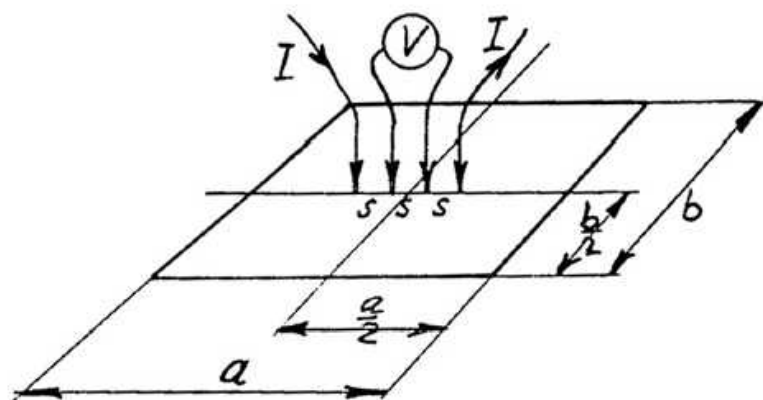


K) THIN, RECTANGULAR SLICE.K.1) Rectangular Slice.thickness  $t < \frac{b}{2}$ 

This configuration has been treated by Smits (e). The resistivity is given by;

$$\rho = G \frac{V}{I}, \quad G = \frac{\pi}{\ln 2} \cdot t \cdot R_1\left(\frac{b}{s}, \frac{a}{b}\right) \quad (25)$$

where

$\frac{\pi}{\ln 2} \cdot t = 4,5324 \cdot t$  is the geometric factor for an infinitely large slice of thickness  $t \ll s$ , and

$R_1\left(\frac{b}{s}, \frac{a}{b}\right)$  is the additional correction to apply because of the finite, rectangular shape.

$R_1$  is tabulated at page 54 and shown at page 55.  $\frac{\pi}{\ln 2} \cdot R_1$  is tabulated at page 56 and shown at page 57.