
Keycap Connector J1

FH34SRJ-12S-0.5SH(50)




J1

FH34SRJ-12S-0.5SH(50)

Mates with Waveshare 0.85in ScreenKey LCD B, SKU 34087

Ribbon Connector J2

FH34SRJ-14S-0.5SH(50)

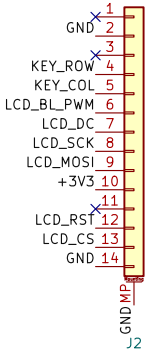


J2

FH34SRJ-14S-0.5SH(50)

Keyboard side

? Not measured
Ground (measured)
? Diode, source not traced
C6 row 0, through a main board diode
B1 column 14
A8, stock module BOOT
B13, stock module RESET
C11, stock UART3 RX
C10, stock UART3 TX
3.3 V (measured)
B2 column 15, not measured
C14, stock encoder B
C13, stock encoder A
Ground (measured)

Resistors

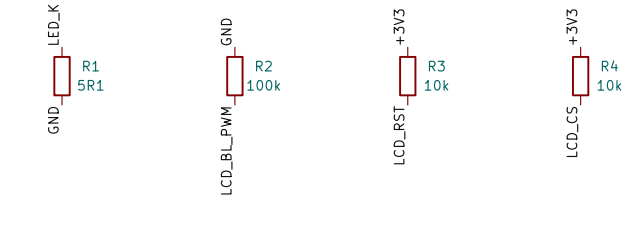

Current sense


Backlight off at boot

RST pull-up

CS pull-up

Key Switch SW1

Soldered MX switch




Key stays in the normal matrix at [0,14].

Rotated 180 degrees so J1 clears the post.

Backlight Driver U1


PAM2804AAB010



EN takes 500 Hz PWM from A8.

Output current is 0.1 V / R1, about 20 mA.

Capacitors and Inductor

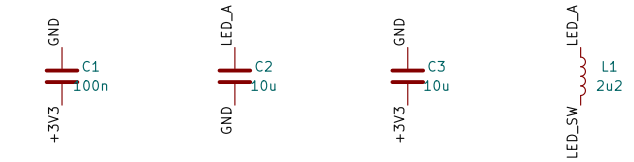

Panel decoupling

Driver output

Driver input

Driver inductor

Replaces the Zoom65 V3 one-key module with a 0.85in 128 x 128 ST7735 ScreenKey Keycap display on a soldered MX switch, wired to the keyboard over the 14-pin ribbon Key on row 0, column 14. Display driven over bit-banged SPI by custom QMK
Untested, not ready to order

Sheet: /
File: Zoom65v3-screenkey.kicad_sch

Title: Zoom65 V3 ScreenKey MX Module

Size: A4	Date: 2026-11-05	**Rev: v0.1**
KiCad E.D.A. 10.0.7		Id: 1/1