EE 315 Assignment 10

Transient Stability Assessment of a Nine-Bus System and Critical Clearing-Time Analysis

Course	EE 315 – Power Systems
Assignment	Project / Assignment 10
Name	Bhasuru Nikhil (Member 5)
Project Lead	Akarsh J
Roll Number	240002017
Group	04
Implementation	MATLAB simulation
Project Files	GitHub: PowerSystems-Project-10
Website	View project website

1 Group Members

Member	Roll Number	Name
Member 1	240002007	Akarsh J (Project Lead)
Member 2	240002073	Sreehari J.
Member 3	240002043	Naman V Shetty
Member 4	240002037	Mayur Soni
Member 5	240002017	Bhasuru Nikhil
Member 6	240002069	Ridhi Shakkar

2 Introduction

Transient stability concerns the ability of synchronous generators to remain in synchronism after a large disturbance. A fault changes the electrical power transferred through the network. The resulting imbalance between mechanical input and electrical output accelerates or decelerates the generator rotors. Clearing the fault changes the network again, and the subsequent rotor motion determines whether relative angles remain bounded.

This project studies a single-line-to-ground (SLG) fault in a three-generator, nine-bus system. The fault resistance is the last digit of roll number 240002017:

$$R_f = 7\ \Omega.$$

The initial operating point is calculated, the unbalanced fault is represented using sequence networks, and the swing equations are integrated for different fault durations. The objective is to search for a critical clearing time (CCT), defined for the chosen event and operating point as the limiting fault duration separating acceptable and unacceptable rotor-angle responses.

The study was implemented and simulated in MATLAB. All numerical results presented here were obtained from the MATLAB simulations.

3 System Modelling

3.1 Network Configuration

The network is adapted from MATPOWER case9. It contains three generators, three load buses and nine branches. The topology, branch reactances, line charging and power schedules are retained; branch resistances are neglected in accordance with the classical stability assumptions. The assigned fault resistance remains present.

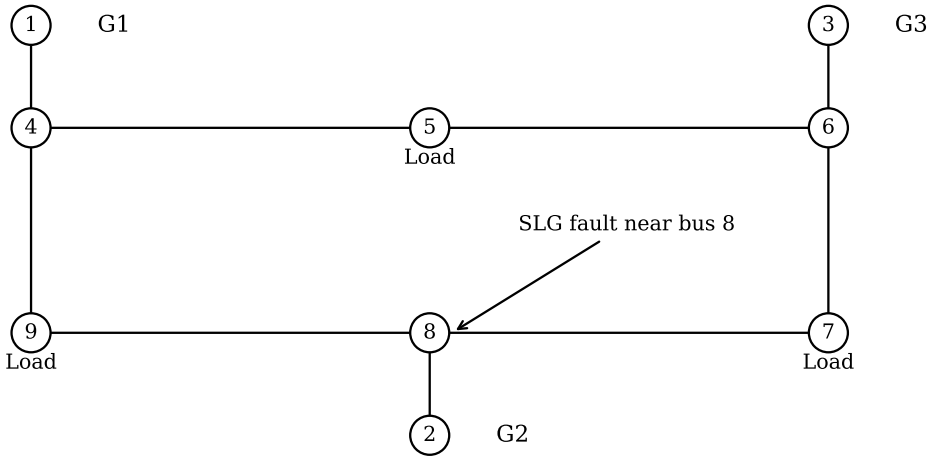


Figure 1: Nine-bus network and the selected fault location. Bus numbers are shown in circles.

3.2 System and Generator Parameters

Parameter	Value
System base	100 MVA
Transmission voltage base	345 kV, line-to-line
Frequency	50 Hz
Generator terminal voltage	1.0 pu
Loads at buses 5, 7 and 9	$90 + j30$, $100 + j35$, $125 + j50$ MVA
Scheduled generation G2 / G3	163 MW / 85 MW
Loading factor	1.0

Parameter	G1	G2	G3
H on 100-MVA base (s)	23.64	6.40	3.01
X'_d (pu)	0.0608	0.1198	0.1813
Damping coefficient	0	0	0
Initial P_m (pu)	0.670	1.630	0.850

The inertia and transient-reactance values are adopted study inputs. Mechanical input and internal-voltage magnitudes are held constant. Loads are represented by constant admittances during the disturbance. Governor, excitation-control and electromagnetic-transient dynamics are not included.

3.3 Branch and Sequence Data

Branch	R_1 (pu)	X_1 (pu)	Total B_1 (pu)
1–4	0	.0576	0
4–5	0	.0920	.158
5–6	0	.1700	.358
3–6	0	.0586	0
6–7	0	.1008	.209
7–8	0	.0720	.149
8–2	0	.0625	0
8–9	0	.1610	.306
9–4	0	.0850	.176

The adopted line sequence relationships are $Z_2 = Z_1$, $Z_0 = 3Z_1$ and $B_0 = B_1/3$. Generator negative-sequence reactance is taken as $X_2 = X'_d$. Step-up transformers have a generator-side delta winding and a grounded-wye transmission winding. Equivalent loads have equal positive- and negative-sequence impedances, with their zero-sequence paths open. These supplemental data specify the grounding and return paths needed for an SLG calculation.

3.4 Fault Application and Clearing

A phase-A-to-ground fault is applied on line 7–8, at 1% of its length from bus 8, at $t_f = 0.100$ s. An auxiliary algebraic node represents this point; it is not an additional physical bus in the original network. For a fault duration τ, the clearing instant is $t_c = 0.100 + \tau$. Clearing opens line 7–8 at both ends, without automatic reclosure.

4 Theoretical Analysis

4.1 Per-Unit Conversion

Using the three-phase MVA base and line-to-line voltage base,

$$Z_{\text{base}} = \frac{V_{\text{base}}^2}{S_{\text{base}}} = \frac{345^2}{100} = 1190.25\ \Omega, \qquad R_{f,\text{pu}} = \frac{7}{1190.25} = 0.00588112.$$

4.2 Initial Operating Point and Load Representation

A load-flow solution determines the bus voltages and generator currents. Bus 1 is the slack bus, buses 2 and 3 are voltage-controlled generation buses, and the remaining buses have specified net injections. The internal generator voltage and load admittance are

$$E'_i = V_i + jX'_{di}I_i, \qquad Y_{L,k} = \frac{P_{L,k} - jQ_{L,k}}{|V_k|^2}.$$

The mechanical power is initialized from pre-fault electrical power, so that each rotor starts at equilibrium. Since transmission resistances are zero, the scheduled active loads total 315 MW and the initial generation is $67 + 163 + 85 = 315$ MW.

4.3 SLG Fault and Network Reduction

For a phase-A-to-ground fault, the boundary conditions are $I_b = I_c = 0$ and $V_a = R_f I_a$. Symmetrical components give

$$I_0 = I_1 = I_2, \qquad I_a = 3I_1.$$

The sequence networks are connected in series. In a Thevenin representation,

$$I_1 = \frac{V_{\text{th}}}{Z_{1,ff} + Z_{2,ff} + Z_{0,ff} + 3R_{f,\text{pu}}}.$$

For the time-domain classical model, the positive-sequence network is retained explicitly. Eliminating the passive negative- and zero-sequence networks gives a shunt at the fault point:

$$Y_{f,\text{eq}} = \frac{1}{Z_{2,ff} + Z_{0,ff} + 3R_{f,\text{pu}}}.$$

The positive-sequence driving-point impedance is already represented by that network and is not added again in this shunt. Eliminating algebraic bus voltages produces the internal-generator admittance matrix

$$Y_{\text{red}} = Y_{gg} - Y_{gb} Y_{bb}^{-1} Y_{bg}.$$

Separate reduced matrices are used before the fault, during the fault and after the line is opened. Generator electrical power is evaluated as

$$P_{e,i} = \text{Re}\left\{ E'_i \left(\sum_j Y_{\text{red},ij} E'_j \right)^* \right\}.$$

4.4 Swing Equations

For rotor angles in electrical radians, Lecture 30 gives

$$\frac{H_i}{\pi f} \frac{d^2\delta_i}{dt^2} = P_{m,i} - P_{e,i}, \qquad H_{i,\text{sys}} = H_{i,\text{mach}} \frac{S_{i,\text{mach}}}{S_{\text{base}}}.$$

Introducing the per-unit speed deviation $\Delta\omega_i$ yields

$$\dot{\delta}_i = 2\pi f \Delta\omega_i, \qquad \dot{\Delta\omega}_i = \frac{P_{m,i} - P_{e,i}}{2H_i}.$$

No damping term is included. The three angle states and three speed states are solved together, with electrical power recalculated at each integration stage.

4.5 Clearing-Time Assessment

The slide expression $t_{cr} = \sqrt{2H(\delta_{cr} - \delta_0)/(\pi f P_m)}$ applies when $P_e = 0$ during the fault. That condition is not assumed for this SLG event; the coupled swing equations are integrated instead. Loss of synchronism is detected numerically when the unwrapped pairwise angle spread reaches 360°. Passing a finite observation window is a numerical test, not a proof of stability for all future time.

5 Simulation and Computational Procedure

5.1 Integration and Duration Search

For the state equation $\dot{x} = F(x)$, fourth-order Runge–Kutta uses

$$k_1 = F(x_n), \qquad k_2 = F(x_n + hk_1/2),$$
$$k_3 = F(x_n + hk_2/2), \qquad k_4 = F(x_n + hk_3),$$
$$x_{n+1} = x_n + \frac{h}{6}(k_1 + 2k_2 + 2k_3 + k_4).$$

The time step is shortened when necessary to land exactly on fault application or clearing. This prevents one integration step from mixing two network configurations.

1. Solve the pre-fault load flow and calculate internal generator voltages and load admittances.
2. Form pre-fault, fault-on and post-fault reduced networks.
3. Initialize the rotor angles from internal voltages and set speed deviations to zero.
4. Simulate a selected fault duration and observe the response for 20 s after clearing.
5. Record the largest pairwise angle spread and whether the 360° threshold is reached.
6. Repeat for 61 durations from 0 to 3 s in 0.05 s increments.
7. If a passing/failing interval is found, refine it by bisection until its width is at most 0.001 s. If none is found, report that no finite CCT was identified in the sampled range.

5.2 MATLAB Implementation

The standalone function is `Assignment10_Bhasuru_G4_M5.m`. To generate MATLAB outputs, run:

```
results = Assignment10_Bhasuru_G4_M5;
```

The function requires no additional toolbox. It saves a duration-scan CSV, two trajectory CSVs, a summary, a MAT file and a rotor-angle/speed figure in `results_matlab/`. The settings are a 0.002 s integration step, 20 s post-clear observation and 0.001 s boundary tolerance. The default loading factor is 1.0 and $R_f = 7\ \Omega$.

5.3 Output Quantities

Plots use the inertia-weighted centre-of-inertia angle:

$$\delta_{\mathrm{COI}} = \frac{\sum_i H_i \delta_i}{\sum_i H_i}, \qquad \delta_{i,\mathrm{rel}} = \delta_i - \delta_{\mathrm{COI}}.$$

The frequency deviation is $\Delta f_i = f\Delta\omega_i$. The detection quantity is $\max_i \delta_i - \min_i \delta_i$, calculated from unwrapped angles. Removing the common angle motion improves readability without changing the pairwise differences.

6 Simulation Results

6.1 Initial Bus Voltages

Bus	Voltage magnitude (pu)	Angle (degrees)
1	1.000000	0.0000
2	1.000000	10.0228
3	1.000000	5.1352
4	0.993430	-2.2263
5	0.991343	-3.7544
6	1.001664	2.2848
7	0.987696	0.9102
8	0.992276	4.1300
9	0.973556	-4.1631

Table 1: Calculated pre-fault operating point, referenced to bus 1.

The smallest initial voltage is 0.973556 pu at bus 9. The load-flow mismatch is 9.51×10^{-11} pu. The initial accelerating power is zero to numerical precision because P_m is initialized from the same pre-fault network.

6.2 Response for a 0.100 s Fault

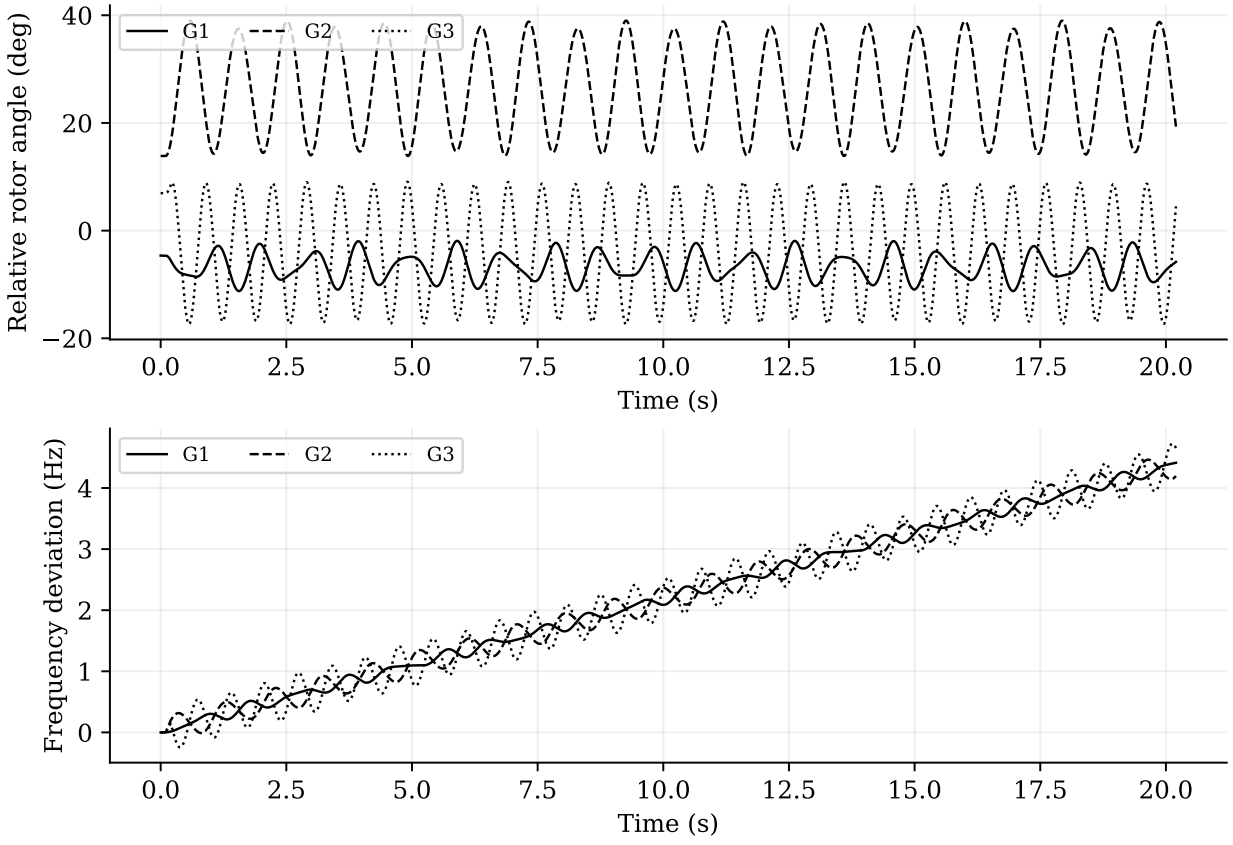


Figure 2: Relative rotor angles and frequency deviations for clearing at $t = 0.200$ s.

The largest pairwise rotor-angle separation is 56.423°. The generators oscillate relative to one another without crossing the chosen loss-of-synchronism threshold during the observation window. The oscillations persist because damping is omitted.

6.3 Response for a 3.000 s Fault

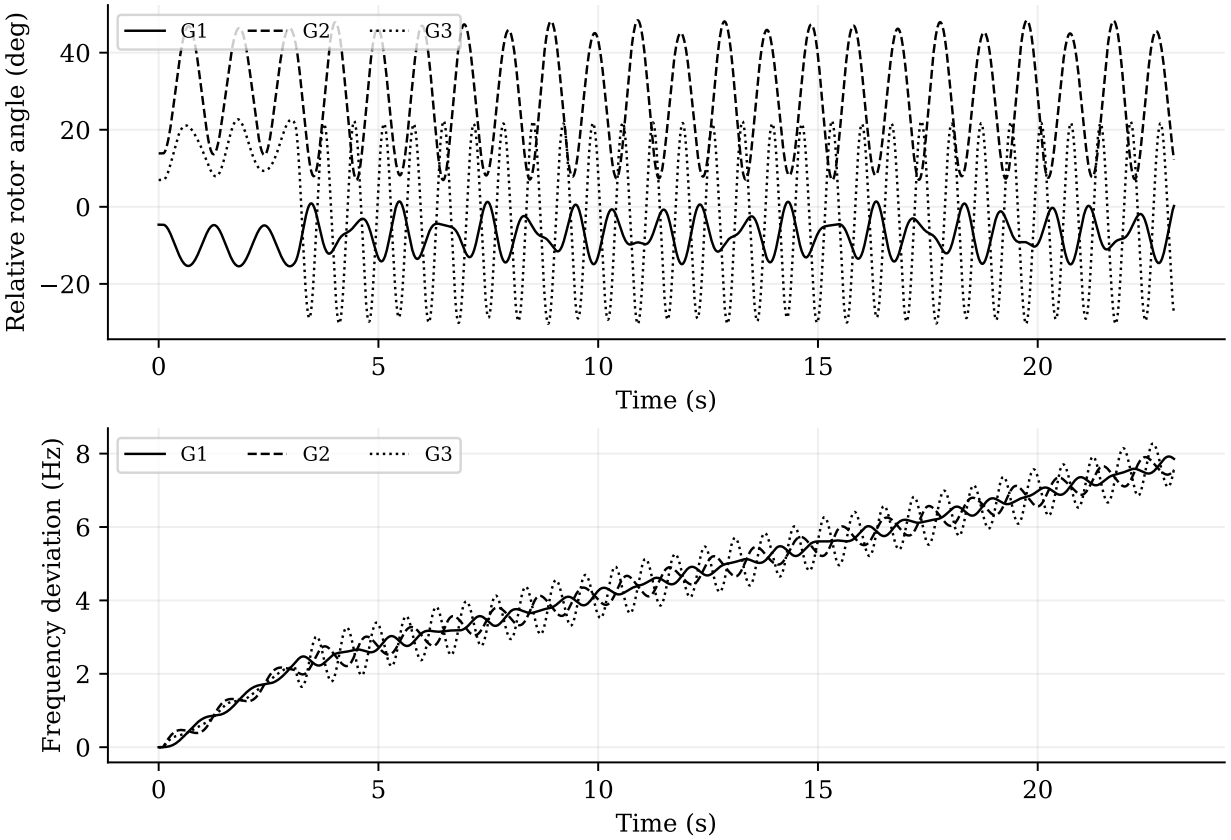


Figure 3: Relative rotor angles and frequency deviations for clearing at $t = 3.100$ s.

For the 3 s fault, the peak pairwise separation is 78.833°. The relative rotor angles remain within the threshold, although common frequency drift is visible. Thus the angle test alone does not demonstrate acceptable frequency regulation.

6.4 Duration-Scan Results

Fault duration (s)	Peak pairwise angle (degrees)	Angle test
0.00	54.264	Pass
0.10	56.423	Pass
0.50	79.548	Pass
1.00	62.239	Pass
1.50	71.631	Pass
2.00	67.073	Pass
2.50	62.239	Pass
3.00	78.833	Pass

Table 2: Selected trials from the 61-case duration scan. Each trial includes 20 s after clearing.

All 61 sampled durations pass. No passing/failing bracket is therefore available for bisection, and no finite CCT is identified within the sampled 0–3 s range.

6.5 Variation with Fault Duration

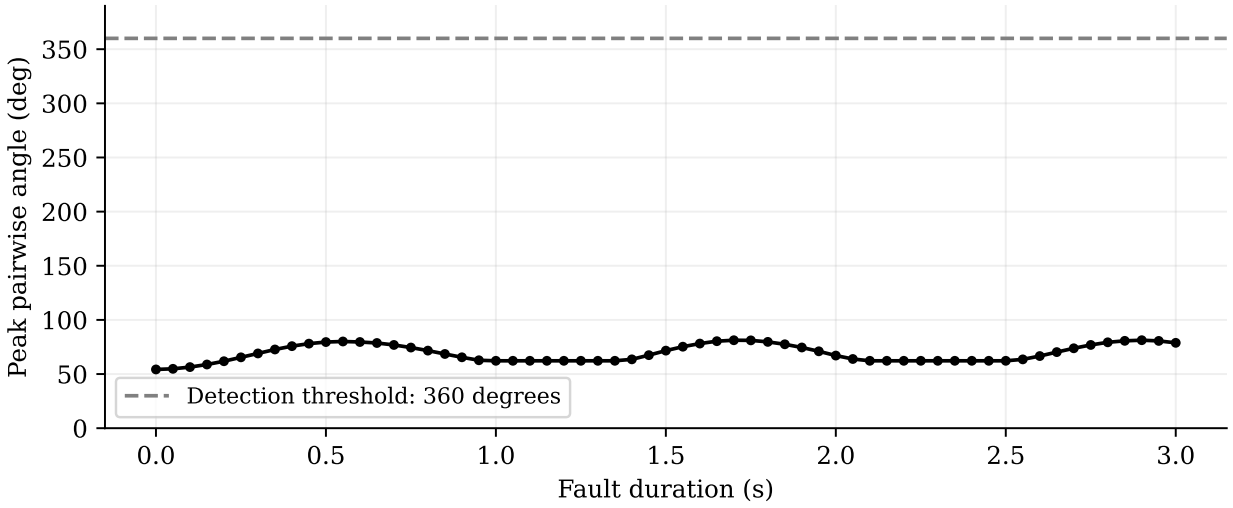


Figure 4: Peak pairwise rotor-angle separation over each complete trajectory.

The response is not monotonic in fault duration: clearing occurs at different phases of the fault-on rotor oscillation, so the post-clear peak can rise or fall. The maximum observed value across the scan is 81.260 degrees at a fault duration of 2.90 s. All sampled peaks remain below the numerical threshold.

6.6 Numerical Verification

Check	Result
RK4 step reduced from 2 ms to 1 ms	No boundary in the full 0–3 s scan
Post-clear observation extended to 40 s	No boundary in the full 0–3 s scan
Independent Newton load flow	Maximum mismatch 6.11×10^{-13} pu
Independent DOP853 integration	0, 0.1, 1 and 3 s trials pass
SLG condition $V_a = R_f I_a$	Residual 1.21×10^{-16} pu

All reference calculations, integration and verification checks were carried out in MATLAB; the provided MATLAB function reproduces these results.

7 Discussion and Conclusion

For the specified normal-loading network, grounding arrangement and line 7–8 SLG event with $R_f = 7\ \Omega$, all 61 tested durations pass the relative-angle criterion. The study therefore reports **no finite CCT identified within the sampled 0–3 s interval**. It does not infer infinite CCT or guarantee the outcome at every unsampled duration.

The classical model isolates rotor-angle behaviour. Fixed mechanical input and omitted governors permit common speed drift; this limits the physical accuracy of long-horizon trajectories evaluated with fixed-frequency network parameters. Voltage/reactive limits, excitation control, electromagnetic transients and negative-sequence heating or torque ripple are outside the model. The numerical result is consequently specific to these declared assumptions.

References. EE 315 Lecture 27: SLG sequence networks; Lecture 30, pp. 3–7 and 17: swing equations, inertia conversion, classical assumptions and clearing time; Lecture 31: equal-area examples. Network data: MATPOWER case9.