YEAR 9 PHYSICS, AQA GCSE, UNIT 2, PART 3

ENERGY STORES AND TRANSFERS

PART 3 OF 3


LESSONS 7–9: POWER, WASTED ENERGY, EFFICIENCY

3 LESSONS

3 PRACTICALS

2 NEW EQUATIONS

ANSWER EDITION FOR TEACHERS AND SELF-MARKING

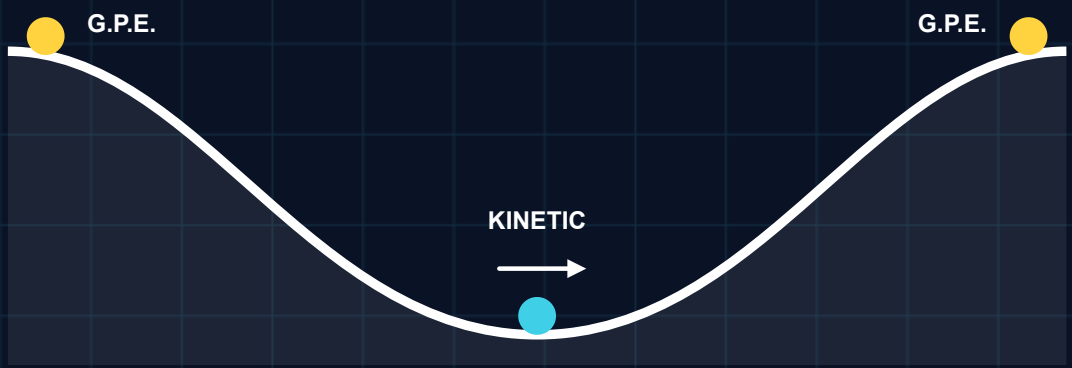

NAME _____

CLASS _____

TEACHER _____

TARGET GRADE _____

START HERE

HOW THIS BOOKLET WORKS

Energy is never made and never destroyed: it only moves from one store to another. This booklet shows you how to follow it, and how to calculate it. Keep the booklet: it is your classwork book *and* your revision guide.

DO NOW
Quick questions from earlier lessons. Remembering again is what makes it stick.

LEARN IT
Explanations and diagrams. Fill in the slide examples with your teacher, then try "Your turn" alone.

TRY IT
Practice that builds up: first with support, then on your own. Each lesson ends with the slides' Quick check.

PRACTICAL
Record your measurements and work out results from them.

EXAM CORNER
AQA-style questions with a tip on how the marks are given.

REVISE IT
Summary, cover-and-answer questions and an "I can" check to colour in.

! **Two kinds of question to know.** When a sentence has a gap, the choices are printed straight after it, like this: Energy is measured in ___joules___ **(joules / newtons / watts)**. When you see a box of choices, **draw a ring around** the correct one, as AQA exam papers ask. The unit of energy is **the watt** | **(the joule)** | **the newton** .

THE ROUTE THROUGH THIS PART

#	LESSON	WEEK
07	**Power** Power as a rate, watts, $P = \frac{E}{t}$, how powerful are you?	4
08	**Wasted energy** Dissipation, lubrication, thermal conductivity, insulation, design an Eco House	4
09	**Efficiency** Efficiency from energy or power, decimals and percentages, Sankey diagrams	5

This booklet is Part 3 of 3: Lessons 7–9. The **equation toolkit** on the last page has every equation in the unit, with formula triangles to help you rearrange.

Energy: Stores and Transfers, Year 9 workbook Part 3 (ANSWERS), © 2026 PanPhy Labs. All rights reserved.

Lesson

07 POWER

AQA Physics 4.1.1.4; Combined Science 6.1.1.4

BIG QUESTION **Two students carry the same bag up the same stairs. One runs and one walks. Who transferred more energy? Who was more powerful?**

BY THE END YOU CAN

- say what power means
- state that 1 watt is 1 joule per second
- calculate power with $P = \frac{E}{t}$, and find E or t
- convert kW to W, kJ to J and minutes to seconds

power | watt (W) | kilowatt (kW) | rate

YOU WILL NEED

Practical: stopwatch, tape measure or metre rule, a flight of stairs.

REMEMBER

DO NOW

From earlier lessons. No notes!

1

A 50 kg student climbs 3.0 m of stairs. Calculate the energy transferred to their G.P.E. store.

$E_p = 50 \times 9.8 \times 3.0$

$E_p = 1470$ J

2

Convert 2.0 minutes to seconds.

120 s

3

State the principle of conservation of energy.

Energy can be transferred usefully, stored or dissipated, but cannot be created or destroyed.

EXPLAIN

HOW FAST IS ENERGY TRANSFERRED?


Power is how fast energy is transferred: the energy transferred **each second**. Two motors can lift the same load through the same height, so they transfer the same energy. The motor that does it faster is more powerful.

$$P = \frac{E}{t}$$

power = energy transferred ÷ time

P in watts (W), E in joules (J), t in seconds (s)

Rearranged: $E = Pt$ and $t = \frac{E}{P}$



! **1 watt (W) = 1 joule per second.** 1 kilowatt (kW) = 1000 W. A 60 W lamp transfers 60 J every second.

	ENERGY TRANSFERRED	TIME	POWER
Motor A	29.4 J	2.0 s	29.4 ÷ 2.0 = 14.7 W
Motor B	29.4 J	6.0 s	29.4 ÷ 6.0 = 4.9 W

WITH YOUR TEACHER SLIDE 55

A motor transfers 600 J in 4.0 s. Calculate its power.

EQUATION $P = \frac{E}{t}$

SUBSTITUTE $P = \frac{600}{4.0}$

ANSWER **P = 150 W**

YOUR TURN

A lamp transfers 900 J in 15 s. Calculate its power.

EQUATION $P = \frac{E}{t}$

SUBSTITUTE $P = \frac{900}{15}$

ANSWER **P = 60 W**

WITH YOUR TEACHER SLIDE 56

A 2.0 kW kettle is switched on for 2.0 minutes. Calculate the energy transferred.

CONVERT **P = 2000 W, t = 120 s**

EQUATION $P = \frac{E}{t}$

REARRANGE $E = Pt$

SUBSTITUTE $E = 2000 \times 120$

ANSWER **E = 240 000 J**

YOUR TURN

A 1.5 kW heater is switched on for 3.0 minutes. Calculate the energy transferred.

CONVERT **P = 1500 W, t = 180 s**

EQUATION $P = \frac{E}{t}$

REARRANGE $E = Pt$

SUBSTITUTE $E = 1500 \times 180$

ANSWER **E = 270 000 J**

PRACTISE

TRY IT

1 Draw a ring around the correct answer in each box.

Power is measured in | **joules** | **watts** | **newtons** |

A more powerful motor transfers energy | **faster** | **slower** |

1 W is the same as | **1 J per second** | **1 J per minute** | **1 N per metre** |

2 SUPPORTED A 30 W fan runs for 5.0 minutes. Calculate the energy transferred. *Convert the time first!*

CONVERT	**t = 5.0 × 60 = 300 s**
EQUATION	$E = Pt$
SUBSTITUTE	$E = 30 \times 300$
ANSWER	**9000 J** unit:

3 Complete the table. Show your working underneath.

Appliance	Energy / J	Time / s	Power / W
Fan	1200	30	40
Kettle	120 000	60	2000
Lamp	5000	50	100

4 CHALLENGE A 3.0 kW heater transfers 540 kJ. How many minutes was it on for?

$t = \frac{E}{P} = \frac{540\,000}{3000} = 180$ **s = 3.0 minutes**


INVESTIGATE

PRACTICAL: HOW POWERFUL ARE YOU?

Everyone uses a mass of 50 kg, so nobody is weighed.

STAY SAFE

- Walk briskly. Do not run. Hold the handrail.
- One person on the stairs at a time.
- Use dry, clear stairs.

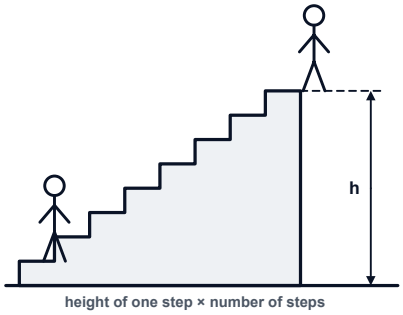

1. Measure the height of one step. Count the steps. Height h = step height × number of steps.
2. Your partner times you walking briskly up the stairs.
3. Calculate the energy transferred: $E = m\,g\,h$, with $m = 50$ kg.
4. Calculate your power: $P = \frac{E}{t}$.

Height of one step / m	**0.17**
Number of steps	**18**
Height h / m	**3.06**
Mass / kg	50
Time / s	**5.0**

5 Calculate the energy transferred to your G.P.E. store.

EQUATION	$E_p = m\,g\,h$
SUBSTITUTE	$E_p = 50 \times 9.8 \times 3.06$
ANSWER	**1500 J (sample)** unit:

6 Calculate your power.

EQUATION	$P = \frac{E}{t}$
SUBSTITUTE	$P = \frac{1500}{5.0}$
ANSWER	**300 W (sample)** unit:

7 Is your real power output (higher) / lower than your answer? Explain.

Higher: you also transferred energy to your kinetic store and to the thermal store of your body and the air, not only to your G.P.E. store.

CHECKPOINT

QUICK CHECK

Slide 59. Answer each question, then check it as your teacher reveals the answer.

1

What is power?

The rate of energy transfer: joules per second.

2

600 J is transferred in 10 s. Calculate the power.

60 W

3

A 40 W fan runs for 5.0 minutes. Calculate the energy transferred.

$40 \times 300 = 12\,000$ **J**

4

A 1500 W motor transfers 45 000 J. How long does it take?

$\frac{45\,000}{1500} = 30$ **s**

5

Write 3.0 kW in watts.

3000 W

6

A more powerful motor does the same job. What is different?

The same energy is transferred, in less time.

AQA-STYLE

EXAM CORNER

Write in full sentences. Show every step of a calculation.

> **Get the marks:** Two steps: find the energy first, then the power.

8 A lift motor raises a 600 kg lift through 15 m in 20 s. Gravitational field strength = 9.8 N/kg. **[2 marks]**

(a) Calculate the energy transferred to the lift's gravitational potential store.

EQUATION	$E_p = m\,g\,h$
SUBSTITUTE	$E_p = 600 \times 9.8 \times 15$ **(1)**
ANSWER	**88 200 J (1)** unit:

9 (b) Calculate the useful power output of the motor. **[2 marks]**

EQUATION	$P = \frac{E}{t}$
SUBSTITUTE	$P = \frac{88\,200}{20}$ **(1)**
ANSWER	**4410 W (1)** unit:

10 Motor A lifts a load in 5 s. Motor B lifts the same load through the same height in 10 s. Complete the sentence. **[2 marks]**

Motor A transfers **the same** **(more / less / the same)** energy as motor B, and has **a greater** **(a greater / a smaller / the same)** power.

REVIEW LATER

REVISE IT

Use this box after the lesson and before tests.

SUMMARY

- Power is the rate of energy transfer: the energy transferred each second.
- $P = \frac{E}{t}$; $E = Pt$; $t = \frac{E}{P}$.
- 1 W = 1 J/s; 1 kW = 1000 W.
- Time in seconds: minutes × 60.

COVER THE PAGE AND ANSWER

1 What is power?

2 What is 1 watt?

3 A lamp transfers 800 J in 20 s. What is its power?

4 Write the equation to find energy from power and time.

I CAN...

- define power as the rate of energy transfer
- calculate $P = \frac{E}{t}$ and find E or t
- convert kW, kJ and minutes
- measure my own power

Lesson

08 WASTED ENERGY

AQA Physics 4.1.2.1; Combined Science 6.1.2.1

BIG QUESTION **A hot chocolate always goes cold. Where does the energy go, and how can you slow it down?**

BY THE END YOU CAN

- explain what “dissipated” means and where the energy ends up
- explain how lubrication reduces unwanted energy transfers
- explain how thermal conductivity and wall thickness affect how fast a house cools
- suggest and explain ways to insulate a home

dissipated **friction** **lubrication** **conduction** **thermal conductivity** **thermal insulator**

SEEING HEAT

A thermal camera shows warm things as bright colours. Point one at a house in winter and the windows, the roof and the gaps round the door glow: that is where energy is escaping into the cold air outside.

REMEMBER

DO NOW

From earlier lessons. No notes!

1

A fan transfers 600 J in 20 s. Calculate its power.

P = 600 ÷ 20 = 30 W

2

Dissipated energy usually ends up in the **thermal** **(thermal / chemical / nuclear)** store of the surroundings.

thermal

3

A pendulum swings lower each time. Why?

Some energy is dissipated by air resistance and friction.

EXPLAIN

REDUCING UNWANTED ENERGY TRANSFERS

In every real energy transfer, some energy goes to stores where it is not useful, usually the **thermal store of the surroundings**. This energy is **dissipated** (spread out). People often call it “wasted” energy. It is not destroyed, but we cannot use it again.

UNWANTED TRANSFER	HOW TO REDUCE IT	WHY IT WORKS
Friction between moving parts	Lubricate with oil or grease	The surfaces slide past each other more easily, so less energy goes to the thermal store
Air resistance on a vehicle	A streamlined shape	The air pushes back less, so less energy goes to the thermal store of the air
Conduction through walls and roofs	Thermal insulation	Materials with a low thermal conductivity slow the transfer

CONDUCTION AND THERMAL CONDUCTIVITY

Energy is transferred through a solid by **conduction**, from the hotter side to the colder side. A material with a **higher thermal conductivity** transfers energy **faster**. Metals have a high thermal conductivity. Air, wool and plastic foam have a low thermal conductivity, so they are good **thermal insulators**. Many insulators work because they trap air.


> ! A house cools **more slowly** if its walls are **thicker** and have a **lower thermal conductivity**.

INVESTIGATE

PRACTICAL: COOLING CUPS

TRIPLE ONLY

Your teacher pours the hot water.

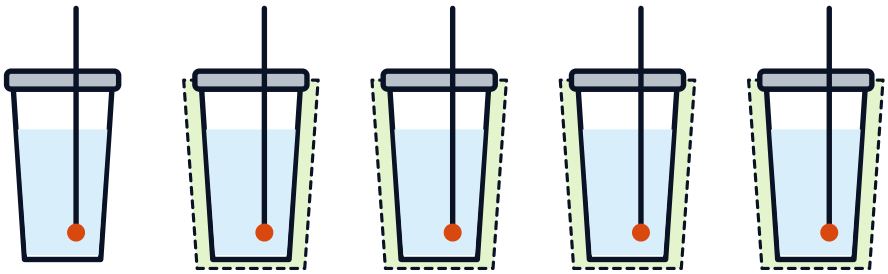

Question: which material is the best thermal insulator?

Independent variable	**the insulating material**
Dependent variable	**the temperature drop in 10 minutes**
Control variables (two)	**volume of water, starting temperature, type of cup, thickness of wrapping, lid**

STAY SAFE

- The water is about 60 °C: hot enough to scald. Do not move the cups.
- Stand the cups in a tray. Report any spill straight away.

5 Record your results.

Material	Start / °C	After 10 min / °C	Drop / °C
none	60	47	13
newspaper	60	52	8
bubble wrap	60	54	6
cotton wool	60	55	5
felt	60	53	7

6 The material is a categoric variable, so draw a **line graph** / **bar chart** of the temperature drop. Draw it here.

Bar chart: one bar per material, temperature drop / °C on the y-axis.

7 Complete the conclusion.

The best insulator is the material whose cup had the **smallest** **(biggest / smallest)** temperature drop.

In my results, the best insulator was **cotton wool (sample)** **(none / newspaper / bubble wrap / cotton wool / felt)**.

Good insulators trap air, which has a **low** **(high / low)** thermal conductivity.

PRACTISE

TRY IT

1 Draw a line from each unwanted energy transfer to the best way to reduce it.

Friction in a bike chain	oil on the chain
Air resistance on a lorry	a streamlined shape
Conduction through a loft	thick loft insulation
Draughts under a door	a draught excluder

2 Draw a ring around the correct answer in each box.

Copper has a high thermal conductivity, so copper is a good

thermal insulator / **thermal conductor**


Making a wall twice as thick makes the house cool **faster** / **more slowly**

3 Explain what insulation really does.

Lily: Insulation keeps the cold out.

Insulation slows down the transfer of energy from the warm inside of the house to the colder outside.

4 DESIGN **Design an Eco House.** For each numbered place on the house, name a feature that reduces energy transfer out of the house, and explain why it works. Where they fit, use the words *thermal conductivity* or *thickness*. For gaps, explain how the feature stops warm air escaping.

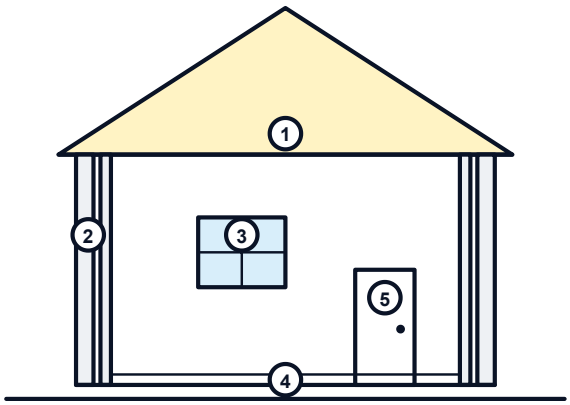

PLACE	FEATURE	WHY IT WORKS
1 Roof	**thick loft insulation**	**a thick layer of trapped air with a low thermal conductivity**
2 Walls	**cavity wall insulation**	**foam fills the gap; it has a low thermal conductivity**
3 Window	**double glazing**	**trapped air or gas between the panes has a low thermal conductivity**
4 Floor	**carpet or floor insulation**	**low thermal conductivity slows conduction into the ground**
5 Door	**draught excluder / insulated door**	**stops warm air escaping through gaps**

CHECKPOINT

QUICK CHECK

Slide 67. Answer each question, then check it as your teacher reveals the answer.

1
Where does dissipated energy end up?

In the thermal store of the surroundings.

2
How does oil help a bike chain?

It reduces friction, so less energy is dissipated.

3
Copper or glass: which conducts energy faster?

Copper: it has a higher thermal conductivity.

4
A wall is made thicker. Does the building cool faster or slower?

Slower.

5
Why do many insulators work well?

They trap air, which is a poor conductor.

6
Cooling cups: which cup had the best insulator?
TRIPLE ONLY

The one with the smallest temperature drop.

AQA-STYLE

EXAM CORNER

Write in full sentences. Show every step of a calculation.

Get the marks: Say what the lubricant does to friction, and then what that does to the energy.

8 Explain how oiling a bicycle chain reduces the energy wasted when you cycle. **[2 marks]**

Oil reduces friction between the moving parts (1), so less energy is transferred to the thermal store of the chain and surroundings (1).

9 Two houses have walls of the same thickness. The bricks of house A have a higher thermal conductivity than the bricks of house B. Which house cools faster? Explain. **[2 marks]**

House A (1): a higher thermal conductivity means energy is transferred through the walls by conduction faster (1).

REVIEW LATER

REVISE IT

Use this box after the lesson and before tests.

SUMMARY

- Dissipated (“wasted”) energy usually goes to the thermal store of the surroundings.
- Lubrication reduces friction, so less energy is dissipated.
- Higher thermal conductivity = faster energy transfer by conduction.
- Thicker walls with lower thermal conductivity make a house cool more slowly.
- Many insulators trap air.

COVER THE PAGE AND ANSWER

1 Where does dissipated energy usually end up?

2 How does lubrication reduce wasted energy?

3 What does a high thermal conductivity mean?

4 Give two ways to make a house cool more slowly.

I CAN…

- explain what dissipated means
- explain how lubrication reduces wasted energy
- explain the effect of thermal conductivity and wall thickness
- design and justify ways to insulate a home

Lesson

09 EFFICIENCY

AQA Physics 4.1.2.2; Combined Science 6.1.2.2

BIG QUESTION **An old filament lamp and an LED give out the same light. Why does the LED cost much less to run?**

BY THE END YOU CAN

- calculate efficiency as a decimal and as a percentage
- explain why efficiency can never be more than 100%
- find the useful output or the total input from the efficiency
- draw and read Sankey diagrams
- describe ways to increase efficiency

efficiency **useful output** **wasted output** **total input** **Sankey diagram**

LAMPS

A filament lamp transfers only about 1 joule in every 10 by light. The rest heats the room. An LED transfers several times more of its energy by light, so it needs much less energy for the same brightness.

REMEMBER

DO NOW

From earlier lessons. No notes!

1

A 2000 W heater is on for 30 s. Calculate the energy transferred.

E = P t = 2000 × 30 = 60 000 J

2

Where does most wasted energy end up?

The thermal store of the surroundings.

3

Give one way to reduce friction in a machine.

Lubricate it with oil or grease.

EXPLAIN

HOW MUCH IS USEFUL?

Efficiency tells you what fraction of the energy put into a device is transferred usefully. The rest is wasted, usually dissipated to the thermal store of the surroundings.


$$\text{efficiency} = \frac{\text{useful output energy transfer}}{\text{total input energy transfer}}$$

Energy in joules (J). Efficiency has no unit.

Answer as a decimal (for example 0.80), or multiply by 100 for a percentage (80%).

Rearranged: useful output = efficiency × total input, and

$$\text{total input} = \frac{\text{useful output}}{\text{efficiency}}$$



$$\text{efficiency} = \frac{\text{useful power output}}{\text{total power input}}$$

The same idea, using power in watts (W).

Use whichever pair the question gives you: energies or powers.

! Efficiency is **never more than 1** (100%). If your answer is bigger than 1, you have divided the wrong way round. To use a percentage in a calculation, change it to a decimal first: 25% = 0.25.

WITH YOUR TEACHER SLIDE 69

A motor is supplied with 500 J and transfers 400 J to the kinetic store of its load. Calculate its efficiency.

EQUATION	$\text{efficiency} = \frac{\text{useful}}{\text{total}}$
SUBSTITUTE	$\text{efficiency} = \frac{400}{500}$
ANSWER	0.80, or 80%

YOUR TURN

A fan is supplied with 300 J and transfers 210 J to the kinetic store of the air. Calculate its efficiency.

EQUATION	$\text{efficiency} = \frac{\text{useful}}{\text{total}}$
SUBSTITUTE	$\text{efficiency} = \frac{210}{300}$
ANSWER	0.70, or 70%

WITH YOUR TEACHER SLIDE 70

A 60 W lamp has an efficiency of 25%. Calculate its useful power output.

CONVERT	efficiency = 25% = 0.25
REARRANGE	useful = efficiency × total
SUBSTITUTE	useful = 0.25 × 60
ANSWER	15 W


YOUR TURN

A 500 W motor has an efficiency of 40%. Calculate its useful power output.

CONVERT	efficiency = 40% = 0.40
REARRANGE	useful = efficiency × total
SUBSTITUTE	useful = 0.40 × 500
ANSWER	200 W

SANKEY DIAGRAMS

1. The **width** of each arrow shows the amount of energy.
2. Useful energy goes **straight on**. Wasted energy **bends away**, usually downwards.
3. Input = useful + wasted. Here: 100 J = 20 J + 80 J.
4. Efficiency = 20 ÷ 100 = 0.20 (20%).

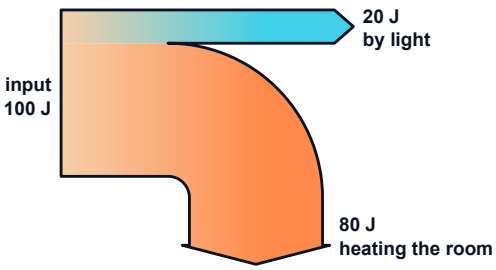

A lamp: 100 J in, 20 J by light.

INCREASING EFFICIENCY

Reduce the wasted energy: **lubricate** moving parts (less friction), **streamline** vehicles (less air resistance), **insulate** hot things (less energy transferred by heating), and choose devices that waste less, such as LEDs instead of filament lamps.

PRACTISE


TRY IT

1 Draw a ring around the correct answer in each box.

An efficiency of 1.4 is **possible** / **impossible**

Efficiency has the unit **joules** / **watts** / **no unit**

2 This is the Sankey diagram for an electric motor. Calculate its efficiency.

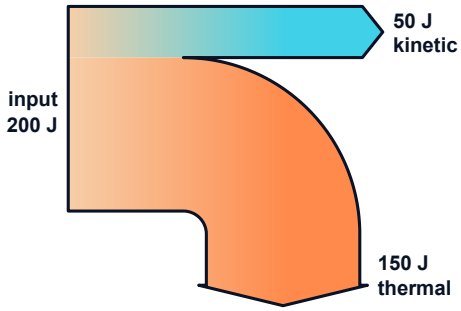

EQUATION	$\text{efficiency} = \frac{\text{useful}}{\text{total}}$
SUBSTITUTE	$\text{efficiency} = \frac{50}{200}$
ANSWER	**0.25 (25%)** unit:

3 A kettle is supplied with 2000 J. It transfers 1800 J to the thermal store of the water, and 200 J heats the kettle and the room. Draw its Sankey diagram. Let 1 square = 100 J.

Input arrow 20 squares wide; useful arrow 18 squares wide straight on (water); wasted arrow 2 squares wide bending down (kettle and room).

4 Complete the table. Show your working underneath.

Device	Total input	Useful output	Efficiency
TV	200 J	60 J	0.30 (30%)
Electric motor	1000 J	750 J	0.75
Solar panel	200 W	30 W	0.15

5 Complete the sentences. The choices are after each gap.

Oiling the gears of a machine **increases** (increases / decreases) its efficiency, because less energy is transferred by **friction** (friction / light).


An LED is **more** (more / less) efficient than a filament lamp, because **less** (more / less) energy is wasted heating the room.

INVESTIGATE

PRACTICAL: HOW EFFICIENT IS A BOUNCE?

Filming the bounce against the ruler makes it much easier to read.

1. Measure the mass in kg. Drop the ball from 1.00 m.
2. Measure the height of the first bounce.
3. Repeat three times and find the mean bounce height.
4. Repeat with a different ball.

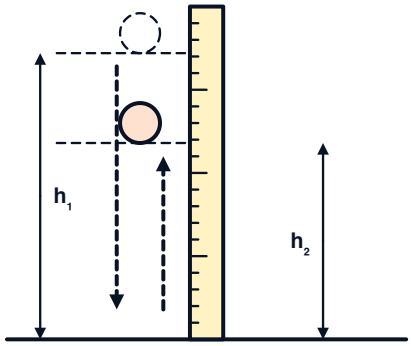

Measure both heights from the bottom of the ball. Use $E_p = m\,g\,h$ with $g = 9.8$ N/kg for each energy; then $\text{efficiency} = \dfrac{E_{p2}}{E_{p1}}$. Round only at the end.

6 Record your measurements.

Ball	Mass / kg	Drop / m	Bounce 1 / m	Bounce 2 / m	Bounce 3 / m	Mean / m
A	0.10	1.00	0.66	0.64	0.65	0.65
B	0.10	1.00	0.80	0.78	0.82	0.80

7 Calculate the two energies, then divide useful output by input.

Ball	Input E_{p1} / J	Useful E_{p2} / J	Efficiency
A	$0.10 \times 9.8 \times 1.00 = 0.98$	$0.10 \times 9.8 \times 0.65 = 0.637$	0.65 (65%)
B	$0.10 \times 9.8 \times 1.00 = 0.98$	$0.10 \times 9.8 \times 0.80 = 0.784$	0.80 (80%)

8 Where did the rest of the energy go?

To the thermal store of the ball and the floor, and some was transferred by sound (ending in the thermal store of the surroundings).

CHECKPOINT

QUICK CHECK

Slide 75. Answer each question, then check it as your teacher reveals the answer.

1

A device transfers 300 J usefully from 1200 J. Calculate its efficiency.

0.25 (25%)

2

Can an efficiency be 1.4? Explain.

No: that is more than 100%, so more energy would come out than goes in.

3

A 400 W motor is 75% efficient. Calculate its useful power.

$0.75 \times 400 = 300$ **W**

4

A device is 0.20 efficient and gives 12 J usefully. Calculate the total input.

$\frac{12}{0.20} = 60$ **J**

5

What is the unit of efficiency?

It has no unit.

6

On a Sankey diagram, which arrow shows the wasted energy?

The one that bends away.

AQA-STYLE

EXAM CORNER

Write in full sentences. Show every step of a calculation.

Get the marks: Check: is your efficiency less than 1 (100%)?

9 A 1200 W hair dryer has a useful power output of 1080 W. Calculate its efficiency as a percentage. **[3 marks]**

EQUATION	$\text{efficiency} = \frac{\text{useful power output}}{\text{total power input}}$
SUBSTITUTE	$\frac{1080}{1200} = 0.90$ (1)(1)
ANSWER	**90% (1)** unit:

10 Explain why an LED is more efficient than a filament lamp. **[2 marks]**

An LED wastes less energy heating the surroundings (1), so a bigger fraction of the input energy is transferred usefully by light (1).

REVIEW LATER

REVISE IT

Use this box after the lesson and before tests.

SUMMARY

- $\text{efficiency} = \dfrac{\text{useful output}}{\text{total input}}$, using energy or power.
- As a decimal (at most 1) or a percentage (at most 100%). No unit.
- useful = efficiency × total; total = useful ÷ efficiency.
- Sankey diagrams: arrow width shows energy; wasted energy bends away.
- Higher: lubricate, streamline, insulate to increase efficiency.

COVER THE PAGE AND ANSWER

1 Write the equation for efficiency using energy.

2 A device transfers 30 J usefully from 120 J. What is its efficiency?

3 Why can efficiency never be more than 100%?

4 On a Sankey diagram, what does the width of an arrow show?

I CAN…

- calculate efficiency as a decimal and a percentage
- find the useful output or the total input
- draw and read a Sankey diagram
- describe ways to increase efficiency

REFERENCE

KEY WORDS

Learn the meaning and the spelling. In exams, precise words earn marks: say “transferred to the thermal store of the surroundings”, never “lost”.

Power L7: The rate of energy transfer: energy transferred per second

Watt (W) L7: The unit of power: 1 W = 1 J/s

Lubrication L8: Oil or grease between moving parts, to reduce friction

Thermal conductivity L8: How fast a material transfers energy by conduction; higher means faster

Thermal insulator L8: A material with a low thermal conductivity

Efficiency L9: Useful output ÷ total input; a decimal up to 1 or a percentage up to 100%

Sankey diagram L9: A diagram in which the width of each arrow shows the amount of energy

FINISH

PROGRESS TRACKER

Colour one circle for each statement: **red** = not yet, **amber** = getting there, **green** = I can do this without help. Revisit your reds first.

I CAN…	R / A / G
07: Power	
define power as the rate of energy transfer	
calculate $P = \frac{E}{t}$ and find E or t	
convert kW, kJ and minutes	
measure my own power	
08: Wasted energy	
explain what dissipated means	
explain how lubrication reduces wasted energy	
explain the effect of thermal conductivity and wall thickness	
design and justify ways to insulate a home	
09: Efficiency	
calculate efficiency as a decimal and a percentage	
find the useful output or the total input	
draw and read a Sankey diagram	
describe ways to increase efficiency	

CHECK YOURSELF

QUICK ANSWERS

Answers to the “Do now” and “Cover the page” questions, so you can check yourself when revising. Answers to the longer questions are in your teacher's answer edition.

LESSON 7: POWER

DO NOW

1. $E_p = 50 \times 9.8 \times 3.0$
   $E_p = 1470$ J
2. 120 s
3. Energy can be transferred usefully, stored or dissipated, but cannot be created or destroyed.

COVER THE PAGE

1. The rate of energy transfer (energy transferred per second).
2. 1 joule per second.
3. 40 W
4. $E = Pt$

LESSON 8: WASTED ENERGY

DO NOW

1. P = 600 ÷ 20 = 30 W
2. thermal
3. Some energy is dissipated by air resistance and friction.

COVER THE PAGE

1. In the thermal store of the surroundings.
2. It reduces friction, so less energy is transferred to the thermal store.
3. The material transfers energy by conduction quickly.
4. Thicker walls; materials with a lower thermal conductivity (insulation).

LESSON 9: EFFICIENCY

DO NOW

1. E = P t = 2000 × 30 = 60 000 J
2. The thermal store of the surroundings.
3. Lubricate it with oil or grease.

COVER THE PAGE

1. efficiency = useful output energy transfer ÷ total input energy transfer
2. 0.25 (25%)
3. Energy cannot be created: the useful output can never be more than the input.
4. The amount of energy.

REFERENCE

EQUATION TOOLKIT

Every equation in the unit. AQA prints all of them on the equation sheet in the exam, but you still need to know what each symbol means, its unit, and how to use it. Use $g = 9.8\ \text{N/kg}$.

1. Cover the quantity you want to find.
2. What is left side by side? **Multiply**.
3. One above the other? **Divide** the top by the bottom.

Example: to find h from $E_p = m\,g\,h$, cover h. E_p is above m and g, so $h = \dfrac{E_p}{m\,g}$. Kinetic and elastic potential energy have no triangle: in this unit you only use them to calculate the energy.

$E_k = \frac{1}{2}\,m\,v^2$

Lesson 2

kinetic energy = 0.5 × mass × (speed)²

J, kg, m/s

Use it to calculate the energy. Only the speed is squared.


$s = v\,t$

Lesson 2

distance travelled = speed × time

m, m/s, s

$v = \dfrac{s}{t}$ and $t = \dfrac{s}{v}$




$E_p = m\,g\,h$

Lesson 3

gravitational potential energy = mass × gravitational field strength × height

J, kg, N/kg, m

$h = \dfrac{E_p}{m\,g}$ and $m = \dfrac{E_p}{g\,h}$




$F = k\,e$

Lesson 4

force = spring constant × extension

N, N/m, m

$k = \dfrac{F}{e}$ and $e = \dfrac{F}{k}$



$E_e = \frac{1}{2}\,k\,e^2$

Lesson 5

elastic potential energy = 0.5 × spring constant × (extension)²

J, N/m, m

Use it to calculate the energy. Only the extension is squared.


$P = \dfrac{E}{t}$

Lesson 7

power = energy transferred ÷ time

W, J, s

$E = P\,t$ and $t = \dfrac{E}{P}$




$\text{eff.} = \dfrac{\text{useful output}}{\text{total input}}$

Lesson 9

efficiency = useful output ÷ total input, using energy (J) or power (W)

no unit: a decimal up to 1, or × 100 for a percentage

useful = eff. × total; $\text{total} = \dfrac{\text{useful}}{\text{eff.}}$



1

Write what you know. Convert first: g → kg, cm → m, kJ → J, min → s, % → decimal.

2

Write the equation in symbols.

3

Rearrange if you need to, then substitute the numbers.

4

Give the answer with a unit. Ask: is it sensible?