


Half-duplex TTL: 1G126 drives DATA from UART2_TX (OE=DXL_DIR high), 1G125 reads DATA into UART2_RX (/OE=DXL_DIR low). R310 pulls DXL_DIR low at boot so the board listens. One bus, two EH sockets, no RS485.






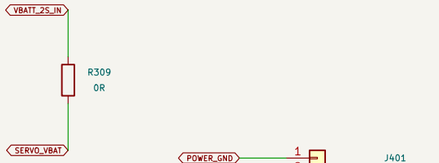

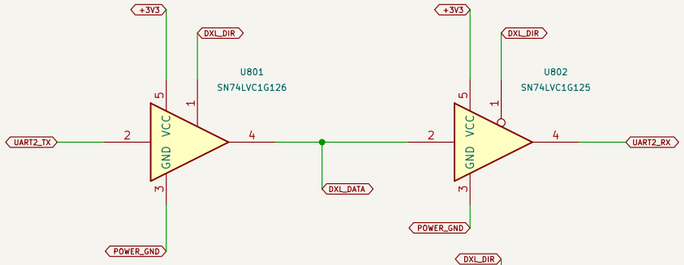





EH pin order: 1=GND, 2=VBAT, 3=DATA. R309 (0R) is the battery-to-servo branch. UART2 is the boot console until disabled in software.





C329/C330: local100nF bypasses from VCC toGND at U801/U802; existing bus polarity and OE logic unchanged.

duck-robot

Sheet: /
File: servo_ttl.kicad_sch

Title: Half-duplex TTL servo bus — two 3P outlets

Size: A3	Date: 2026-10-28	**Rev: A schematic draft**
KiCad E.D.A. 10.0.7		Id: 1/1