

e-closure(0)= {0,1,2,3,13} = A

move(A,digit)={3,14} e-closure(3,14)= {2,3,13,14} = B move (A,minus)= {1} e-closure(1) = {1,2,3,13} = C

move(A,point)= $\{4\}$ e-closure(4)= $\{4\}$ = D

move(B, digit) = {3,14} e-closure(3,14) = {2,3,13,14} = B move(B, point) = {4,15} e-closure(4,15) = {4,15,16} = E

move(C, digit) = {3,14} e-closure(3,14)= {2,3,13,14} = B move(C, point) = {4} e-closure(4)={4} = D

move(D, digit) = $\{4,5\}$ e-closure(4,5)= $\{4,5,6,8,16\}$ = F

move(E, digit) = {4,5} e-closure(4,5)= {4,5,6,8,16} = F


move(F, digit) = {4,5} e-closure(4,5)= {4,5,6,8,16} = F move(F, E) = {7} e-closure(7)= {10,11} = G move(F, e) = {9} e-closure(9)= {10,11} = G

move(G, digit) = {12} e-closure(12)= {11,16}=H move(G, minus) = {11} e-closure(11)= {11}=I


move(H, digit) = {12} e-closure(12)= {11,16} = H

move(I, digit) = {12} e-closure(12)= {11,16} = H

state		minus	digit	point	E	е
0	Α	С	В	D	NULL	NULL
1	В	NULL	В	E	NULL	NULL
2	С	NULL	В	D	NULL	NULL
3	D	NULL	F	NULL	NULL	NULL
4	E	NULL	F	NULL	NULL	NULL
5	F	NULL	F	NULL	G	G
6	G	I	Н	NULL	NULL	NULL
7	Н	NULL	Н	NULL	NULL	NULL
8	I	NULL	Н	NULL	NULL	NULL

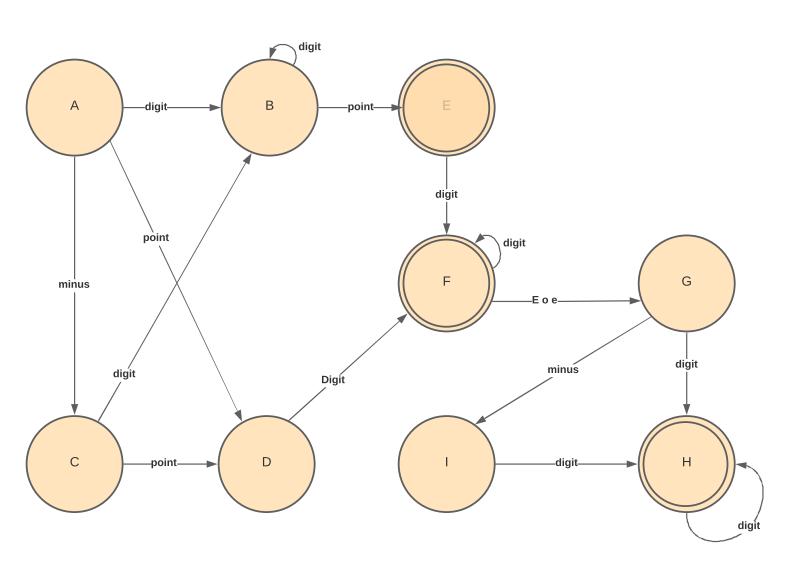



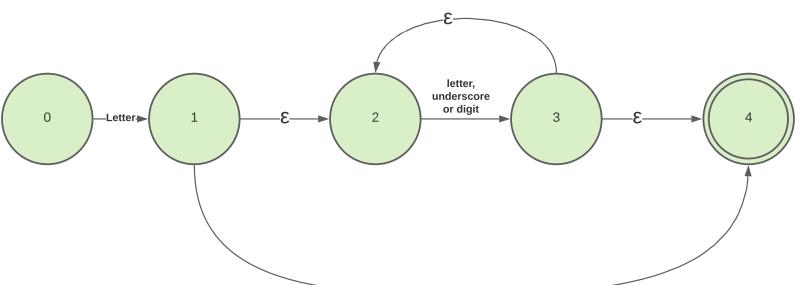



e-closure(0)=	: {0	}=A
------------	-----	------	-----

move(B,letter) ={3} e-closure(3)= {2,3,4} = C move (B,underscore)={3} e-closure(3)= {2,3,4} = C move(B,digit)={3} e-closure(3)= {2,3,4} = C

move(C,letter) ={3} e-closure(3)= {2,3,4} = C move (C,underscore)={3} e-closure(3)= {2,3,4} = C move(C,digit)={3} e-closure(3)= {2,3,4} = C

	letter	underscore	digit
А	В	NULL	NULL
В	С	С	С
С	С	С	С

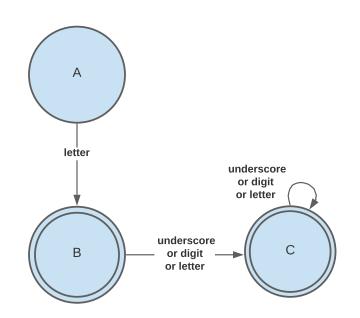

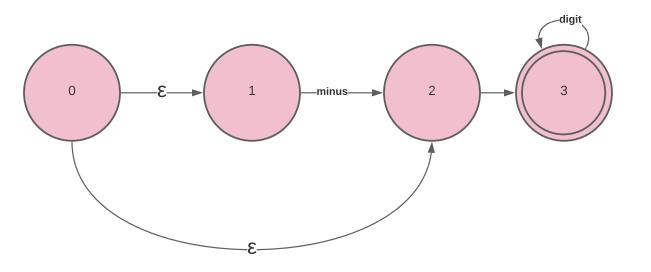

e-closure(0) ={1,2}=A


move(A,minus)={2} e-closure(2)={2}=B


move(A,digit)={3} e-closure(3) = {3}=C

move(B,minus) =NULL move(B,digit)={3} e-closure(3) = {3}=C

move(C,minus)=NULL move(C,digit)= {3} e-closure(3) = {3}=C

	minus	digit
А	В	NULL
В	NULL	С
С	NULL	С

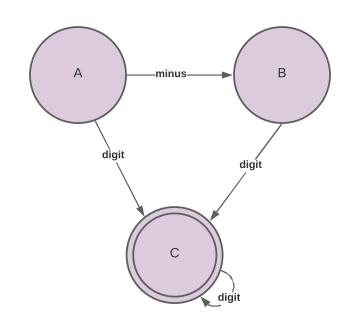

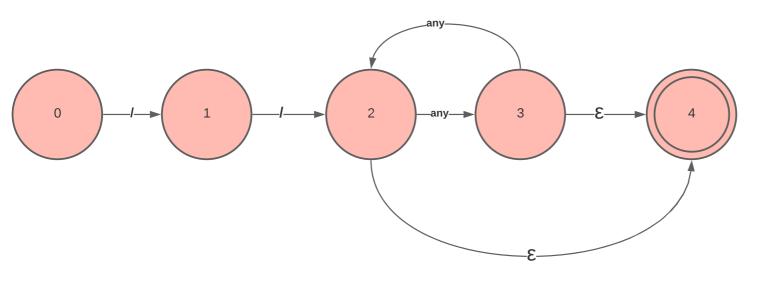

e-closure(0)= {0}=A move(A,/)={1} e-closure(1) ={1}=B

move(B,/)={2} e-closure(2) ={2,4}=C

move(C,any)={2,3} e-closure(2,3) ={2,3,4}=D

move(D,any)={2,3} e-closure(2,3) ={2,3,4}=D

	1	any
А	В	NULL
В	С	NULL
С	NULL	D
D	NULL	D

