

17


18

19

26

21

ø3.5

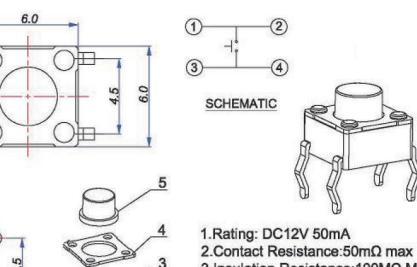

3.Insulation Resistance:100MΩ Min

4. Electrically Life:

100gf:100,000 cycles 180gf:80,000 cycles 250gf:60,000 cycles

5.Travel:0.25±0.1mm

6.General tolerance:±0.1mm

No.	NAME	MATERIAL	NATIONALITY	QTY	FINISHING
1	Terminal	Brass	China	1	Silverplating
2	Case	PA66	USA	1	Black
3	Contact	Phosphor bronze	Korea	1	Contact side silver plating
4	Cover	Brass	China	1	CuSn plating
5	Stem	PA66	USA	1	Black L≤9.5mm
		PC	China	1	Black L>9.5mm

## **GOLDSUN ELECTRONICS CO., LTD.** GOLDSUN NO. BTS-1102B-2-B JAMECO NO. 149948 Description "TACT SWITCH BLACK SPST Rev.

N.0 (N.C.) PC LEAD." CAS No: ERN No: UNIT: SCALE: SHEET 1 OF 1 mm