
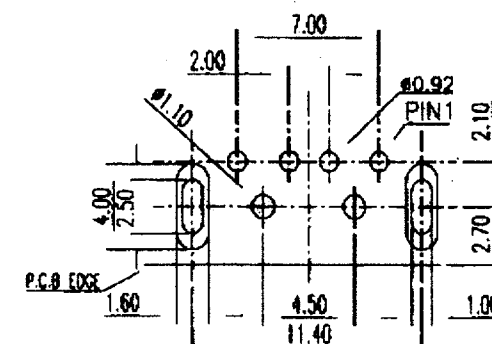


DESCRIPTION CONTROL			
REV	DESC	DATE	ECN NO

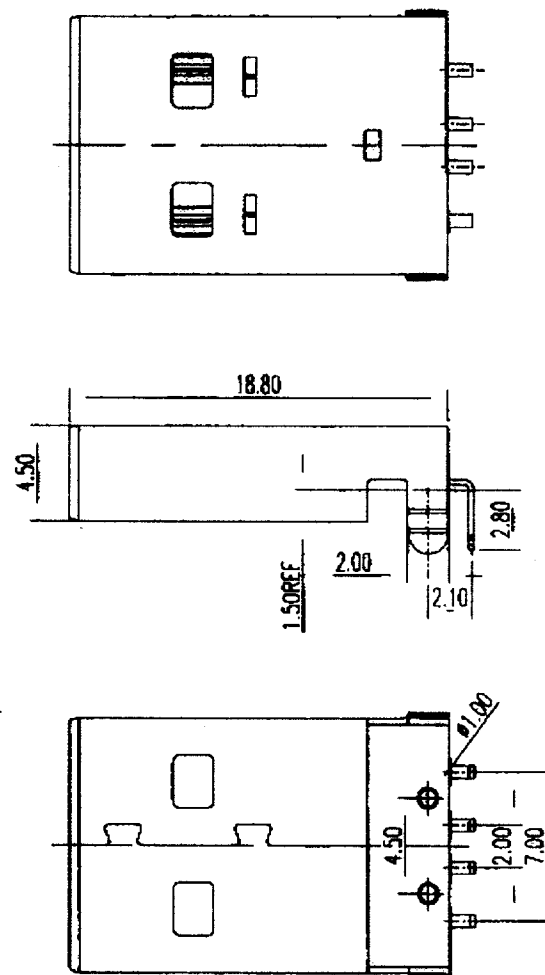

PCB LAYOUT REFERENCE DIMENSION
DIMENSION TOLERANCE ± 0.05

Specification

*Electrical Characteristics:

Contact Current Rating: 1 Amperes.

Dielectric Withstanding Voltage: AC 750V r.m.s.

Insulation Resistance: 1000 M Ω Minimum

Contact Resistance: 30 m Ω Maximum.

*Mechanical Characteristics:

Contact Insertion Force: 3.57kg Maximum.

Contact Separation Force: 1.02kg Minimum.

*Environmental:


Operating Temperature: $-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$.

*Materials:

Insulator: HI-Temp Plastic, UL94V-0.

Contacts: Copper Alloy ($t=0.25\text{mm}$)

Shell: Steel ($t=0.30\text{mm}$)



ITEM: USB A/M DIP 定位柱高
0.70(1.50) CUSTOMER

REV
R

DRAWN BY: EMILY

SCALE: NONE

DATE: 05.10.06

CHECKED BY: John Ho

CUSTOMER: C331

PAGE: 1/1

APPROVED BY: Jason Zhuang

CUSTOMER P/N:

ALL DIMENSIONS IN mm (UNLESS OTHERWISE SPECIFIED)