

## SPECIFICATION

Current Rate:3 AMP

Insulation Resistance:1000M  $\Omega$  Min.

Contact Resistance:20m  $\Omega$  Max.

Dielectric voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C

## MATERIAL

Insulator:Polyester,UL 94V-0◎Standard:P.B.T

Contact Pin:Brass

Tin,Gold plated◎Standard:Gold flash all over



## ORDER INFORMATION

PH1S25-1  $\frac{50}{1}$   $\frac{G}{2}$   $\frac{B}{3}$   $\frac{6.0/3.0}{4}$  -  $\frac{L}{5}$

◎1.25:Plastic height 2.5mm

◎2.No. of contacts per rows




◎3.G:Glod Flash

◎4.B:Black insulator

◎5.Dimension A/B

Recommend A=6.0 B=3.0

◎6.L:RoHS + P.B.T

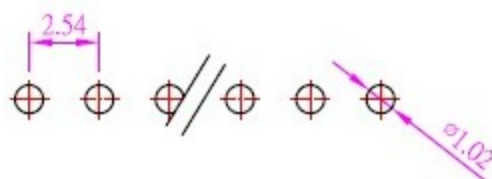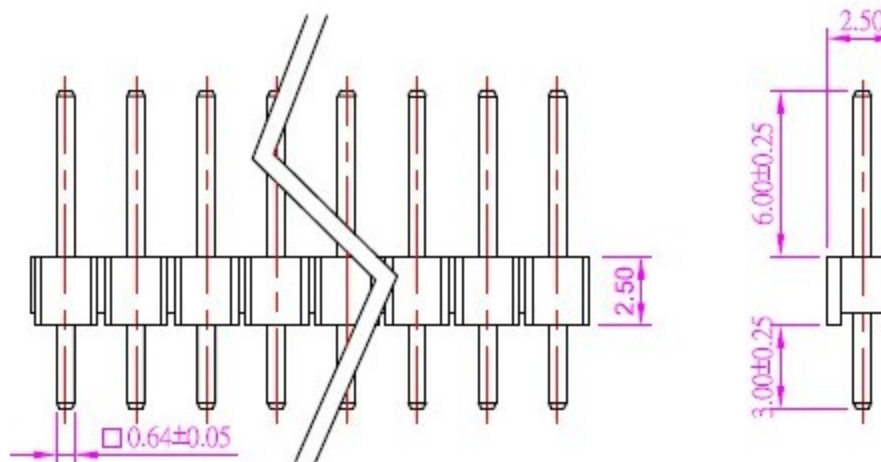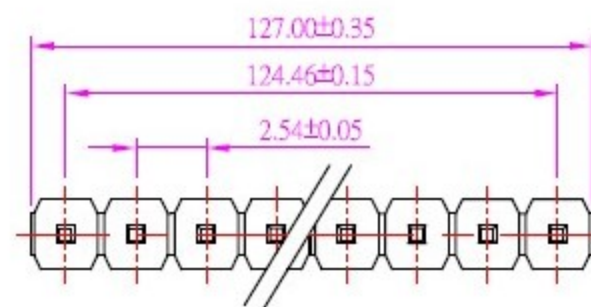

Recommended PCB Layout  
(PCB TOLERANCE  $\pm 0.05$ )

AREA	REV.	DESCRIPTION	DATE

品名 TITLE	PIN HEADER 2.54mm STRAIGHT TYPE PLASTIC HEIGHT 2.5mm				
品號 PART NO.	PH1S25-150GB6.0/3.0-L			日期 DATE	04/23/2007
圖號 DRAWING NO.	PH1S25-150-L	版本 REV.	A	繪圖 DRAWN	Mack
客戶品號 CUSTOMER P/N		比例 SCALE	3:1	核對 CHECKED	Paul
公差 TOLERANCE	.X $\pm 0.35$ .XX $\pm 0.25$	單位 UNIT	mm	核准 APPROVED	James