# **Thruster Report**

Magnetic Field: 265 mT Anode Power: 678 W Anode Current: 10.0 A

Propellant: Argon 2.000 mg/s

Thruster Details: Nagoya magnet, LaB6 cathode, 1 mm orifice, copper anode, 80 mm internal diameter.

Thrust	Thrust Eff.	ISP	Total DOF	Coverage	Exp.	Std.
				Factor	Uncertainty	Uncertainty
16.2 mN	9.7 %	826.0 sec	15	2.10	2.4 mN	1.1 mN

# **Thrust-Stand Uncertainty Components**

	Scale		Repeatability	Noise	Offset	Drift	
Value	0.9 mN	0.5 mN	0.2 mN	0.3 mN	0.3 mN	0.2 mN	
DOF	6	6	6	31	4	4	

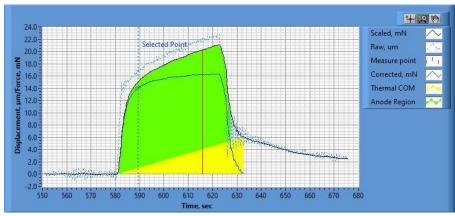


Figure 1. Thrust Plot

File Name: Philtech Data 2024.09.18\_08.57.39.csv

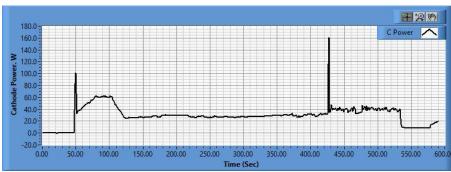


Figure 2. Cathode Power Plot

File Name: PSU C Data 2024.09.18\_08.58.27.csv

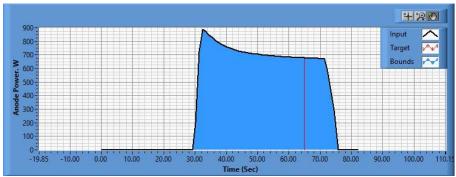


Figure 3. Anode Power Plot

File Name: PSU A Data 2024.09.18\_09.06.50.csv

## **Pre-Cal. Information**

File Name: BaseLine\_Magnet\_Philtech Data 2024.09.17\_13.36.23.csv

Start/Stop times (24 h): 13:36:24 13:40:10

Sensitivity: 1.27 um/mN

Offset	Drift	Scale Factor	Scale Std.Dev
-0.404 mN	-0.003 mN/s	0.786	0.872 mN

#### Plateau values:

| Weight |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0      | 1      | 2      | 3      | 4      | 5      | 4      | 3      | 2      | 1      | 0      |
| -0.1   | 12.9   | 27.2   | 41.3   | 52.8   | 67.9   | 52.0   | 40.5   | 26.8   | 12.6   | 0.3 mN |
| mN     |        |

## **Post-Cal. Information**

File Name: PostThrustPhiltech Data 2024.09.18\_08.57.39.csv

Start/Stop times (24 h): 08:58:02 09:01:48

Sensitivity: 1.29 um/mN

Offset	Drift	Scale Factor	Scale Std.Dev		
-0.028 mN	0.001 mN/s	0.776	1.066 mN		

#### Plateau values:

| Weight |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0      | 1      | 2      | 3      | 4      | 5      | 4      | 3      | 2      | 1      | 0      |
| -0.4   | 12.7   | 27.9   | 41.6   | 52.3   | 67.8   | 51.9   | 40.9   | 26.7   | 12.3   | -0.4   |
| mN     |

Created by: websteem 20/11/2024 3:06 PM Version: Analyser and Report Generator V191124