


COLOR CODING FOR RESISTORS

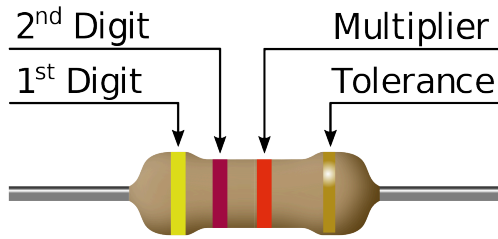

License CC BY-SA 4.0

www.picuinio.com

- Calculate the missing colors and resistors in the following tables.
- In the last column, calculate the current that will flow through the resistor when connected to a 9 volt battery.
- All values should be written to 3 decimal places and with the multiplier symbol that best corresponds to it (M=Mega, k=kilo, m=mili, μ =micro)


COLOR	VALUE	MULTIPLIER	TOLER- ANCE
BLACK	0	x 1	
BROWN	1	x 10	$\pm 1\%$
RED	2	x 100	$\pm 2\%$
ORANGE	3	x 1000	
YELLOW	4	x 10 000	
GREEN	5	x 100 000	
BLUE	6	x 1000 000	
VIOLET	7		
GREY	8		
WHITE	9		
GOLD		x 0.1	$\pm 5\%$

COMMERCIAL SERIES E6: (5%)

Value Ω	Stripe 1	Stripe 2	Stripe 3	Stripe 4	I = 9V / R
4.7 M Ω					
	RED	RED	BLACK	GOLD	409 mA
15 Ω					
	OR- ANGE	OR- ANGE	GOLD	GOLD	2.73 A
10 k Ω					
	BROWN	GREEN	BROWN	GOLD	60.0 mA
220 Ω					
	YELLOW	VIOLET	BLACK	GOLD	192 mA
3.3 k Ω					
	RED	RED	RED	GOLD	4.09 mA

Value Ω	Stripe 1	Stripe 2	Stripe 3	Stripe 4	I = 9V / R
100 Ω					
	BLUE	GREY	BROWN	GOLD	13.2 mA
22 k Ω					
	BROWN	BLACK	YELLOW	GOLD	90.0 μ A
1.0 Ω					
	BLUE	GREY	OR- ANGE	GOLD	132 μ A
680 k Ω					
	OR- ANGE	OR- ANGE	GREEN	GOLD	2.73 μ A
1.5 k Ω					
	YELLOW	VIOLET	RED	GOLD	1.91 mA
2.2 Ω					
	BROWN	BLACK	BLACK	GOLD	900 mA
2.2 M Ω					
	BROWN	GREEN	OR- ANGE	GOLD	600 μ A
330 k Ω					
	RED	RED	YELLOW	GOLD	40.9 μ A
4.7 Ω					
	BLUE	GREY	GREEN	GOLD	1.32 μ A
470 Ω					
	BROWN	BLACK	RED	GOLD	9.00 mA
47 k Ω					
	BROWN	GREEN	GOLD	GOLD	6.00 A
33 Ω					
	BROWN	GREEN	GREEN	GOLD	6.00 μ A
150 k Ω					
	BLUE	GREY	GOLD	GOLD	1.32 A
68 Ω					
	OR- ANGE	OR- ANGE	BROWN	GOLD	27.3 mA
1.0 M Ω					
	OR- ANGE	OR- ANGE	OR- ANGE	GOLD	273 μ A
6.8 k Ω					
	YELLOW	VIOLET	YELLOW	GOLD	19.2 μ A

COLOR CODING FOR RESISTORS

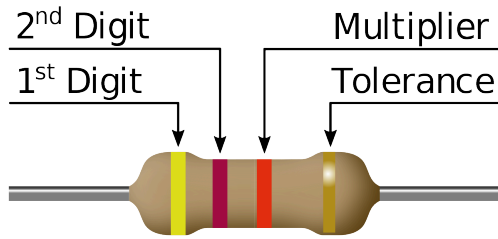

License CC BY-SA 4.0

www.picuno.com

- Calculate the missing colors and resistors in the following tables.
- In the last column, calculate the current that will flow through the resistor when connected to a 9 volt battery.
- All values should be written to 3 decimal places and with the multiplier symbol that best corresponds to it (M=Mega, k=kilo, m=mili, μ =micro)

COLOR	VALUE	MULTIPLIER	TOLER- ANCE
BLACK	0	x 1	
BROWN	1	x 10	$\pm 1\%$
RED	2	x 100	$\pm 2\%$
ORANGE	3	x 1000	
YELLOW	4	x 10 000	
GREEN	5	x 100 000	
BLUE	6	x 1000 000	
VIOLET	7		
GREY	8		
WHITE	9		
GOLD		x 0.1	$\pm 5\%$

COMMERCIAL SERIES E6: (5%)

Value Ω	Stripe 1	Stripe 2	Stripe 3	Stripe 4	I = 9V / R
	YELLOW	VIOLET	GREEN	GOLD	1.91 μ A
22 Ω					
	BROWN	GREEN	BLACK	GOLD	600 mA
3.3 Ω					
	BROWN	BLACK	OR- ANGE	GOLD	900 μ A
150 Ω					
	RED	RED	BROWN	GOLD	40.9 mA
47 Ω					
	OR- ANGE	OR- ANGE	RED	GOLD	2.73 mA
2.2 k Ω					

Value Ω	Stripe 1	Stripe 2	Stripe 3	Stripe 4	I = 9V / R
	BROWN	BLACK	BROWN	GOLD	90.0 mA
680 Ω					
	RED	RED	OR- ANGE	GOLD	409 μ A
100 k Ω					
	BROWN	BLACK	GOLD	GOLD	9.00 A
68 k Ω					
	BLUE	GREY	YELLOW	GOLD	13.2 μ A
3.3 M Ω					
	BROWN	GREEN	RED	GOLD	6.00 mA
4.7 k Ω					
	RED	RED	GOLD	GOLD	4.09 A
10 Ω					
	RED	RED	GREEN	GOLD	4.09 μ A
15 k Ω					
	OR- ANGE	OR- ANGE	YELLOW	GOLD	27.3 μ A
220 k Ω					
	YELLOW	VIOLET	GOLD	GOLD	1.91 A
6.8 M Ω					
	YELLOW	VIOLET	BROWN	GOLD	19.2 mA
1.0 k Ω					
	YELLOW	VIOLET	OR- ANGE	GOLD	192 μ A
1.5 Ω					
	OR- ANGE	OR- ANGE	BLACK	GOLD	273 mA
1.5 M Ω					
	BROWN	GREEN	YELLOW	GOLD	60.0 μ A
6.8 Ω					
	BLUE	GREY	BLACK	GOLD	132 mA
330 Ω					
	BROWN	BLACK	GREEN	GOLD	9.00 μ A
33 k Ω					
	BLUE	GREY	RED	GOLD	1.32 mA
470 k Ω					