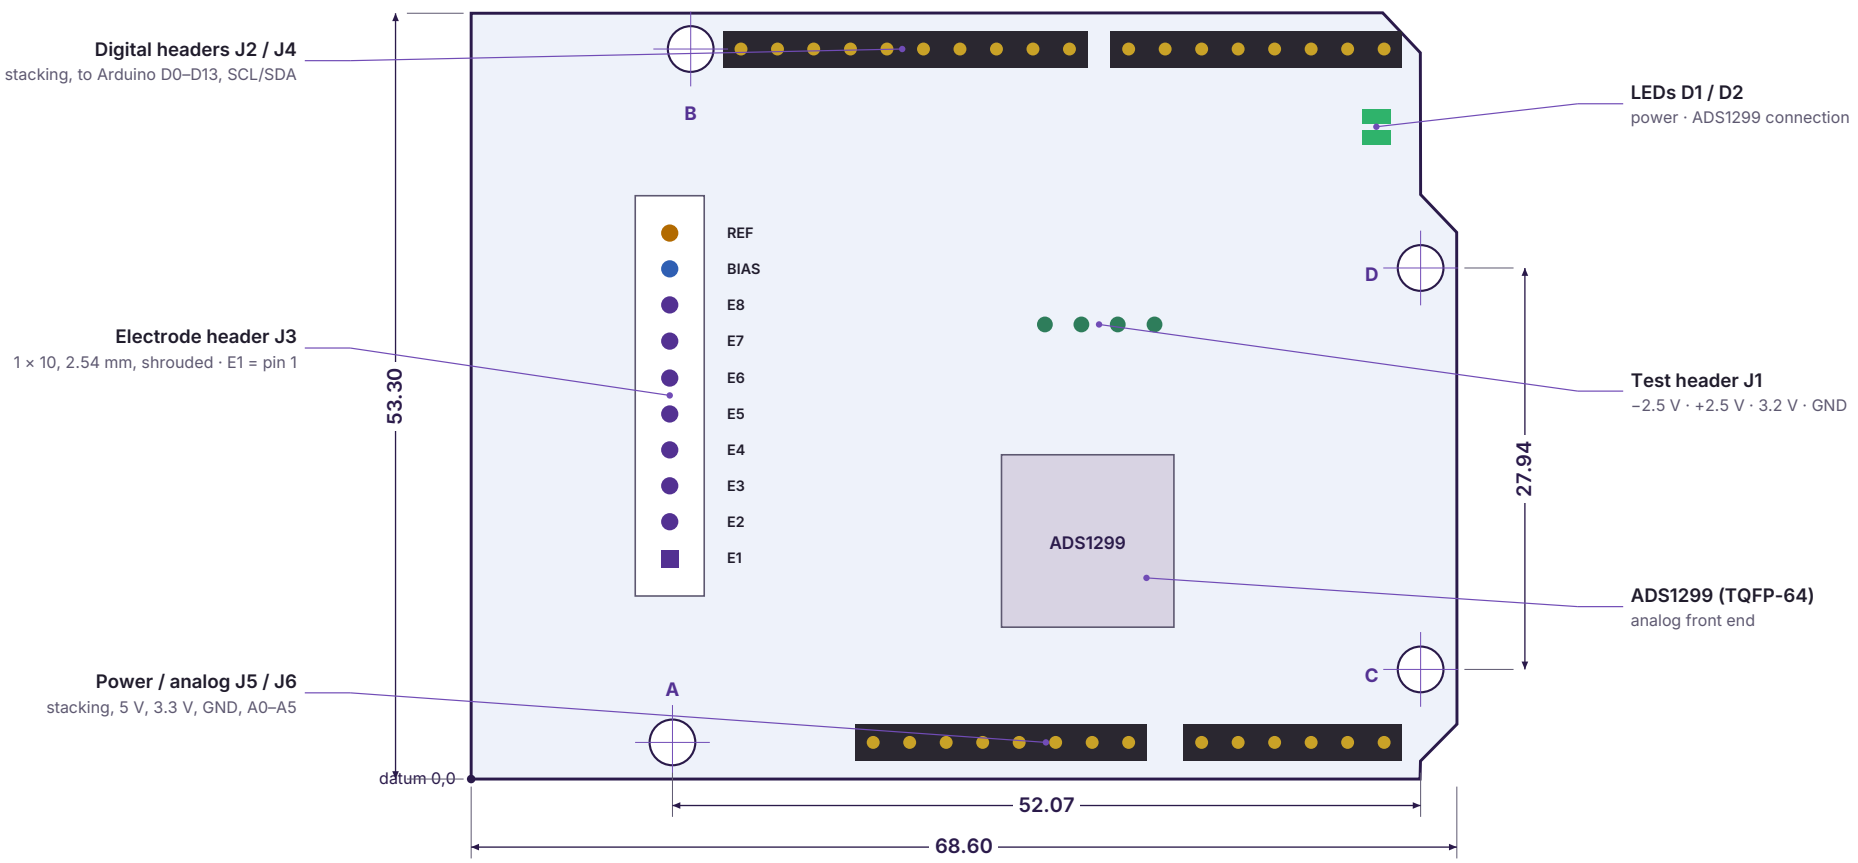


Hole	X	Y	Ø	Use
A	14.01	2.55	3.18	M3 / Arduino
B	15.28	50.81	3.18	M3 / Arduino
C	66.08	7.63	3.18	M3 / Arduino
D	66.08	35.57	3.18	M3 / Arduino


- Outline and holes follow the Arduino UNO, so the shield lines up with the UNO R4 WiFi.
- Holes: Ø3.18 mm (0.125"), plated area; C–D spacing 27.94 mm.
- Headers on 2.54 mm pitch, on the UNO grid.

Title	ardEEG outline & interfaces
Doc. No.	AE-MD-002
Revision	Rev. A · 10 Nov 2026
Board	ardEEG V1.0
Units	mm; datum lower-left corner
Scale	1.9 : 1 (A4 print)


For research and education only. Not a medical device. Specifications subject to change.

02 INTERFACE LOCATIONS

Interface	Position from datum (mm)	Details
Electrode header J3	X 13.82; Y 15.34 (E1) … 38.00 (Ref)	1 × 10, 2.54 mm shrouded male header: E1…E8, Biasout, Ref; pin 1 = E1
Digital header J2	Y 50.81; X 18.78 (SCL) … 41.64 (D8)	10-pin stacking header: SCL, SDA, AREF, GND, D13…D8
Digital header J4	Y 50.81; X 45.76 (D7) … 63.54 (D0)	8-pin stacking header: D7…D0; D7 = DRDY
Power header J5	Y 2.55; X 27.98 … 45.76	8-pin stacking header: NC, IOREF, RESET, 3.3 V, 5 V, GND, GND, VIN
Analog header J6	Y 2.55; X 50.84 … 63.54	6-pin stacking header: A0…A5 (free)
Test header J1	Y 31.64; X 39.93 … 47.56	4-pin socket: −2.5 V, +2.5 V, 3.2 V, GND (supply check)
LEDs D1 / D2	X 63.0; Y 46.1 / 44.7	D1 power · D2 ADS1299 connection
Mounting holes	see hole table, page 1	4 × Ø3.18 mm, Arduino UNO pattern

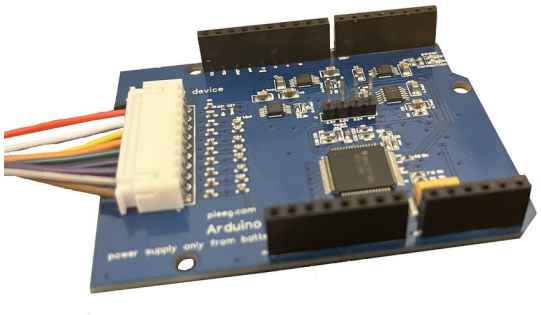

ardEEG shield, electrode cable fitted.

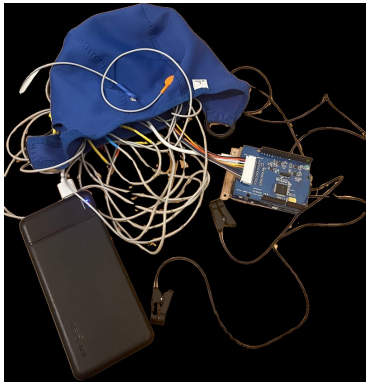

Shield on the Arduino with cap and power bank.

NOTE Stacking.

Long-leg stacking headers pass through to the Arduino and keep the Arduino pins reachable from the top, so a further shield can sit above ardEEG. Keep the electrode header and LEDs clear.

CAUTION Handling.

Fit or remove the shield only with the Arduino unpowered. Line up all four headers and press down evenly; do not bend the legs.

For research and education only. Not a medical device. Specifications subject to change.