

Minitel 2 <-> Heltec WiFi LoRa 32 V3 interface (stripboard)

Minitel DIN-5: open-collector TTL, receiver supplies the pull-up. 1200/4800/9600 bd 7E1.


GPIO48 = UART TX with output inversion (Q1 inverts). GPIO47 = UART RX, not inverted.

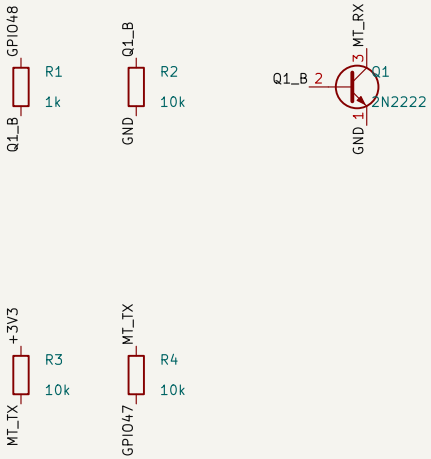

Wire pads to the Heltec V3



Wire pads to the DIN-5 male plug



DIN4 (PT) and DIN5 are left unconnected: PT is ignored in 80-col modes,

and pin 5 is a supply output (8.5-15 V) on the Minitel 2 — never wire it to the ESP.

Power: Heltec V3 from USB 5 V. Only GND is shared with the Minitel.

Sheet: /
File: minitel_if.kicad_sch

Title: Minitel companion — DIN-5 interface

Size: A4	Date:	**Rev: 1**
KiCad E.D.A. 10.0.7		Id: 1/1