

Pranav H
19252520

SIMATS ENGINEERING
ASSESSMENT TOOL 1

COURSE NAME: COMPUTER NETWORKS
COURSE CODE: CSA0720

COURSE OUTCOME COVERED

CO4:

Design network topologies star, mesh, bus, and hybrid using networking devices, transmission media, and cabling standards
(BL2, BL6)

Assessment Tool Weightage: 40%

Annexure A

Coding challenge

- 81.51%
1. Develop a Python program that generates a Star Topology for a given number of hosts connected to a central switch. The program should accept the number of hosts as input and display the topology either in ASCII format or a graphical representation. For each host, print the host label, the name of the central switch, and the corresponding Cat6 UTP cable length connecting the host to the switch. Verify that all hosts are connected through the central switch and explain how the star topology facilitates reliable communication in a local area network.
 2. Write a Python function named `validate_segment(length_m)` to verify whether a given **UTP cable segment** satisfies the IEEE 802.3 Ethernet standard, which specifies a maximum cable length of **100 meters**. The function should return **True** for valid cable lengths and return **False** along with an appropriate error message for invalid lengths exceeding the permissible limit. Demonstrate the correctness of the program by executing it with at least **three different test cases** and interpret the results.

3. Develop a Python program to simulate the operation of the Carrier Sense Multiple Access with Collision Detection (CSMA/CD) protocol in a star topology consisting of four hosts connected through a central switch. The program should simulate frame transmission attempts, detect transmission collisions, calculate random back-off intervals, and continue transmission after the waiting period. Record every collision event, transmission attempt, and back-off interval in a log file named `csma_log.txt`, and analyze how CSMA/CD minimizes data transmission conflicts in Ethernet networks.
4. Develop a client-server application using Python's socket library to simulate communication between two hosts connected through a central switch in a star topology. The server should receive frames from the client, forward them appropriately, and maintain a simulated MAC Address Table. After each successful frame transmission, display the updated MAC address table showing the learned MAC addresses and associated ports. Explain how MAC learning and frame forwarding are performed in Ethernet switches.
5. Design and implement a Python class named `StarSwitch` that models the basic functionality of an Ethernet switch. The class should include methods such as `add_port(host_id)` to connect a host, `remove_port(host_id)` to disconnect a host, and `broadcast(frame)` to transmit a frame to all connected ports except the source port. The program should maintain a record of active ports and log every broadcast operation, indicating the source host and the destination hosts that successfully receive the frame. Demonstrate the implementation using multiple hosts and explain the significance of broadcasting in Ethernet communication.

RUBRICS FOR CALCULATION

Criteria	Weightage	Exemplary (4)	Proficient (3)	Developing (2)	Beginning (1)
A Problem Understanding	15%	Fully understands the problem and requirements; no clarification needed 3	Understands most requirements with minor clarification	Partial understanding; misses some requirements	Poor understanding of the problem
B Algorithm Design	20%	Efficient, optimal, and well-structured algorithm 4	Correct algorithm with minor inefficiencies	Basic approach but not optimal	Incorrect or no clear algorithm
C Code Quality	15%	Clean, well-organized, readable, and properly formatted code 3	Mostly clean code with minor issues	Code is somewhat unclear or inconsistent	Poorly written, unreadable code
D Functionality	20%	Code works perfectly for all test cases 4	Works for most test cases	Works for limited cases	Does not run or fails major cases
E Error Handling	10%	Handles all edge cases and errors effectively 2	Handles some edge cases	Limited error handling	No error handling
F Efficiency	10%	Highly optimized in time and space complexity 2	Reasonably efficient	Some inefficiencies	Highly inefficient
G Documentation & Comments	5%	Clear and meaningful comments and documentation 1	Adequate comments	Few or unclear comments	No comments
H Testing & Debugging	5%	Thoroughly tested with multiple cases; no bugs 1	Tested with some cases	Minimal testing	No testing done

	A	B	C	D	E	F	G	H	
21	3	3	3	4	2	1	1	1	18
22	2	4	3	3	1	1	1	1	16
23	3	3	2	3	1	1.5	1	1	15.5
24	3	4	2	4	1	1.5	0.5	1	17
5	2	3	3	2	1.5	2	0.5	1	15
									11.5

SIMATS ENGINEERING ASSESSMENT TOOL 2

COURSE NAME: COMPUTER NETWORKS
COURSE CODE: CSA07

COURSE OUTCOME COVERED

CO4:

Design network topologies star, mesh, bus, and hybrid using networking devices, transmission media, and cabling standards

(BL2,BL6)

Assessment Tool Weightage: 30%

Annexure A

Industry Problem-Solving Task


Question 1:

Design a network topology for a 20-person startup company. Justify your choice of networking topology, devices, transmission media, and cabling standards.

- 1. Answer:** A star topology is ideal for a 20-person startup because all devices connect to a central switch, making the network easy to manage and troubleshoot. At the core sits a Layer 2/Layer 3 managed switch (such as a Cisco Catalyst or Netgear ProSafe) with at least 24 ports to accommodate all workstations, printers, and VoIP phones with room to grow. Each device connects to the switch using Cat6 UTP cables, which support Gigabit speeds up to 100 meters — more than sufficient for any typical office floor plan. The switch uplinks to a router/firewall (such as a Cisco RV series or pfSense appliance) that handles internet access, DHCP, and network address translation. A Wi-Fi access point connected to the switch extends wireless coverage for laptops and mobile devices. The key advantage of this design is fault isolation: if one

workstation's cable fails, only that single node goes offline, leaving all other 19 employees unaffected. Centralised cable management also simplifies future moves, adds, and changes.

Star Topology - 20-Person Startup Office

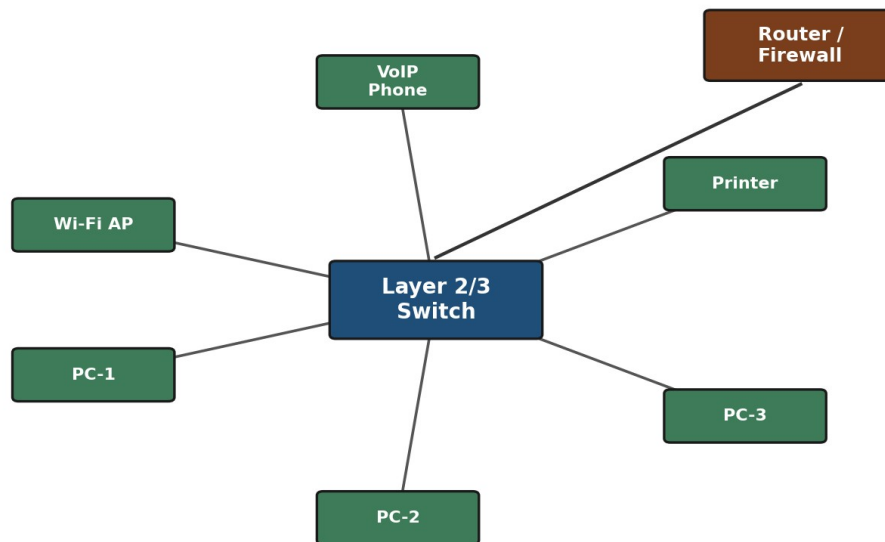


Question 2:

A bank requires near-zero downtime for its daily operations. Design a suitable network topology and justify your choice of devices, transmission media, and cabling standards.

2. **Answer:** A bank demands near-zero downtime, making a full or partial mesh topology the right choice. In a full mesh, every core network device — routers, core switches, and servers — connects directly to every other device, so no single link or node failure can bring down the network. For a bank, a partial mesh is typically deployed at the core layer (connecting all core switches and firewalls to each other) while the distribution and access layers use redundant uplinks to at least two core switches. Dual enterprise-

grade routers (such as Cisco ASR or Juniper MX series) provide BGP-based redundant internet connectivity. All links between core devices use fiber optic cables — either single-mode for long distances between buildings or multi-mode OM4 within the data center — because fiber is immune to electromagnetic interference, supports very high bandwidth, and is essential for maintaining low-latency financial transactions. Redundant power supplies, UPS systems, and RAID storage arrays further complement the mesh design. The justification is straightforward: when a link fails in a mesh, traffic automatically reroutes through alternative paths in milliseconds using protocols like OSPF or BGP, satisfying regulatory requirements for uptime and data integrity.

Partial/Full Mesh Core - Bank Network

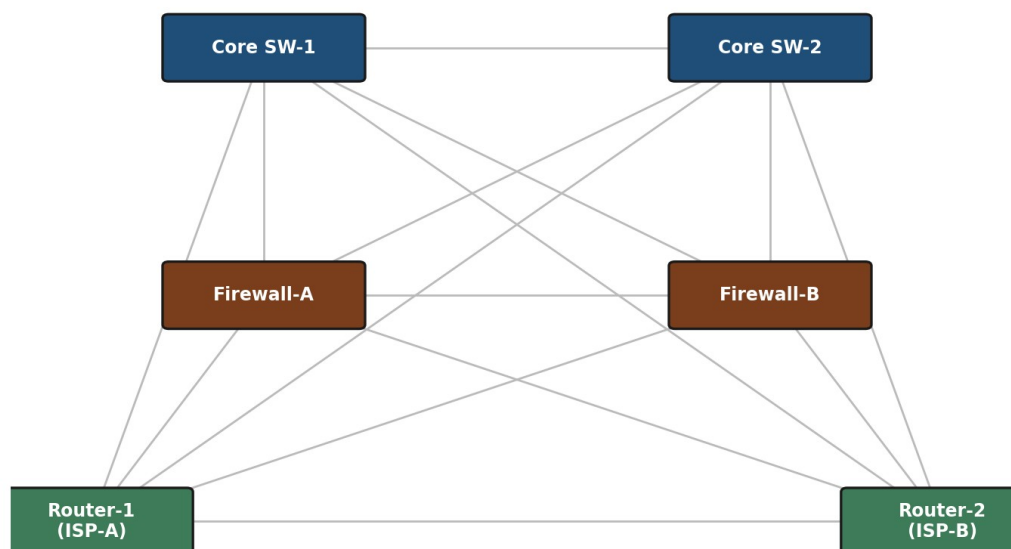


Question 3:

Design a low-cost network topology for a small classroom lab with a tight budget. Justify your choice of topology, networking devices, and cabling.

3. Answer: For a small classroom lab with a tight budget, bus topology offers the lowest hardware cost because all computers share a single common communication line — the bus — eliminating the need for a central switch or hub. A single coaxial cable (RG-58, 50-ohm) or, in a modern variation, a single Cat5e/Cat6 cable daisy-chained through an inexpensive unmanaged hub runs along the length of the room. Each computer connects to the backbone using a T-connector and a BNC connector in a classic coaxial setup, with terminators (50-ohm) placed at both ends of the cable to absorb signals and prevent reflection. For a more contemporary low-cost implementation, a single inexpensive 8- or 16-port unmanaged switch replaces the terminators and uses Cat5e UTP patch cables to each workstation — achieving bus-like simplicity at minimal cost. The primary limitation is that the network is susceptible to collisions and a single cable break disrupts all connected machines, but for a supervised classroom environment with light usage (internet browsing, file sharing), this trade-off is entirely acceptable. No dedicated server is required; a teacher's PC can share resources using built-in Windows/Linux file sharing.

Bus Topology - Classroom Lab (Low-Cost)

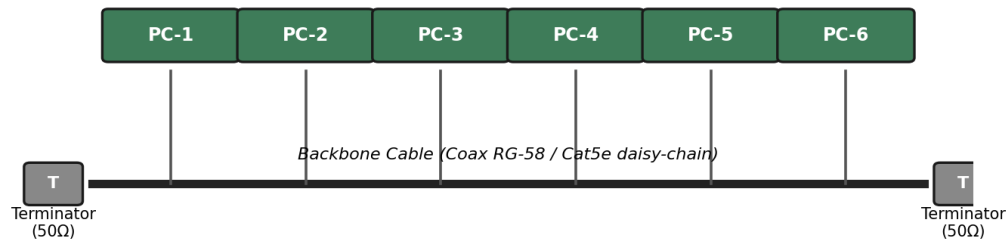


Question 4:

Design a network topology for a large university campus with multiple buildings (lecture halls, labs, libraries, dormitories, and administration). Justify your choice of topology, networking devices, and cabling standards.

- 4. Answer:** A large university campus serves thousands of users across multiple buildings — lecture halls, labs, libraries, dormitories, and administration — making a single topology inadequate. A hybrid topology combines the best elements of multiple designs: a fiber-based ring or mesh at the campus backbone level for redundancy, a star topology within each building for manageability, and bus or tree structures within individual labs for cost-efficiency. At the campus core, high-speed fiber optic cables (single-mode, 10 Gbps or 40 Gbps) interconnect core routers and multilayer switches using a ring or partial mesh arrangement, ensuring that no single link failure isolates an entire building. Each building has its own

distribution switch connected to the campus core via dual fiber uplinks. Within each building, a traditional star topology branches from the distribution switch to floor-level access switches, which then connect individual devices via Cat6 cables. This hierarchical three-layer model — core, distribution, and access — is the industry standard for enterprise and campus networks because adding a new building simply means installing a new distribution switch and running fiber to the core, with no disruption to existing infrastructure. Wireless access points throughout the campus connect via PoE (Power over Ethernet) to access switches, eliminating the need for separate power cabling. The hybrid design thus delivers redundancy at the backbone, simplicity at the building level, and scalability campus-wide.

Hybrid Topology - University Campus (Core/Distribution/Access)

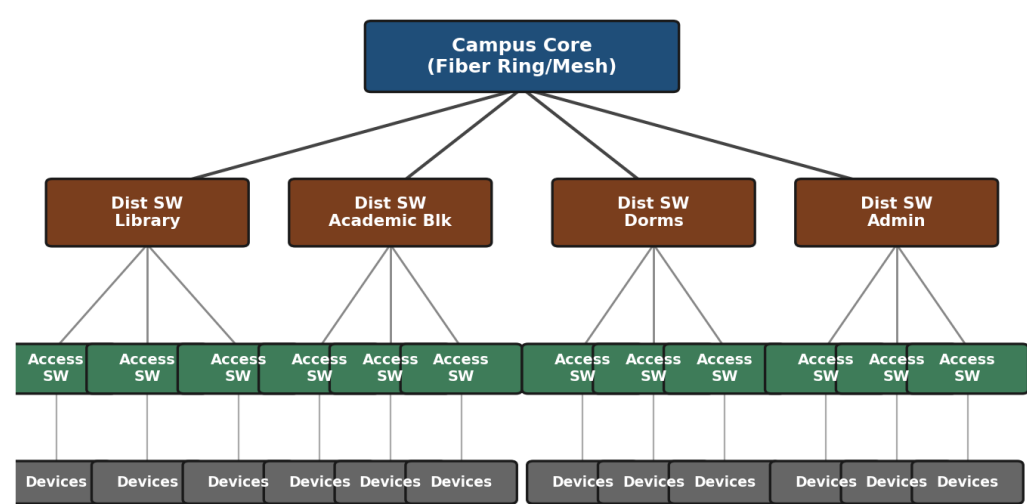


Question 5:

Design a network for a company with multiple departments (HR, Finance, Sales, and IT). Explain the architecture using switches and routers to ensure efficient communication and security.

5. Answer: Designing a network for a company with multiple departments involves creating a structured and scalable architecture using switches and routers to ensure efficient communication and security. Each department (such as HR, Finance, Sales, and IT) is connected through dedicated Layer 2 switches that form the access layer, allowing devices like computers and printers to communicate within the same department. These switches are then connected to a central Layer 3 switch or router, which acts as the core layer and enables communication between different departments through inter-VLAN routing. Virtual LANs (VLANs) are configured to logically separate each department's network, improving security and reducing broadcast traffic. A router is also used to connect the internal network to external networks such as the internet, often with firewall functionality for security. Redundant links and backup paths can be included to ensure reliability, while proper IP addressing and subnetting are applied for efficient network management. This hierarchical design improves performance, enhances security, and allows easy expansion as the company grows.

Multi-Department Network with VLANs

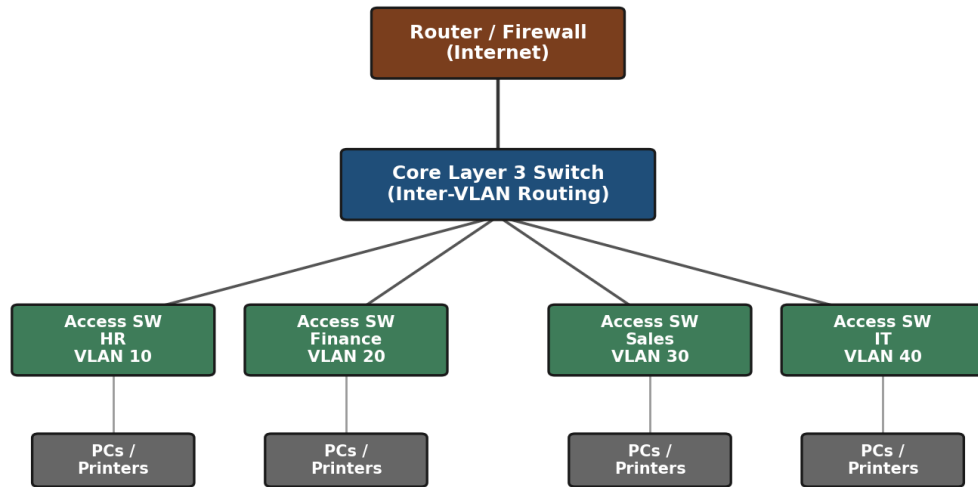

RUBRICS FOR CALCULATION

Criteria	Weightage	Exemplary (4)	Proficient (3)	Developing (2)	Beginning (1)
Problem Analysis	15%	Clearly identifies and deeply analyzes the industry problem with all factors	Good understanding with minor gaps	Basic understanding; some key aspects missing	Poor or incorrect understanding of the problem
Solution Design	20%	Innovative, practical, and industry-relevant solution	Effective solution with minor limitations	Partially suitable solution	Inappropriate or unclear solution
Technical Implementation	20%	Fully functional, accurate, and well-executed implementation	Mostly functional with minor errors	Partially implemented solution	Incomplete or non-functional implementation
Use of Tools & Technologies	10%	Appropriate and advanced use of relevant tools and technologies	Correct use of tools	Limited or basic use of tools	Incorrect or no use of tools
Problem-Solving Approach	10%	Logical, systematic, and well-structured approach	Mostly logical approach	Somewhat disorganized approach	No clear approach
Innovation & Creativity	10%	Highly creative and original solution	Some creativity	Limited originality	No creativity
Testing & Validation	5%	Thorough testing with real-world scenarios	Adequate testing	Minimal testing	No testing
Documentation & Presentation	5%	Clear, professional, and well-documented	Good documentation	Basic documentation	Poor or no documentation
Teamwork / Collaboration	5%	Excellent coordination and contribution	Good collaboration	Limited participation	No collaboration or contribution

Criteria	Weightage	Exemplary (4)	Proficient (3)	Developing (2)	Beginning (1)
		(if team-based)			