View / **P643.47** White / Black

iGuzzini

PART OF

VIEW 210X146MM

DESCRIPTION

large body - warm white - wide flood optic

VWF - Very Wide Flood 82° / 106°
34.7 W system
3608 lm system
104 lm/W
3000 K
CRI 82 - Rf (Colour Fidelity Index) 85 - Rg (Gamut Index) 97
DALI-2

DESIGNED BY

iGuzzini / Arup

SELECTED COLOUR

47 White / Black STANDARD

Specification sheet generated on 25/08/2026

TECHNICAL DATA

LAST UPDATE: 05/08/2026

DESCRIPTION

Adjustable spotlight with adapter for installation on electrified track for a linear PCB LED lamp with a Warm White (3000K) tone. Product complete with super pure anodized aluminium reflector to guarantee wide flood light distribution. DALI ballast integrated in the body. Die-cast aluminium optical assembly. Rotates 360° about the vertical axis and tilts 90° relative to the horizontal plane. Passive heat dissipation. Option of installing a range of outdoor accessories including an anti-glare and an asymmetric screen.

DIMENSIONS

General (mm)	210x146



TECHNICAL PERFORMANCE

Class I

IP20 Protected against penetration of solids larger than 12 mm, not protected against penetration of liquids.

IP40 Protected against the penetration of solids larger than 1 mm, not protected against penetration of liquids.
For optical assembly

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)	2.11
Material	Aluminium and thermoplastic

iGuzzini illuminazione S.p.A
Via Mariano Guzzini 37
62019 Recanati (Italy)
Share Capital €21.050.000,00 i.v.
VAT N. and R.I. : (IT)00082630435
CCIAA Macerata, R.E.A. 40632

iGuzzini

PRODUCT CERTIFICATION

BIS	CCC S&E	CE	EAC
ENEC-03	NOM	RETILAP	TISI - THAI INDUSTRIAL STANDARD INSTITUTE
UK CONFORMITY ASSESSED			

iGuzzini illuminazione S.p.A
Via Mariano Guzzini 37
62019 Recanati (Italy)
Share Capital €21.050.000,00 i.v.
VAT N. and R.I. : (IT)00082630435
CCIAA Macerata, R.E.A. 40632

PHOTOMETRIC DATA

DETAILS

Optic and beam angle	VWF - Very Wide Flood 82° / 106°
lm system	3608
W system	34.7
lm source	4400
W source	31
Luminous efficiency - lm/W (system value)	104
lm in emergency mode	-
Maximum intensity (cd)	1717
Total light flux at or above an angle of 90° (Lm)	0
Light output ratio (LOR)	82
Optic and beam angle	VWF - Very Wide Flood 82° / 106°
Adjustability	directional
Light colour quality	CRI 82 - Rf (Colour Fidelity Index) 85 - Rg (Gamut Index) 97
Colour temperature	3000 K
MacAdam Step	3
Lifetime LED 1	>50,000h - L90 - B10 (Ta 25°C)

CHARTS AND POLAR CURVES

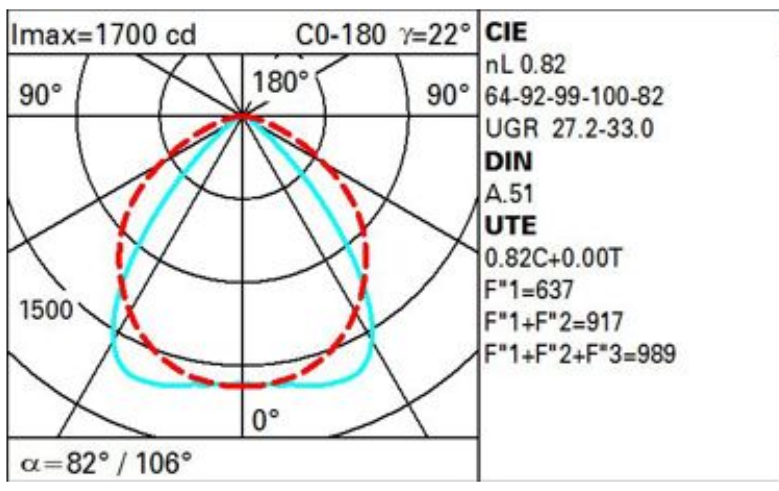

Lux

h	d1	d2	Em	Emax
1	1.7	2.7	1085	1620
2	3.5	5.3	271	405
3	5.2	8	121	180
4	6.9	10.6	68	101

R	77	75	73	71	55	53	33	00	DRR
K0.8	60	53	48	44	52	47	47	42	51
1.0	65	59	54	50	58	53	53	48	59
1.5	73	68	64	61	67	63	62	58	71
2.0	77	73	70	67	72	69	68	64	78
2.5	80	76	74	71	75	72	72	68	83
3.0	81	79	76	74	77	75	74	71	86
4.0	83	81	79	77	79	78	76	73	89
5.0	84	82	81	79	81	79	78	75	91

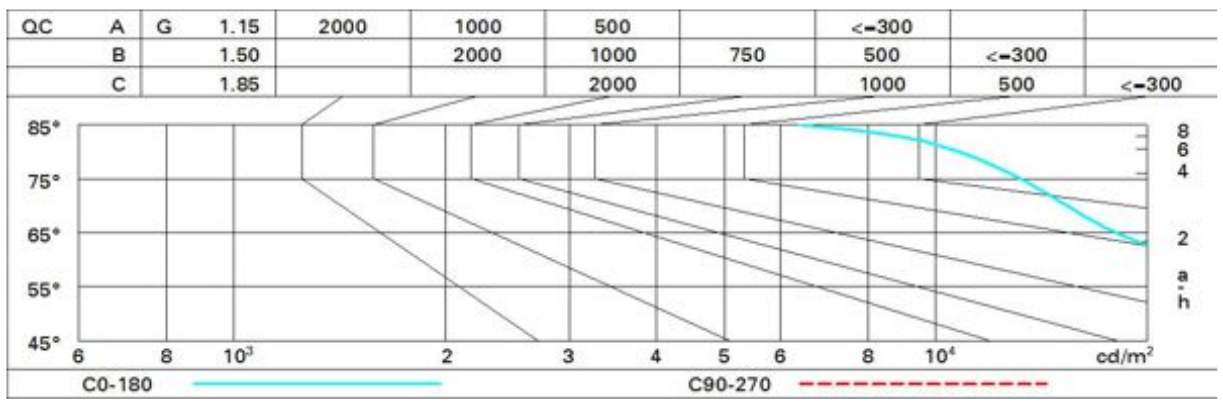

Corrected UGR values (at 4400 lm bare lamp luminous flux)

Riflect.:											
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	26.7	27.6	27.0	27.8	28.1	31.8	32.7	32.1	33.0	33.2
	3H	26.6	27.4	26.9	27.7	28.0	31.8	32.6	32.2	32.9	33.2
	4H	26.6	27.3	26.9	27.6	27.9	31.8	32.5	32.1	32.8	33.1
	6H	26.5	27.2	26.9	27.5	27.9	31.7	32.4	32.1	32.7	33.0
	8H	26.5	27.1	26.9	27.5	27.8	31.7	32.3	32.0	32.6	33.0
	12H	26.5	27.1	26.8	27.4	27.8	31.6	32.2	32.0	32.6	32.9
4H	2H	27.3	28.1	27.7	28.4	28.7	33.0	33.7	33.3	34.0	34.3
	3H	27.3	27.9	27.7	28.2	28.6	33.2	33.8	33.5	34.1	34.5
	4H	27.2	27.8	27.6	28.2	28.5	33.1	33.7	33.5	34.1	34.4
	6H	27.2	27.7	27.6	28.1	28.5	33.1	33.6	33.5	34.0	34.4
	8H	27.2	27.6	27.6	28.0	28.5	33.0	33.5	33.5	33.9	34.3
	12H	27.1	27.5	27.6	27.9	28.4	33.0	33.4	33.4	33.8	34.3
8H	4H	27.4	27.8	27.8	28.2	28.7	33.4	33.8	33.8	34.2	34.7
	6H	27.3	27.7	27.8	28.2	28.6	33.4	33.7	33.8	34.2	34.7
	8H	27.3	27.6	27.8	28.1	28.6	33.3	33.7	33.8	34.1	34.6
	12H	27.3	27.5	27.8	28.0	28.6	33.3	33.6	33.8	34.1	34.6
12H	4H	27.4	27.8	27.8	28.2	28.7	33.4	33.8	33.8	34.2	34.7
	6H	27.3	27.7	27.8	28.1	28.6	33.4	33.7	33.9	34.2	34.7
	8H	27.3	27.6	27.8	28.1	28.6	33.4	33.6	33.9	34.1	34.6

Variations with the observer position at spacing:

S =	1.0H	1.7 / -3.4	0.4 / -0.4
	1.5H	2.7 / -5.8	0.6 / -1.2
	2.0H	4.0 / -7.0	1.5 / -1.6

iGuzzini illuminazione S.p.A
Via Mariano Guzzini 37
62019 Recanati (Italy)
Share Capital €21.050.000,00 i.v.
VAT N. and R.I. : (IT)00082630435
CCIAA Macerata, R.E.A. 40632

ELECTRICAL DATA

Voltage	220 - 240
ZVEI code	LED
Power Supply	Electronic Driver included
Mounting options	Integral
Control	DALI-2

INSTALLATION

DESCRIPTION

On an electrified track or base

Mounting	Three circuit track, Ceiling surface
Wiring	Product complete with electronic components

iGuzzini illuminazione S.p.A
Via Mariano Guzzini 37
62019 Recanati (Italy)
Share Capital €21.050.000,00 i.v.
VAT N. and R.I. : (IT)00082630435
CCIAA Macerata, R.E.A. 40632