


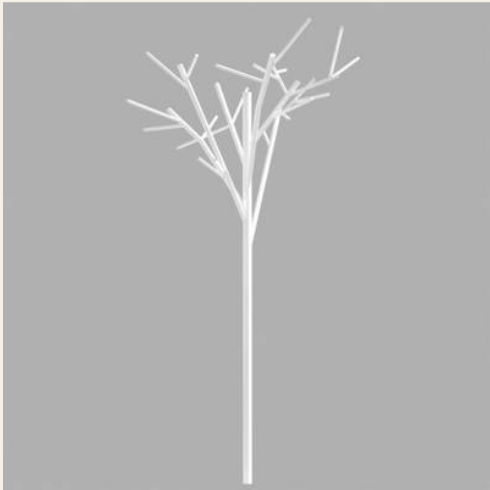

PART OF
ALBERO LED

SELECTED COLOUR

01 White

STANDARD

DESCRIPTION
System complete with pole for burial - Neutral White
- Symmetrical optic
SM - Symmetric
123 W system
2725.07 lm system
22.16 lm/W
4000 K
CRI 82

DESIGNED BY
Enzo Eusebi

Specification sheet generated on 25/08/2026


TECHNICAL DATA

LAST UPDATE: 31/07/2026

DESCRIPTION

Outdoor luminaire with down light symmetrical optic, designed to use LED lamps. System complete with pole for burial ø102mm with external grounding system. Maximum height 5500mm. Structure made of stainless steel with white powder paint surface treatment.
Door dimensions 220x45mm. Complete with circuit having Neutral White monochrome LEDs and optic with plastic lens. Electronic ballast (95-240V ac 50/60Hz), inserted inside the door. Replaceable control gear unit.
External bolts and screws made of A2 stainless steel.
The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

DIMENSIONS

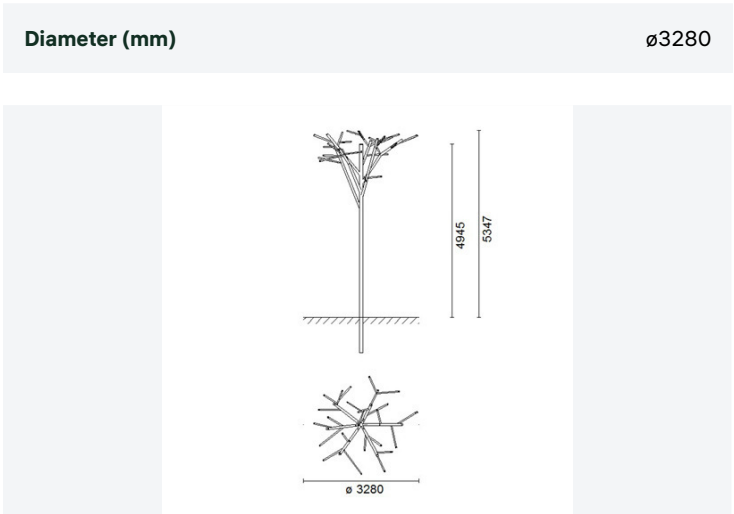

TECHNICAL PERFORMANCE

	Class I
	Completely protected against penetration of dust, Protected against jets of water
	IK08 - Protected against 5 J shocks

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)	224.75
Material	Stainless steel

PRODUCT CERTIFICATION


CE	EAC	UK CONFORMITY ASSESSED

PHOTOMETRIC DATA

DETAILS

Im system	2725.07
W system	123
Im source	3150
W source	99
Luminous efficiency - Im/W (system value)	22.16
Im in emergency mode	-
Maximum intensity (cd)	157
Total light flux at or above an angle of 90° (Lm)	56
Light output ratio (LOR)	87
Optic and beam angle	SM - Symmetric
Adjustability	fixed
Light colour quality	CRI 82
Colour temperature	4000 K
MacAdam Step	3
Lifetime LED 1	50000h - L80 - B10 (Ta 25°C)

CHARTS AND POLAR CURVES

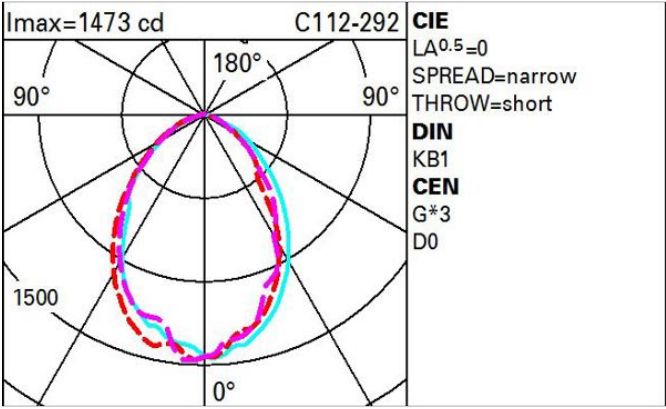

ELECTRICAL DATA

Operating ambient temperature range	from -20°C to +35°C.
Voltage	95-240 AC
ZVEI code	LED
Power Supply	Electronic Control gear included
Mounting options	Remote

INSTALLATION

DESCRIPTION

Pole-mounted

Mounting	Pole-top
Wiring	Complete with electronic ballast (95-240V ac 50/60Hz) to be wired using watertight connections at the time of installation inside the door.