


Aura

Aura Surface Mounted Polycarbonate Lens 900mA DALI Dimmable 3000K Ra80 Black
AURASP.0900DD.3080AA.2

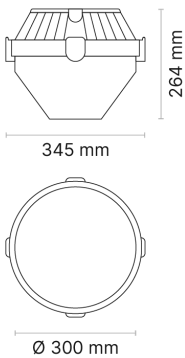

Optical

Optical Description	Low glare, wide spread refractor	Versalux LED Array Description	AURA, A-Type SMD LED, 3000K Ra80
Output (lm)	6200	Efficacy	159
Downward Output	5600	Upward Output	700
UWLR	700	Light Distribution Up %	11
Light Distribution Down %	89	CCT	3000K
CRI	80	L70	>102,000hrs
L80	>102,000hrs	L90	50,600hrs
TM-21 @ 50,000hr	90.83%	Beam Spread	145° x 145°
Horizontal Beam Angle	145.0	Vertical Beam Angle	145.0
IES Classification	Type V	Max Intensity	1330.0
Luminous Length (X)	295	Luminous Width (Y)	295
Luminous Height (Z)	160		

Physical

Finish Colour	Black	Finish Type	Powdercoat
Housing Material	Die-cast aluminium	Optic Material	Polycarbonate
Mounting Type	Surface mounted	Dimensions	Ø345mm x H264mm
IP Rating	65	IK Rating	10

Electrical

Watts	39	Rated Voltage	220-240VAC
Electrical Class	Class I	Driver Description	Integral driver set to 900mA
Driver Control	DALI Dimmable		