



STAR(Y) - DELTA(Δ) CONVERSION

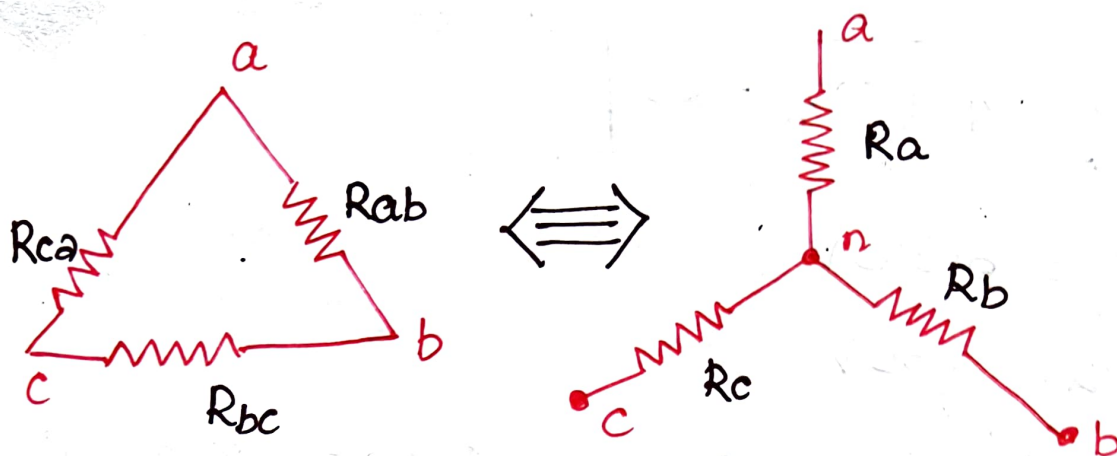

Δ - Y

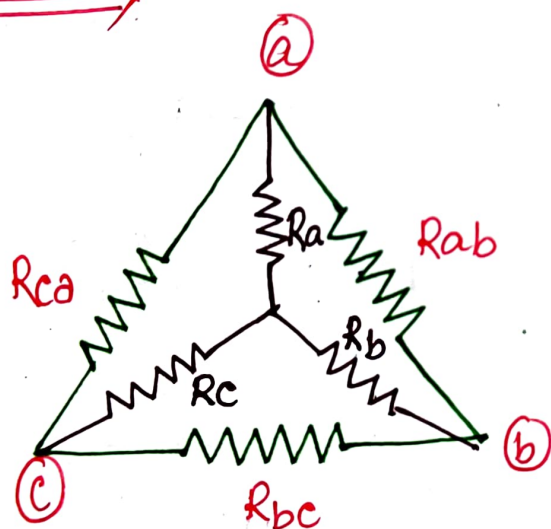

$$R_a = \frac{R_{ab} \cdot R_{ca}}{R_{ab} + R_{bc} + R_{ca}}$$

$$R_b = \frac{R_{ab} \cdot R_{bc}}{R_{ab} + R_{bc} + R_{ca}}$$

$$R_c = \frac{R_{ca} \cdot R_{cb}}{R_{ab} + R_{bc} + R_{ca}}$$

Y - Δ

$$R_{ab} = \frac{R_a R_b + R_b R_c + R_c R_a}{R_c}$$

$$R_{bc} = \frac{R_a R_b + R_b R_c + R_c R_a}{R_a}$$

$$R_{ca} = \frac{R_a R_b + R_b R_c + R_c R_a}{R_b}$$

$R_{\Delta} = 3R_Y$
↓
Balanced system.