



PART OF
LUN-UP EVO IN-GROUND

SELECTED COLOUR
☒ **04** Black ☐ STANDARD

DESCRIPTION
Ground and pavement recessed luminaire - Warm White LEDs - external power supply Vin=24V dc - Flood optic

F - Flood 32°
9.2 W system
934.4 lm system
101.57 lm/W
3000 K
CRI 82 - Rf (Colour Fidelity Index) 85 - Rg (Gamut Index) 96

DESIGNED BY
Dean Skira

Specification sheet generated on 25/08/2026

REQUIRED ACCESSORIES

SELECTED



X584

MOUNTING ACCESSORIES

Plastic casing for underfloor installation + + junction closing caps for continuous line

WEIGHT (KG) 1.3

☒ **04** Black

OPTIONAL COMPONENTS

SELECTED



X183

POWER SUPPLY

Constant voltage power supply unit non dimmable 80 W - VIN =90-305VAC 50/60Hz Vout = 24V IMAX = 3,4A dimensions:195,6x61,5x38,8

SIZE (MM) 195X61X38 -
WEIGHT (KG) 1.2

☐ **00** Indetermina...


TECHNICAL DATA

LAST UPDATE: 05/08/2026

DESCRIPTION

Ground and pavement recessed luminaire, designed to use monochrome LED lamps in Warm White with a Flood (F) optic. Ground and pavement recessed installation using the special outer casing. Consists of a body and outer casing to be ordered separately, in the shape of a 1/4 of a circle. Body made of a black, high-performance PPS (polyphenylene sulfide) thermoplastic material. The 8 mm thick tempered sodium-calcium closing glass with customised black serigraphy is silicone-sealed to a stainless steel plate with self-coupling inserts; the glass+plate unit is fastened to the body by stainless steel nuts with a silicone seal in the middle. Supplied with high definition "OptiBeam" reflectors made of metallic thermoplastic material with a Flood optic. Monochrome version with electronic circuit 24V dc, warm white LEDs, Dali dimmable using Dali ballast and interface to be ordered separately. The product's lower assembly comes complete with a PG9 in a plastic material, a multi-core cable L=350mm with anti-transpiration device . Connectors to be ordered separately. The product and outer casing are secured to one another by two A2 stainless steel captive screws. All screws used are made of A2 stainless steel.

DIMENSIONS

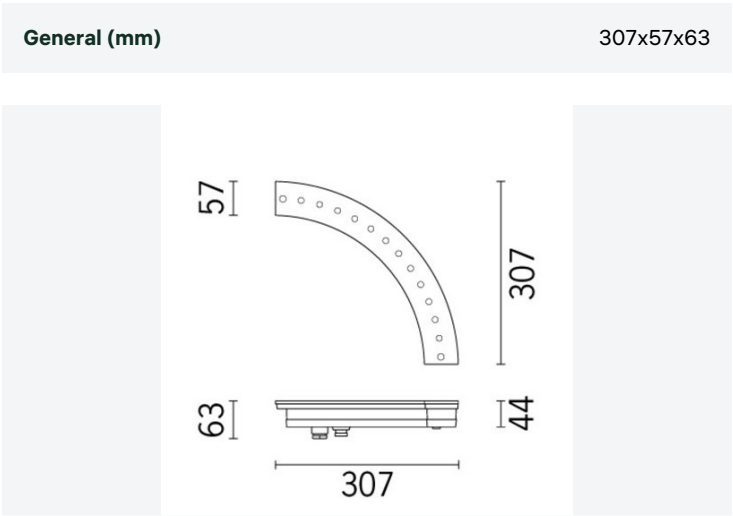

TECHNICAL PERFORMANCE

	Class III
	Completely protected against penetration of dust, Protected against the effects of immersion
	IK08 - Protected against 5 J shocks
	Static load resistance 1500kg

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)	1.15
Material	Glass and plastic

PRODUCT CERTIFICATION


BIS	CE	EAC	ENEC-03
RETILAP	UK CONFORMITY ASSESSED		

PHOTOMETRIC DATA

DETAILS

Im system	934.4
W system	9.2
Im source	1280
W source	7.8
Luminous efficiency - Im/W (system value)	101.57
Im in emergency mode	-
Maximum intensity (cd)	2980
Total light flux at or above an angle of 90° (Lm)	934
Light output ratio (LOR)	73
Optic and beam angle	F - Flood 32°
Adjustability	fixed
Light colour quality	CRI 82 - Rf (Colour Fidelity Index) 85 - Rg (Gamut Index) 96
Colour temperature	3000 K
MacAdam Step	3
Lifetime LED 1	>100,000h - L90 - B10 (Ta 25°C)

CHARTS AND POLAR CURVES

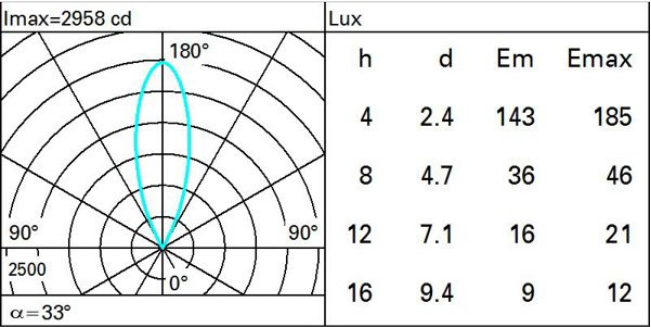

ELECTRICAL DATA

Operating ambient temperature range	from -30°C to 35°C.
Voltage	24 DC
ZVEI code	LED
Power Supply	Electronic Control gear not included
Mounting options	Remote
LED current (mA)	240

INSTALLATION

DESCRIPTION

Ground- and pavement-recessed, using the outer casing, to be ordered separately.

Mounting	Ground recessed
Wiring	Luminaire equipped with 24V dc electronic circuit and electronic ballast to be ordered separately.