



PART OF
IPro 51MM

SELECTED COLOUR

☐ 15 Grey

STANDARD

DESCRIPTION

Outdoor floodlight - Warm White LED - max
1050mA - Superspot optic with Cylinder

S - Spot 10°

3.2 W system

218 lm system

68.2 lm/W

3000 K

**CRI 83 - Rf (Colour Fidelity Index) 86 - Rg (Gamut
Index) 96**

DESIGNED BY

Mario Cucinella

Specification sheet generated on 25/08/2026

CURRENT

SELECTED

1050mA 218lm 3.2W

REQUIRED ACCESSORIES

SELECTED



B915

WIRING COMPONENTS

IP68 box for multiple connections - dim. 135x82x70h

**SIZE (MM) 135X82X70 -
WEIGHT (KG) 0.36**

■ **04 Black**

OPTIONAL COMPONENTS

SELECTED



X270

MOUNTING ACCESSORIES

Spike for ground / garden application

WEIGHT (KG) 0.18

☐ 00 Indetermina...


TECHNICAL DATA

LAST UPDATE: 05/08/2026

DESCRIPTION

Direct light outdoor floodlight, designed to use warm white LED lamps, with superspot optic and external cylinder for cleaning up the beam of light. Ground, wall or ceiling installation using special adjustable bracket. The luminaire consists of an optical assembly, rear cap, front cylinder and adjustable bracket. The optical assembly and rear cap are made of die-cast aluminium alloy coated with liquid acrylic paint (grey finish) or textured liquid (white finish) with a high level of resistance to weather and UV rays. Methacrylate front cylinder, painted black and joined to the optical assembly with silicone. The adjustable fixing bracket is made of painted aluminium. It has a single nickel-plated brass M14x1 cable gland and black rubber outlet cable complete with anti-transpiration device L=300mm, electronic circuit with warm white LED and optics having lenses made of thermoplastic material (methacrylate). The electronic ballast must be ordered separately (max. 1050mA). All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

DIMENSIONS

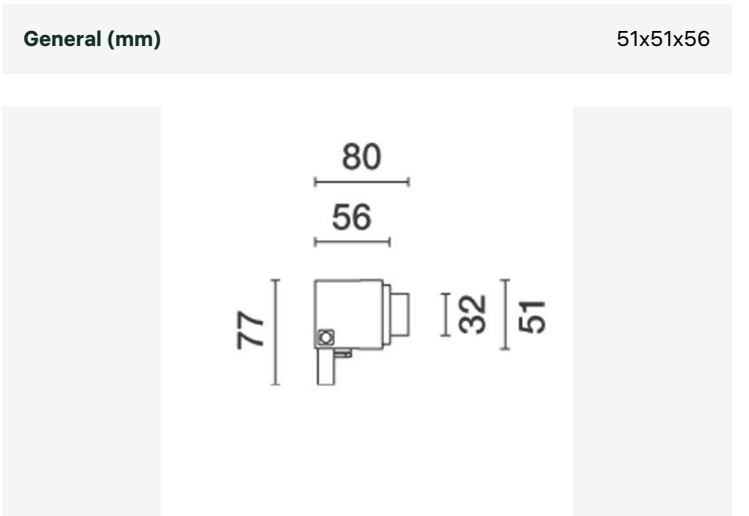

TECHNICAL PERFORMANCE

- 

Class III
- 

Completely protected against penetration of dust, Protected against waves
- 

IK05 - Protected against 0,7 J shocks

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)	0.26
Material	Aluminium

PRODUCT CERTIFICATION

- 

BIS
- 

CE
- 

EAC
- 

ENEC-03
- 

RETILAP
- 




UK
CONFORMITY
ASSESSED

PHOTOMETRIC DATA

DETAILS

Optic and beam angle	S - Spot 10°
Im system	218
W system	3.2
Im source	370
W source	3.2
Luminous efficiency - Im/W (system value)	68.2
Im in emergency mode	-
Maximum intensity (cd)	2142
Total light flux at or above an angle of 90° (Lm)	0
Light output ratio (LOR)	59
Optic and beam angle	S - Spot 10°
Adjustability	directional
Light colour quality	CRI 83 - Rf (Colour Fidelity Index) 86 - Rg (Gamut Index) 96
Colour temperature	3000 K
MacAdam Step	3
Lifetime LED 1	>100,000h - L80 - B10 (Ta 25°C)
Lifetime LED 2	74000h - L80 - B10 (Ta 40°C)

CHARTS AND POLAR CURVES

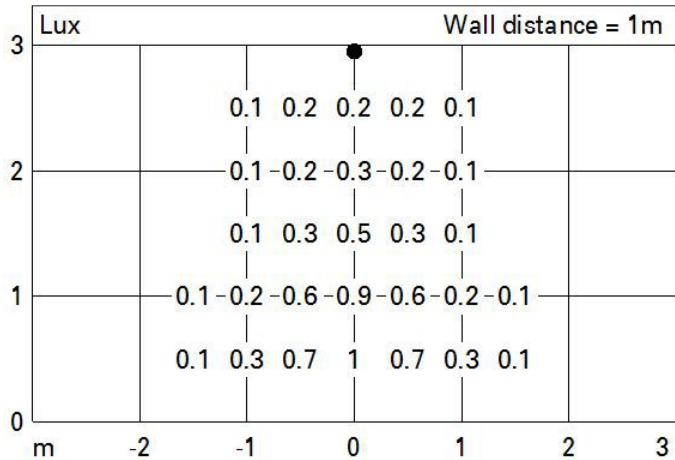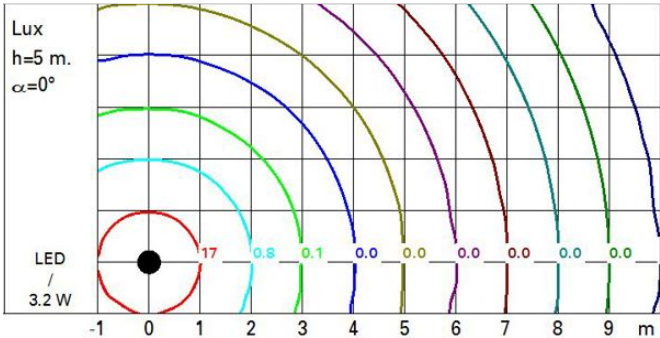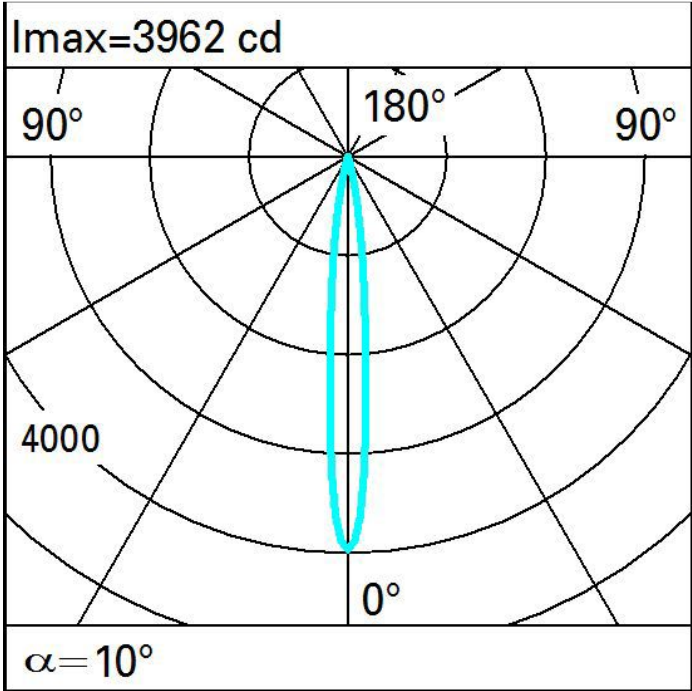

ELECTRICAL DATA

Operating ambient temperature range	from -20°C to +35°C.
ZVEI code	LED
Power Supply	Electronic Control gear not included
Mounting options	Remote
LED current (mA)	1050 / 500

INSTALLATION

DESCRIPTION

Ground, wall or ceiling installation using special bracket. Secure using screw anchors for concrete, cement and solid brick.

NOTES

Product complete with LED lamp.

Mounting	Free standing
Wiring	Electronic ballast to be ordered separately.