



PART OF
IPRO 81MM WALL MOUNTED

SELECTED COLOUR

01 White

STANDARD

DESCRIPTION
Outdoor wall-mounted luminaire - Warm white LED
- with electronic ballast Vin=100-240V ac - Flood optic
F - Flood 32°
7.7 W system
494.1 lm system
64.17 lm/W
3000 K
CRI 83 - Rf (Colour Fidelity Index) 86 - Rg (Gamut Index) 96

DESIGNED BY
Mario Cucinella

Specification sheet generated on 25/08/2026

TECHNICAL DATA

LAST UPDATE: 06/08/2026

DESCRIPTION

Direct light outdoor floodlight, designed to use warm white LED lamps, with flood optic. For wall-mounting with the special base. The luminaire consists of an optical assembly, upper cap and base for fixing to the wall. The optical assembly, upper cap and base are made of die-cast aluminium alloy coated with liquid acrylic paint (grey finish) or textured liquid (white finish) with a high level of resistance to weather and UV rays. Transparent tempered sodium - calcium safety glass with customised grey serigraphy, 4 mm thick, joined to the optical assembly with silicone. Adjustable fixing bracket made of painted aluminium; with a double nickel-plated brass PG11 cable gland, suitable for power cables ø 6.5-11 mm. For electrical connection the product has a plastic box with three 2-pin quick-coupling terminals for cables with max. cross-section 4 mm². Electronic circuit with warm white LED, optics with lens made of thermoplastic material (methacrylate) and a black polycarbonate multi-groove ring for visual comfort. Equipped with electronic ballast Vin=100-240V ac 50/60Hz. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

TECHNICAL PERFORMANCE


	Class II
IP66	Completely protected against penetration of dust, Protected against waves
IK07	IK07 - Protected against 2 J shocks

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)	0.92
Material	Aluminium

DIMENSIONS

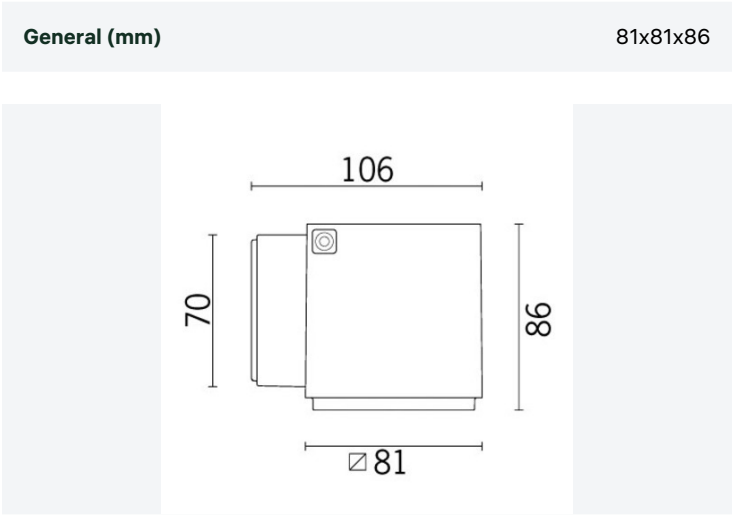

PRODUCT CERTIFICATION


 BIS	 BVB BYGGVARUBE- DÖMNINGEN	 CE	 EAC
 ENEC-03	 RETILAP	 TISI - THAI INDUSTRIAL STANDARD INSTITUTE	

PHOTOMETRIC DATA

DETAILS

Im system	494.1
W system	7.7
Im source	810
W source	6.2
Luminous efficiency - Im/W (system value)	64.17
Im in emergency mode	-
Maximum intensity (cd)	1442
Total light flux at or above an angle of 90° (Lm)	0
Light output ratio (LOR)	61
Optic and beam angle	F - Flood 32°
Adjustability	fixed
Light colour quality	CRI 83 - Rf (Colour Fidelity Index) 86 - Rg (Gamut Index) 96
Colour temperature	3000 K
MacAdam Step	3
Lifetime LED 1	>100,000h - L80 - B10 (Ta 25°C)
Lifetime LED 2	>100,000h - L80 - B10 (Ta 40°C)

CHARTS AND POLAR CURVES

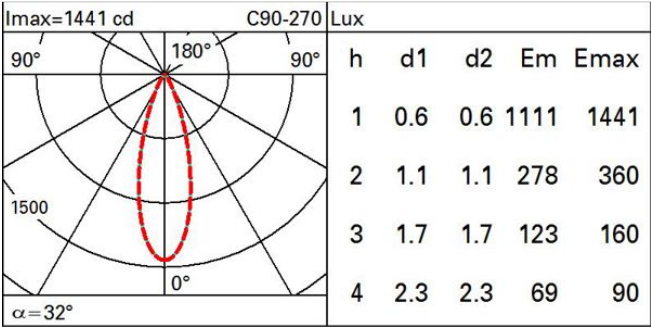

ELECTRICAL DATA

Operating ambient temperature range	from -30°C to 50°C.
Power factor	See installation instructions
Overvoltage protection	2kV Common mode & 1kV Differential mode
ZVEI code	LED
Power Supply	Electronic Control gear included
Mounting options	Integral

INSTALLATION

DESCRIPTION

For wall-mounting with the special aluminium base. Secure using screw anchors for concrete, cement and solid brick. Product can be installed with the light beam in any direction (up, down, right, left, slanting, etc.).

NOTES

Product complete with LED lamp.

Mounting	Surface mounted, Wall surface
Wiring	Equipped with electronic ballast Vin=100-240V ac 50/60Hz. Polyamide PG11 double cable gland for pass-through wiring, suitable for power cables ø 6.5-11 mm.