


Compact

Versatile compact linear systems for general lighting applications


Product Code: CMP-017-RES-STD-W2790-1500-C-ANO

Compact Linear systems are based on a series of extremely compact profiles, which when combined with Digilin’s broad range of LED options, creates an ultra-versatile linear lighting system for tight spaces.

All Digilin linear systems are manufactured in Australia to custom project lengths and supplied with factory-fitted connectors using Digilin’s chemical anchoring process for super durability and ease of installation. The system can undergo Digilin’s shield exterior coating service to upgrade its protection to an IP65 rating for outdoor applications.

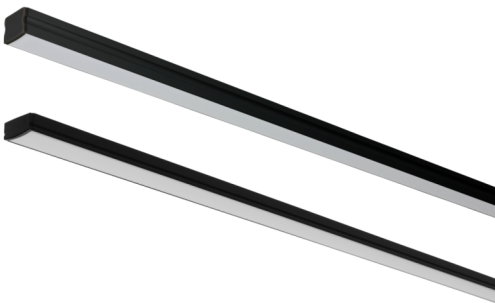

LED Colour	White
CCT/Wavelength	2700K
LED Lumens	1470lm/m
Power	10.8W/m
Input Current	450mA/m
Input Voltage	24VDC
Typical CRI	90+
LED Performance	L80 (10k) >60,000hrs
LED Configuration	Single 1500lm LED
LED Module Increment	41.67mm
LED Spacing	5.95mm
Maximum Continuous Run	11.5m (Single Feed), 23m (Dual Feed)
Mounting	Recessed with Spring Clips
Body Type	Standard Body
Beam Option	Clear Cover
Finish Colour	Natural Anodised Aluminium
Control	Mains/Phase, DALI, Smooth DALI, DMX, Bluetooth, Non-Dim
Driver Placement	Remote
Build Material	Extruded Aluminium
Luminaire IP Rating	IP20
LED Module IP Rating	IP20 (IP44 & IP65 available)
Dimensions - Shallow Body	17.1mm (width), 23.1mm (recessed flange width), 8.8mm (height)
Dimensions - Standard Body	17.1mm (width), 23.1mm (recessed flange width), 15.4mm (height)
Dimensions - Standard Body, Recessed with Spring Clips	17.1mm (width), 25mm (recessed flange width), 19.5mm (height)



Specifications are subject to change without notice