


Corner

Corner systems for coves, cabinetry & backlighting


Product Code: CNR-030-SFC-B475-0200-O-WHT

Specially designed for cove and backlighting applications, Cove linear systems use compact, surface mount profiles with curved or squared diffusers to output light in a 90-degree range. Opal diffusers create a dot-free finish and are recommended for direct-view applications, while clear and frosted diffusers enable higher efficiency light delivery for situations where the fixtures will not be directly seen.

All Digilin linear systems are manufactured in Australia to custom project lengths and supplied with factory-fitted connectors using Digilin’s chemical anchoring process for super durability and ease of installation. The system can undergo Digilin’s shield exterior coating service to upgrade its protection to an IP65 rating for outdoor applications.

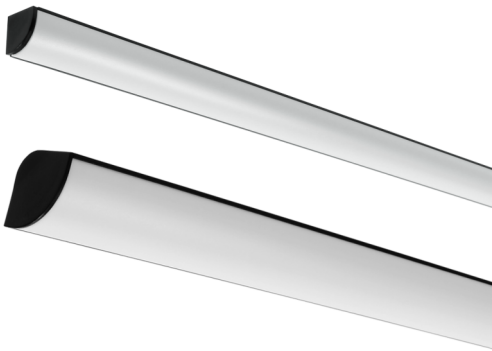

LED Colour	Blue
CCT/Wavelength	460nm
LED Lumens	240lm/m
Power	8.6W/m
Input Current	360mA/m
Input Voltage	24VDC
Typical CRI	N/A
LED Configuration	Single Blue 200lm LED
LED Module Increment	38.5mm
LED Spacing	6.4mm
Maximum Continuous Run	4m (Single Feed), 8mm (Dual Feed)
Body Width	30mm
Mounting	Surface Mount
Beam Option	Opal Diffuser
Finish Colour	White
Control	Mains/Phase, DALI, Smooth DALI, DMX, Non-Dim
Driver Placement	Remote
Build Material	Extruded Aluminium
Luminaire IP Rating	IP20
LED Module IP Rating	IP20 (IP44 & IP65 available)
Dimensions	16mm version: 16mm (width), 16mm (height) / 30mm version: 30mm (width), 30mm (height)

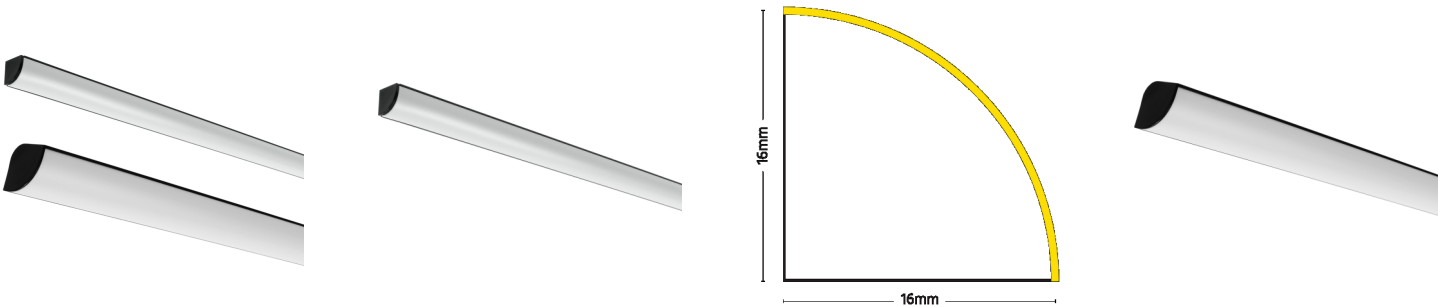

Specifications are subject to change without notice