
LED

IP44

IK07

IK10

IES


GENERAL INFORMATION

All-round wall/ceiling luminaire in ISCC-certified plastic based on renewable raw materials. IP44 and IK07 with a space-creating light pattern for stairwells, corridors, kitchens, bathrooms and cellars.

Design

Body and diffuser in opal polycarbonate

Protection: IP44, IK07

Surface or recessed mounting (recess kit ordered separately)

Anti-ligature and outdoor protective casings available (accessories) to IK10, IP55

Optics

Direct diffuse distribution for comfortable ambient light and good vertical illumination

Controls

Fixed-output or DALI/phase-pulse variants per code

Sensor options:

e-Sense BrightSwitch(PIR) presence on/off; absence dim high/low on request

e-Sense Detect(microwave) presence on/off via relay or high/low; high/low/off via DALI

Organic Response(PIR) presence/daylight; master/secondary via IR

CLO (Constant Light Output) available within the range

Installation

Four securing holes; ceiling or wall, surface or recessed

Do not cover with insulation

230VAC integral driver; snap-in terminal block 5x2.5mm²



1-phase through-wiring possible; rear cable entry or via knockouts; through-wiring at 0° or 180°

Additional Information

Emergency: Please speak to your customer representative

Accessories: anti-ligature casing, outdoor casing, mounting plate, strain relief, recess rings (IP44)

TECHNICAL INFORMATION

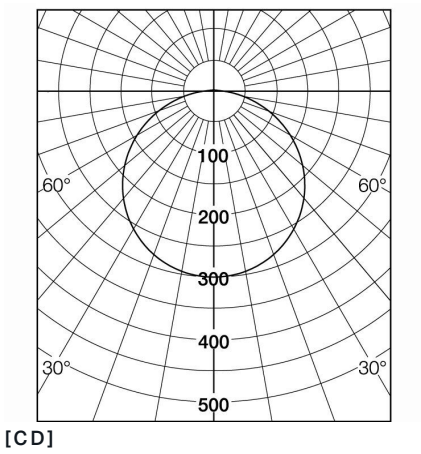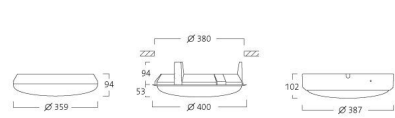

[CD]

