


ELLE Suspended - Beta Opti



EL-ELLP-1811-244

ELLE SUSPENDED BETA OPTI Suspended/Pendant Continuous Luminaire Direct
1600lm 10.8W LED Wide beam 4000K/ Ra90+ 240V Beta-Opti Louvre DALI Class I
L:1262mm W:65mm H:65mm IP20 Grey Matt .

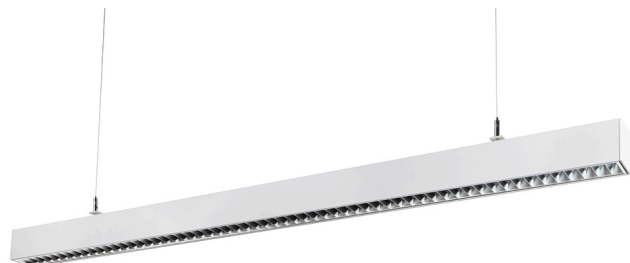

LED



COI
Compliant



IES

UGR
19



DESIGNED
TESTED
MANUFACTURED

TECHNICAL OVERVIEW

FINISH

Grey Matt

L = LENGTH [mm]

1262

W = WIDTH/DIAMETER [mm]

65

H = HEIGHT [mm]

65

CL = RECESSING LENGTH [mm]

-


CW = RECESSING

WIDTH/DIAMETER [mm]


-

WEIGHT [KG]

2.5



NOMINAL POLAR CURVE -
DIRECT/INDIRECT



NOMINAL POLAR CURVE -
DIRECT

PHOTOMETRIC VALUES

CONTROL TYPE

DALI

CEILING TYPE/MOUNTING

Suspended/Pendant

WATTAGE [W]

10.8

CLO ENABLED

Yes

FINAL WATTAGE CLO [W]

12

SYSTEM LUMENS [lm]

1600

LUMINAIRE LUMENS [lm]

1191

EFFICACY [lm/W]

LIGHTING TYPE

Direct

TARGET SPACING [m]

1.25m x 2.4m

TARGET H ILLUMINANCE [LUX]

330

LPD [W/m²]

3.73

NPD [W/SQM/100LUX]

1.05

BEAMWIDTH (FWHM)

-

OPTICS TYPE

Beta-Opti Louvre

UGR

COLOUR QUALITY

CCT [K]
4000K
CCT1 [K]
4000K
CCT2 [K]
-
OTHER LIGHT COLOUR
-
CRI
Ra90+
COI COMPLIANCE
Compliant
CLA 2.0
-
M-DER
-

LIFETIME AND MISCELLANEOUS PARAMETERS

LM80 TEST DURATION [HRS]
-
L90B50 LIFETIME [HRS]
-
TM21 L70 REPORTED LIFETIME [HRS]
-

ACCESSORIES

R9
70
MELANOPIC RATIO
0.7
CIRCADIAN STIMULUS CS [%]
12
CIRCADIAN LIGHT [LUX]
89
TM-30 RF
91
TM-30 RG
100
M-EDI
-

L100B50 LIFETIME (CLO) [HRS]
50000
TM21 L90 REPORTED LIFETIME [HRS]
-
SDCM INITIAL
-

ELLE ORGANIC RESPONSE MODULES



ELLE SURFACE MOUNTED / PENDANT ORT MODULES

EL-ELLA-1009-974	ELLE ORT MODULE SM/Pendant Beta L:200mm IP20 White Matt Continuous 2 Way. Connects DALI In Both Direction
EL-ELLA-1010-974	ELLE ORT MODULE SM/Pendant Beta L:200mm IP20 Black Matt Continuous 2 Way. Connects DALI In Both Direction
EL-ELLA-1011-974	ELLE ORT MODULE SM/Pendant Beta L:200mm IP20 Grey Matt Continuous 2 Way. Connects DALI In Both Direction
EL-ELLA-1012-974	ELLE ORT MODULE SM/Pendant Beta L:200mm IP20 White Matt Continuous Right. Connects DALI In Right Direction
EL-ELLA-1013-974	ELLE ORT MODULE SM/Pendant Beta L:200mm IP20 Black Matt Continuous Right. Connects DALI In Right Direction
EL-ELLA-1014-974	ELLE ORT MODULE SM/Pendant Beta L:200mm IP20 Grey Matt Continuous Right. Connects DALI In Right Direction
EL-ELLA-1015-974	ELLE ORT MODULE SM/Pendant Beta L:200mm IP20 White Matt Continuous Left. Connects DALI In Left Direction
EL-ELLA-1016-974	ELLE ORT MODULE SM/Pendant Beta L:200mm IP20 Black Matt Continuous Left. Connects DALI In Left Direction
EL-ELLA-1017-974	ELLE ORT MODULE SM/Pendant Beta L:200mm IP20 Grey Matt Continuous Left. Connects DALI In Left Direction
EL-ELLA-1021-974	ELLE ORT MODULE Extender SM/Pendant Beta L:200mm IP20 White Matt
EL-ELLA-1022-974	ELLE ORT MODULE Extender SM/Pendant Beta L:200mm IP20 Grey Matt
EL-ELLA-1023-974	ELLE ORT MODULE Extender SM/Pendant Beta L:200mm IP20 Black Matt
	<i>Note: Each ORT module is for use with up to 4 ELLE DALI sections in continuous installation.</i>



ELLE SUSPENSION ACCESSORIES

CEILING CUPS WHITE

CODE	DESCRIPTION
EL-ACC-1224-000	Elle Suspension Bracket including wire lock; 1 Black pair.
EL-ACC-1223-000	Elle Suspension Bracket including wire lock; 1 White pair.
EL-ACC-1225-000	Elle Suspension Bracket including wire lock; 1 Grey pair.
EL-ACC-543-000	Suspension, large round White ceiling cup with transparent mains wire and stainless wire, 1.5m
EL-ACC-544-000	Suspension, small round White ceiling cup with stainless wire, 1.5m
EL-ACC-541-000	Suspension, large round Black ceiling cup with transparent mains wire and stainless wire, 1.5m
EL-ACC-542-000	Suspension, small round Black ceiling cup with stainless wire, 1.5m

ELLE EMERGENCY MODULES	 <i>ELLE Surface Mounted / Pendant EMG Module</i>	
	<u>EL-ELLA-1800-800</u>	ELLE EMG MODULE SM/Pendant Opal/Delta/Beta Maintained, Non-Monitored Class I L:600mm IP20 White Matt
	<u>EL-ELLA-1800-801</u>	ELLE EMG MODULE SM/Pendant Opal/Delta/Beta DALI Maintained, DALI-Monitored Class I L:600mm IP20 White Matt
	<u>EL-ELLA-1801-800</u>	ELLE EMG MODULE SM/Pendant Opal/Delta/Beta Maintained, Non-Monitored Class I L:600mm IP20 Black Matt
	<u>EL-ELLA-1801-801</u>	ELLE EMG MODULE SM/Pendant Opal/Delta/Beta DALI Maintained, DALI-Monitored Class I L:600mm IP20 Black Matt
	<u>EL-ELLA-1802-800</u>	ELLE EMG MODULE SM/Pendant Opal/Delta/Beta Maintained, Non-Monitored Class I L:600mm IP20 Grey Matt
	<u>EL-ELLA-1802-801</u>	ELLE EMG MODULE SM/Pendant Opal/Delta/Beta DALI Maintained, DALI-Monitored Class I L:600mm IP20 Grey Mat



ELLE SPACERS

ELLE SUSPENDED SPACER

<u>EL-ELLP-1412-244</u>	ELLE Spacer Suspended Beta / L:400mm IP20 White Matt
<u>EL-ELLP-1413-244</u>	ELLE Spacer Suspended Beta / L:400mm IP20 Black Matt
<u>EL-ELLP-1414-244</u>	ELLE Spacer Suspended Beta / L:400mm IP20 Grey Matt
<u>EL-ELLP-1415-244</u>	ELLE Spacer Suspended Beta / L:600mm IP20 White Matt
<u>EL-ELLP-1416-244</u>	ELLE Spacer Suspended Beta / L:600mm IP20 Black Matt
<u>EL-ELLP-1417-244</u>	ELLE Spacer Suspended Beta / L:600mm IP20 Grey Matt
<u>EL-ELLP-1418-244</u>	ELLE Spacer Suspended Beta / L:800mm IP20 White Matt
<u>EL-ELLP-1419-244</u>	ELLE Spacer Suspended Beta / L:800mm IP20 Black Matt
<u>EL-ELLP-1420-244</u>	ELLE Spacer Suspended Beta / L:800mm IP20 Grey Matt
<u>EL-ELLP-1421-244</u>	ELLE Spacer Suspended Beta / L:1200mm IP20 White Matt
<u>EL-ELLP-1422-244</u>	ELLE Spacer Suspended Beta / L:1200mm IP20 Black Matt
<u>EL-ELLP-1423-244</u>	ELLE Spacer Suspended Beta / L:1200mm IP20 Grey Matt

Product Advisement Statement

- All photometric (including flicker metrics), spectrometric, electrical, and thermal data have a tolerance of $\pm 5\%$.
- The value indicated by the UGR icon refers to the lowest UGR value achievable by at least one standard variant of a given product family. It may not necessarily apply to all standard variants.

- The Unified Glare Rating (UGR) is a function of the entire design space, including but not limited to the optical properties of the ceiling and walls, as well as the properties and spacing of all other luminaires in the calculation space. It is not an intrinsic property of a light fitting and should not be quoted as such.

- All UGR values stated by Eagle Lighting are calculated in compliance with AS/NZS 1680.1-2006 (aligned with CIE 117-1995) and are achievable with standard room sizes and luminaire spacing based on the specific luminaire model.

- The following design parameters apply unless otherwise specified:

- Light Loss Factor (LLF): 0.80 (Nominal)
- Room Reflectance Values (Ceiling/Walls/Floor): 0.70/0.50/0.20
- Ceiling Height: 2.7m
- Horizontal Illuminance (Eh) calculated at 0.72m above finished floor level (AFFL)

- Non-standard (custom) products may have UGR values higher than those of standard models, depending on the nature of the customization. Please consult your sales representative for details.

- UGR values obtained under conditions or parameters other than those specified above may differ from the stated values.

- All product heights are shown excluding the driver unless otherwise specified.

- For questions about our products or assistance with ordering accessories (where applicable), please contact your customer service representative.

