

ELLE Recessed - Delta

EL-ELLR-1036-974




ELLE RECESSED DELTA Plaster/Sandwich panel End Luminaire Bottom Access
Direct 950lm 7.2W LED Wide beam 4000K/ Ra90+ 240V Delta diffuser Organic
Response Class I L:688mm W:91mm H:105mm IP20 Mannex white .



TECHNICAL OVERVIEW

FINISH
Mannex white
L = LENGTH [mm]
688
W = WIDTH/DIAMETER [mm]
91
H = HEIGHT [mm]
105
CL = RECESSING LENGTH [mm]
-
CW = RECESSING WIDTH/DIAMETER [mm]
80
WEIGHT [KG]
2.8

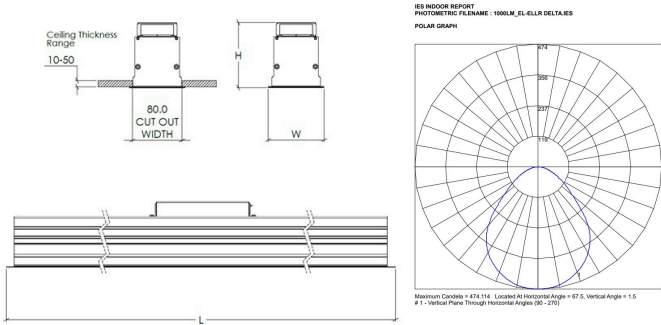

NORMALISED POLAR CURVE

PHOTOMETRIC VALUES

CONTROL TYPE
Organic Response
CEILING TYPE/MOUNTING
Plaster/Sandwich panel
WATTAGE [W]
7.2
CLO ENABLED
Yes
FINAL WATTAGE CLO [W]
8

LIGHTING TYPE
Direct
TARGET SPACING [m]
-
TARGET H ILLUMINANCE [LUX]
-
LPD [W/m ²]
-
NPD [W/SQM/100LUX]
-

SYSTEM LUMENS [lm]
950
LUMINAIRE LUMENS [lm]
556
EFFICACY [lm/W]
77

BEAMWIDTH (FWHM)
-
OPTICS TYPE
Delta diffuser
UGR
-

COLOUR QUALITY

CCT [K]
4000K
CCT1 [K]
4000K
CCT2 [K]
-
OTHER LIGHT COLOUR
-
CRI
Ra90+
COI COMPLIANCE
Compliant
CLA 2.0
-
M-DER
-


R9
76
MELANOPIC RATIO
0.7
CIRCADIAN STIMULUS CS [%]
18
CIRCADIAN LIGHT [LUX]
131
TM-30 RF
91
TM-30 RG
100
M-EDI
-

LIFETIME AND MISCELLANEOUS PARAMETERS

LM80 TEST DURATION [HRS]
12000
L90B50 LIFETIME [HRS]
-
TM21 L70 REPORTED LIFETIME [HRS]
-

L100B50 LIFETIME (CLO) [HRS]
50000
TM21 L90 REPORTED LIFETIME [HRS]
-
SDCM INITIAL
3

ACCESSORIES

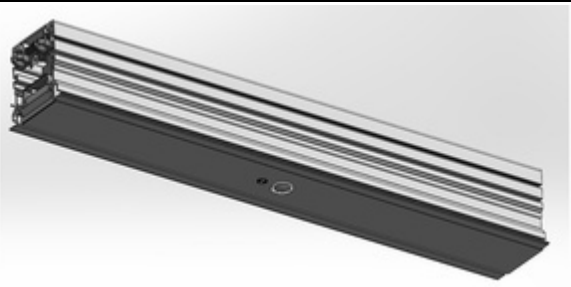ELLE ORT MODULES	 <i>ELLE Recessed ORT Module</i>
EL-ELLA-1024-974	L=200mm. 2 Way ORT Module White Mannex. Connects DALI In Both Directions
EL-ELLA-1025-974	L=200mm. Right ORT Module White Mannex. Connects DALI In Right Direction (Toward End) and Breaks DALI to the Left (Toward Start)
EL-ELLA-1026-974	L=200mm. Left ORT Module White Mannex. Connects DALI In Left Direction (Toward Start) and Breaks DALI to the Right (Toward End)
EL-ELLA-1027-974	L=200mm. ORT Signal Extender Module White Mannex. Does not connect DALI In any Direction
	<i>Note: Each ORT module is for use with up to 4 ELLE DALI sections in continuous installation.</i>
ELLE EMERGENCY MODULES	 <i>ELLE Recessed EMG Module</i>
EL-ELLA-1806-800	ELLE EMG MODULE Recessed Opal/Delta/Beta Maintained, Non-Monitored Class I L:600mm IP20 White Matt
EL-ELLA-1806-801	ELLE EMG MODULE Recessed Opal/Delta/Beta DALI Maintained, DALI-Monitored Class I L:600mm IP20 White Matt

- All photometric (including flicker metrics), spectrometric, electrical, and thermal data have a tolerance of $\pm 5\%$.
- The value indicated by the UGR icon refers to the lowest UGR value achievable by at least one standard variant of a given product family. It may not necessarily apply to all standard variants.
- The Unified Glare Rating (UGR) is a function of the entire design space, including but not limited to the optical properties of the ceiling and walls, as well as the properties and spacing of all other luminaires in the calculation space. It is not an intrinsic property of a light fitting and should not be quoted as such.
- All UGR values stated by Eagle Lighting are calculated in compliance with AS/NZS 1680.1-2006 (aligned with CIE 117-1995) and are achievable with standard room sizes and luminaire spacing based on the specific luminaire model.
- The following design parameters apply unless otherwise specified:
 - Light Loss Factor (LLF): 0.80 (Nominal)
 - Room Reflectance Values (Ceiling/Walls/Floor): 0.70/0.50/0.20
 - Ceiling Height: 2.7m
 - Horizontal Illuminance (Eh) calculated at 0.72m above finished floor level (AFFL)
- Non-standard (custom) products may have UGR values higher than those of standard models, depending on the nature of the customization. Please consult your sales representative for details.
- UGR values obtained under conditions or parameters other than those specified above may differ from the stated values.
- All product heights are shown excluding the driver unless otherwise specified.
- For questions about our products or assistance with ordering accessories (where applicable), please contact your customer service representative.

