


OmniPOD Pendant (New)

EL-OMNP-3004-244



OMNIPOD PENDANT Suspended/Pendant Single Luminaire Direct/Indirect 22.8W
LED Wide beam 4000K/4000K Ra90+ 240V Hybrid Optics DALI-2 Class I
L:1203mm W:158mm H:70mm IP40 Mannex white.



TECHNICAL OVERVIEW

FINISH

Mannex white

L = LENGTH [mm]

1203

W = WIDTH/DIAMETER [mm]

158

H = HEIGHT [mm]

70

CL = RECESSING LENGTH [mm]



-

CW = RECESSING WIDTH/DIAMETER [mm]


-

WEIGHT [KG]

6

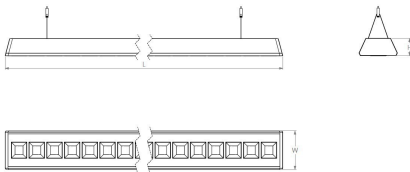

NORMALISED POLAR CURVE
(DIRECT)



NORMALISED POLAR CURVE
(DIRECT/INDIRECT)

PHOTOMETRIC VALUES

CONTROL TYPE

DALI-2

CEILING TYPE/MOUNTING

Suspended/Pendant

WATTAGE [W]

22.8

CLO ENABLED

Yes

FINAL WATTAGE CLO [W]

25

SYSTEM LUMENS [lm]

-

LUMINAIRE LUMENS [lm]

LIGHTING TYPE

Direct/Indirect

TARGET SPACING [m]

-

TARGET H ILLUMINANCE [LUX]

-

LPD [W/m²]

-

NPD [W/SQM/100LUX]

-

BEAMWIDTH (FWHM)

-

OPTICS TYPE

3214
EFFICACY [lm/W]
141

COLOUR QUALITY

CCT [K]
4000K
CCT1 [K]
4000K
CCT2 [K]
4000K
OTHER LIGHT COLOUR
-
CRI
Ra90+
COI COMPLIANCE
Compliant
CLA 2.0
-
M-DER
-

LIFETIME AND MISCELLANEOUS PARAMETERS

LM80 TEST DURATION [HRS]
20000
L90B50 LIFETIME [HRS]
-
TM21 L70 REPORTED LIFETIME [HRS]
-

ACCESSORIES

CODE	DESCRIPTION
EL-ACC-180-000	Casambi Wireless User Interface (Battery powered. 4 scenes. Available in White or Black)
EL-ACC-181-000	DALI Touch Panel Basic TW (Capacitive DALI touch panel with real glass display)
EL-ACC-182-000	DALI x/e-touchPANEL 02 (Touch-screen based DALI lighting and emergency lighting management system)
EL-ACC-183-000	Tridonic DALI XC (DALI input controller)

Product Advisement Statement

- All photometric (including flicker metrics), spectrometric, electrical, and thermal data have a tolerance of ±5%.
- The value indicated by the UGR icon refers to the lowest UGR value achievable by at least one standard variant of a given product family. It may not necessarily apply to all standard variants.
- The Unified Glare Rating (UGR) is a function of the entire design space, including but not limited to the optical properties of the ceiling and walls, as well as the properties and spacing of all other luminaires in the calculation space. It is not an intrinsic property of a light fitting and should not be quoted as such.
- All UGR values stated by Eagle Lighting are calculated in compliance with AS/NZS 1680.1-2006 (aligned with CIE 117-1995) and are achievable with standard room sizes and luminaire spacing based on the specific luminaire model.
- The following design parameters apply unless otherwise specified:
 - Light Loss Factor (LLF): 0.80 (Nominal)
 - Room Reflectance Values (Ceiling/Walls/Floor): 0.70/0.50/0.20
 - Ceiling Height: 2.7m
 - Horizontal Illuminance (Eh) calculated at 0.72m above finished floor level (AFFL)
- Non-standard (custom) products may have UGR values higher than those of standard models, depending on the nature of the customization. Please consult your sales representative for details.
- UGR values obtained under conditions or parameters other than those specified above may differ from the stated values.
- All product heights are shown excluding the driver unless otherwise specified.

Hybrid Optics
UGR
-
R9
50
MELANOPIC RATIO
0.69
CIRCADIAN STIMULUS CS [%]
-
CIRCADIAN LIGHT [LUX]
-
TM-30 RF
89
TM-30 RG
97
M-EDI
-

L100B50 LIFETIME (CLO) [HRS]
50000
TM21 L90 REPORTED LIFETIME [HRS]
-
SDCM INITIAL
3

• For questions about our products or assistance with ordering accessories (where applicable), please contact your customer service representative.

