

Pleiad G4 125

FG-73013-0



PLEIAD G4 125 Recessed Single Luminaire Direct 1045lm 10W LED Wide beam
3000K Ra90+ Matt reflector Non-dim Class III Std AUS flex & plug 2.0m W:143mm
H:98mm IP64 White . Supplied as: EL-73013.0-0,EL-99473-0



LED



IES

RE VIT



DESIGNED
TESTED
MANUFACTURED

TECHNICAL OVERVIEW

FINISH

White

L = LENGTH [mm]

-

W = WIDTH/DIAMETER [mm]

143

H = HEIGHT [mm]

98

CL = RECESSING LENGTH [mm]

-



CW = RECESSING

WIDTH/DIAMETER [mm]

125

WEIGHT [KG]

0.3

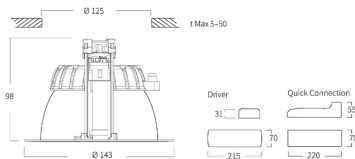

NOMINAL POLAR CURVE

PHOTOMETRIC VALUES

CONTROL TYPE

Non-dim

CEILING TYPE/MOUNTING

Recessed

WATTAGE [W]

10

CLO ENABLED

No

FINAL WATTAGE CLO [W]

10

SYSTEM LUMENS [lm]

-

LUMINAIRE LUMENS [lm]

1045

EFFICACY [lm/W]

105

LIGHTING TYPE

Direct

TARGET SPACING [m]

-

TARGET H ILLUMINANCE [LUX]

-

LPD [W/m²]

-

NPD [W/SQM/100LUX]

-

BEAMWIDTH (FWHM)

-

OPTICS TYPE

Matt reflector

UGR

-

COLOUR QUALITY

CCT [K]

3000K

R9

64

CCT1 [K]
3000K
CCT2 [K]
-
OTHER LIGHT COLOUR
-
CRI
Ra90+
COI COMPLIANCE
Non-Compliant
CLA 2.0
-
M-DER
-

MELANOPIC RATIO
0.56
CIRCADIAN STIMULUS CS [%]
20
CIRCADIAN LIGHT [LUX]
154
TM-30 RF
90
TM-30 RG
96
M-EDI
-

LIFETIME AND MISCELLANEOUS PARAMETERS

LM80 TEST DURATION [HRS]
10080
L90B50 LIFETIME [HRS]
-
TM21 L70 REPORTED LIFETIME [HRS]
>55400

L100B50 LIFETIME (CLO) [HRS]
-
TM21 L90 REPORTED LIFETIME [HRS]
>55400
SDCM INITIAL
3

ACCESSORIES

	Name	Description	Article number
	Trimless	Ø125, white	41062
	Sloping ceiling cylinder	Sloping ceiling cylinder Ø125	41083
	Retrofit kit	Retrofit kit Ø125-220 mm	41137
No image	Mounting plate	Mounting plate HB. Adapted for downlights with recess dimensions Ø 125	41065
No image	Mounting plate	Mounting plate Ø125	41681
	Cover plate clear IP 64	Ø125 mm, black (RAL 9005 G10)	41159
	Cover plate clear IP 64	Ø125 mm, grey (RAL 9006)	41136
	Cover plate clear IP 64	Ø125 mm, white (RAL 9016)	41135
	Cover plate Delta IP 20	Ø125 mm, black (RAL 9005 G10)	41153
	Cover plate Delta IP 20	Ø125 mm, grey (RAL 7040)	41132
	Cover plate Delta IP	20 Ø 125 mm, white (RAL 9016)	41131
	Cover plate IP 21	Cover plate IP 21, Ø125	41059
	Cover plate opal IP 54	Ø 125 mm, black (RAL 9005 G10)	41156

	Cover plate opal IP 54	Ø 125 mm, grey (RAL 7040)	41134
	Cover plate opal IP 54	Ø 125 mm, white (RAL 9016)	41133
	Edge ring II	Ø 125 mm, black (RAL 9005 G10), height 11 mm, external diameter 155 mm.	41138
	Edge ring III	Ø 125 mm, black (RAL 9005 G10), height 9 mm, external diameter 155 mm.	41141
No image	Mounting plate	Mounting plate HB. Adapted for downlights with recess dimensions Ø 125	41065
No image	Mounting plate	Mounting plate Ø125	41681

