

HaloFlex


Flexible IP68 systems for exterior and curved architectural applications

Product Code: HFL-FL-W3590-0500

HaloFlex is a flexible, durable IP68 linear system designed for high-exposure exterior and curved architectural applications. This unique system is available in front-lit (vertical bending) and side-lit (horizontal bending) formats and can be configured in multiple wattages as fixed white, fixed colour, tuneable white, RGB, RGBW and pixel DMX versions. Although suitable for exterior use, increasingly we’re seeing designers rely on the unique characteristics of HaloFlex to illuminate interior spaces as well, commonly installed in coves and contouring curved architectural elements. Extensive testing of mechanical performance, heat dissipation and material durability ensure these systems are the most durable on the market. HaloFlex is manufactured by an international partner that Digilin has been cooperating with for over 13 years.



Illumination Type	Front-Lit (Vertical Bending)
LED Colour	Fixed White
CCT/Wavelength	3500K
Delivered Lumens	470lm/m
Power	12W/m
Typical CRI	90
Colour Consistency (LED)	3 SDCM
Performance	L90 (6k) >60,000hrs
Module Length	55.56mm
Operating Temperature	-40 to 55 degrees Celsius
Maximum Continuous Feed	15m Single, 30m Dual
Input Voltage	24VDC
IP Rating	IP68 (with Injection Moulded Connectors and End Caps)
IK Rating	IK08
Beam Angle	Approx. 115 degrees
Build Material	Silicone
Minimum Bend Radius	150mm
Dimensions	16mm (width), 17mm (height)
Weight	Approx. 0.5kg/m
Durability	UV, Saltwater, Solvent and Flame Resistant
Connector Options	Injection Moulded Connectors and End Caps (fitted), or Snap Connectors and End Caps (IP67) (supplied separately)
Mounting Options	Standard or Serrated Aluminium, Transparent Plastic or Aluminium Plastic Combination

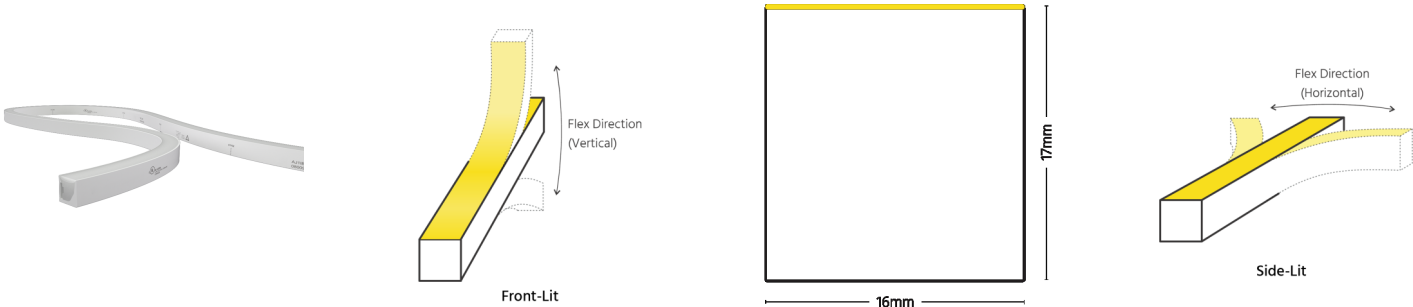

Specifications are subject to change without notice