


Laser Blade XS

LBXS-004570 - White body Black optic

LBXS-CM-CE-F-B-8040-RW03-DS-I-10C-B-1-ST-0104

iGuzzini

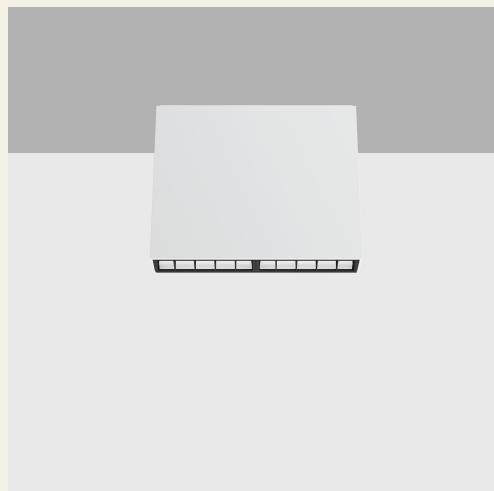

PART OF
LASER BLADE XS WALL WASHER - CEILING

DESCRIPTION

Laser Blade XS - Ceiling Mounted - Ceiling - Fix
- CRI80 - 4000K - Reflector - WW-LGC - Wall
Washer LGC - DALI-2 - Integral - 10 cells - 220-240
VAC - Class I - Standard no cable - White - Black

16 W system

610 lm system

38.1 Luminous efficiency - lm/W (system value)

4000 K

**CRI 80 - CRI (typical) 82 - Rf (Colour Fidelity
Index) 84 - Rg (Gamut Index) 96**

Control DALI-2

BODY COLOUR

☐ 01 White

STANDARD

OPTIC COLOUR

☒ 04 Black

STANDARD

Specification sheet generated on 25/08/2026

TECHNICAL DATA

DESCRIPTION

Miniaturized lighting fixture Laser Blade XS
Linear optical element with 10 cells (10 LEDs)
Ceiling-mounted lighting fixture. Main body in painted extruded aluminum and
shaped steel mounting plate.
LED Single Chip High Power 4000K
LED Color Rendering Index -CRI80-
High-definition Opti Beam reflector in metallized thermoplastic material.
Wall Washer LGC optics: The patented optical system technology ensures
homogeneous and efficient wall emission, preventing shadow zones near the
ceiling.
Black polycarbonate raster with glossy surface (not painted).
Product includes a DALI-2 dimmable electronic driver.
The driver is integrated into the product body.
Die-cast aluminum painted white RAL 9010.

TECHNICAL PERFORMANCE



Class I



Protected against the penetration of solids larger than 1 mm,
Protected against rain

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)

0.69 kg

PRODUCT CERTIFICATION



CCC PENDING



BIS



CE



ENEC-03



UK
CONFORMITY
ASSESSED

Laser Blade XS


LBXS-004570 - White body Black optic

LBXS-CM-CE-F-B-8040-RW03-DS-I-10C-B-1-ST-0104



DIMENSIONS

Dimensions	184x26x160
------------	------------





PHOTOMETRIC DATA

DETAILS

Im system	610
W system	16
Im source	2040
W source	16
Luminous efficiency - Im/W (system value)	38.1 lm/W system
Light output ratio (LOR)	30
Optic and beam angle	Wall Washer LGC 58° / 56°
Adjustability	fixed
CRI	80
Colour temperature	4000 K
MacAdam Step	3
Lifetime LED 1	>50,000h - L90 - B10 (Ta 25°C)

CHARTS AND POLAR CURVES

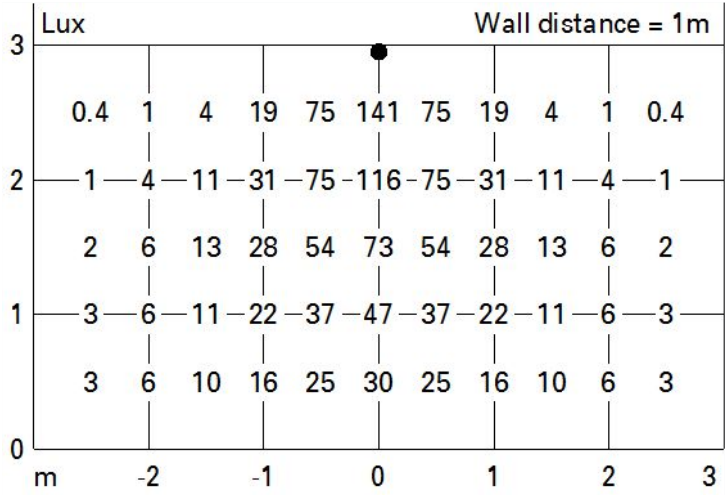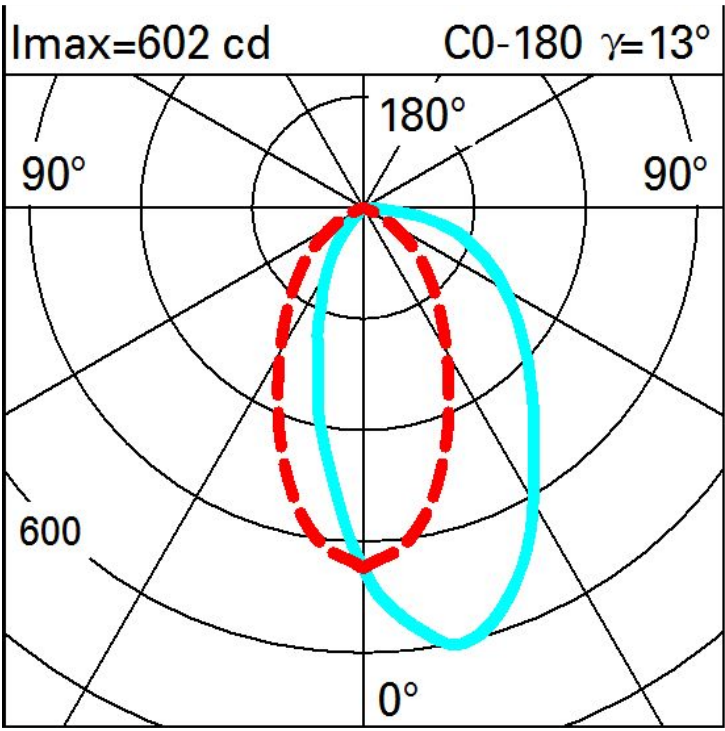

Laser Blade XS

LBXS-004570 - White body Black optic

LBXS-CM-CE-F-B-8040-RW03-DS-I-10C-B-1-ST-0104

ELECTRICAL DATA

CONTROL

Maximum number of luminaires of this type per miniature circuit breaker	B10A: 21 luminaires B16A: 34 luminaires C10A: 35 luminaires C16A: 57 luminaires
Overvoltage protection	2 kV and 1 kV
Inrush current	9
Voltage	220-240 VAC
Control	DALI-2

INSTALLATION

DESCRIPTION

Surface-mounted product with included mounting plate.

Installation Environment	Indoor
Mounting	Ceiling surface