


Laser Blade XS

LBXS-004930 - White body Black optic Standard no cable

LBXS-RE-FR-F-B-9035-RW03-DS-I-05C-B-2-ST-0104

iGuzzini

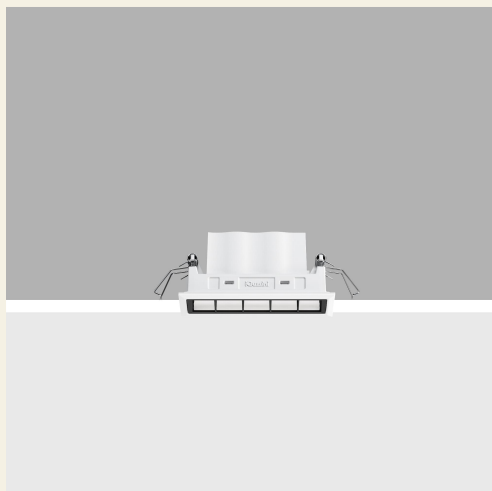

PART OF
LASER BLADE XS WALL WASHER LGC

BODY COLOUR

☐ 01 White STANDARD

DESCRIPTION

Laser Blade XS - Recessed - Frame - Fix - CRI90 - 3500K - Reflector - WW-LGC - Wall Washer LGC - DALI-2 - Integral - 5 cells - 220-240 VAC - Class II - Standard no cable - White - Black

8.9 W system

280 lm system

31.5 Luminous efficiency - lm/W (system value)

3500 K

CRI 90 - Rf (Colour Fidelity Index) 91 - Rg (Gamut Index) 102

Control DALI-2

OPTIC COLOUR

☒ 04 Black STANDARD

Specification sheet generated on 25/08/2026

CABLE

SELECTED

Standard no cable

TECHNICAL DATA

DESCRIPTION

Miniaturized lighting fixture Laser Blade XS
Linear optical element with 5 cells (5 LEDs)
Recessed lighting fixture with a radiant surface in die-cast zama, complete with springs for installation.
Frame version with a perimeter trim.
LED Single Chip High Power 3500K
LED Color Rendering Index -CRI90-
High-definition Opti Beam reflector in metallized thermoplastic material.
Wall Washer LGC optics: The patented optical system technology ensures homogeneous and efficient wall emission, preventing shadow zones near the ceiling.
Black polycarbonate raster with glossy surface (not painted).
Product includes a DALI-2 dimmable electronic driver.
The driver is positioned externally to the lighting fixture and is already connected via a dedicated cable.
Die-cast aluminum painted white RAL 9010.

TECHNICAL PERFORMANCE



Class II



IP20/43 Ceiling - IP20/40 Wall

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)

0.35 kg

Laser Blade XS

LBXS-004930 - White body Black optic Standard no cable

LBXS-RE-FR-F-B-9035-RW03-DS-I-05C-B-2-ST-0104



DIMENSIONS

Dimensions

100x28x50

PRODUCT CERTIFICATION



CCC PENDING



BIS PENDING



CE



ENEC-03



UK
CONFORMITY
ASSESSED

Laser Blade XS

LBXS-004930 - White body Black optic Standard no cable



LBXS-RE-FR-F-B-9035-RW03-DS-I-05C-B-2-ST-0104

PHOTOMETRIC DATA

DETAILS

Im system	280
W system	8.9
Im source	940
W source	7.1
Luminous efficiency - lm/W (system value)	31.5 lm/W system
Light output ratio (LOR)	30
Optic and beam angle	Wall Washer LGC
Glare Index	G*2
Adjustability	fixed
CRI	90
Colour temperature	3500 K
MacAdam Step	3
Lifetime LED 1	>50,000h - L90 - B10 (Ta 25°C)

CHARTS AND POLAR CURVES

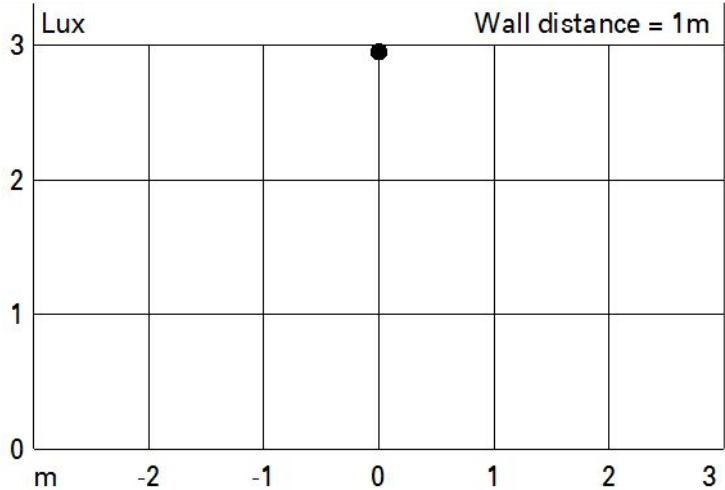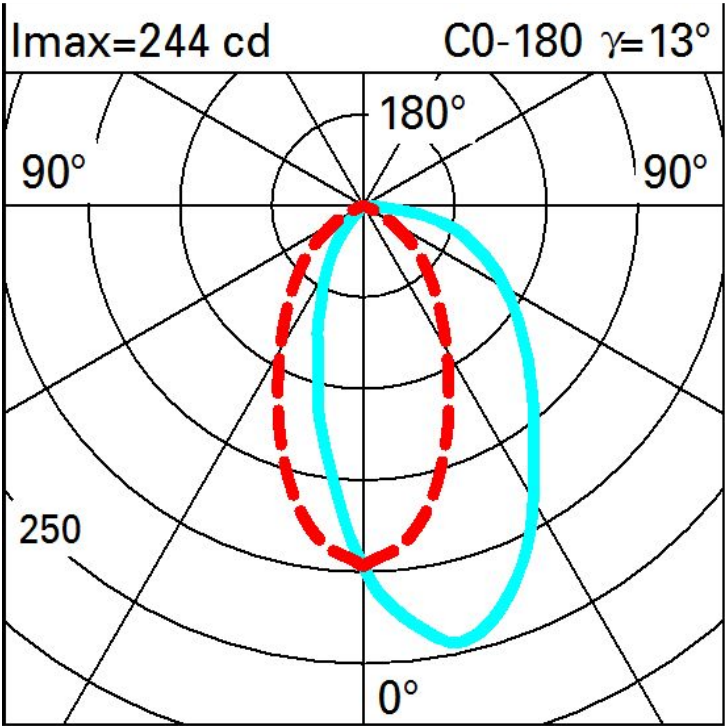

Laser Blade XS

LBXS-004930 - White body Black optic Standard no cable

LBXS-RE-FR-F-B-9035-RW03-DS-I-05C-B-2-ST-0104

ELECTRICAL DATA

CONTROL

Maximum number of luminaires of this type per miniature circuit breaker	B10A: 20 luminaires B16A: 33 luminaires C10A: 34 luminaires C16A: 56 luminaires
Overvoltage protection	2 kV and 1 kV
Inrush current	9
Minimum dimming	1
Ballast losses	1.8
Voltage	220-240 VAC
Control	DALI-2

INSTALLATION

DESCRIPTION

Recessed installation with included springs. For details regarding plasterboard heights, refer to the instruction sheet.

Installation Environment	Indoor
Mounting	Recessed