


Laser Evo

LSEVO-AAH66Y - Black body Black optic

LSEVO-RE-CO-F-B-9035-LP02-EX-F-17-3-ST-0404-01

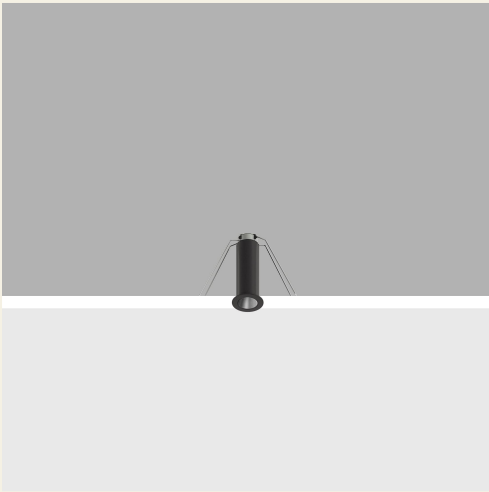

PART OF
LASER EVO RECESSED Ø 17 MM CONE

DESCRIPTION
Laser Evo - Recessed - Cone - Fix - CRI90 - 3500K
- Lens - S - Spot - External - Full Remote - 17 mm -
Class III - Standard no cable - Black - Black

1.4 W system
80 lm system
57.1 Luminous efficiency - lm/W (system value)
3500 K
CRI 90 - CRI (typical) 92 - Rf (Colour Fidelity Index) 93 - Rg (Gamut Index) 99
Control External

BODY COLOUR

☒ 04 Black STANDARD

OPTIC COLOUR

☒ 04 Black STANDARD

Specification sheet generated on 25/08/2026

REQUIRED ACCESSORIES

SELECTED



MY03

On-off Constant Current Power Supply IP20 13-20W - Vin = 220-240 Vac 50/60 Hz - I out = 500 mA

SIZE (MM) 111X52X22 -
WEIGHT (KG) 0.09

POWER SUPPLY

☒ 00 Indetermina...

TECHNICAL DATA

DESCRIPTION

Next-generation recessed lighting fixture "Laser Evo", designed to offer high optical performance, maximum efficiency, and an integrated design for various architectural environments.

Recessed mount designed for easy and precise installation in a Ø17 mm mounting hole.

Front element with conical profile baffle "Cone".

Fixed version.

LED color temperature 3500K with high color rendering index. CRI90.

Version with lens.

With Spot optics.

Front baffle in Black.

Class III lighting fixture. Driver to be ordered separately (refer to instruction sheet for correct number of products per driver).

TECHNICAL PERFORMANCE



Class III



IP20 (protected against penetration of solids larger than 12 mm, not protected against penetration of liquids) - IP43 (protected against the penetration of solids larger than 1 mm, protected against rain - on the visible part of the product once installed) - Ceiling

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)	0.03 kg
-------------	---------

Laser Evo

LSEVO-AAH66Y - Black body Black optic

LSEVO-RE-CO-F-B-9035-LP02-EX-F-17-3-ST-0404-01



PRODUCT CERTIFICATION



CE



PEP
ECOPASSPORT



UK
CONFORMITY
ASSESSED



ENEC PENDING

PHOTOMETRIC DATA

DETAILS

Im system	80
W system	1.4
Im source	150
W source	1.4
Luminous efficiency - Im/W (system value)	57.1 lm/W system
Light output ratio (LOR)	53
Optic and beam angle	S - Spot 14°
Adjustability	fixed
CRI	90
Colour temperature	3500 K
MacAdam Step	2
Lifetime LED 1	>50,000h - L90 - B10 (Ta 25°C)

ELECTRICAL DATA

CONTROL

Control	External
---------	----------

INSTALLATION

DESCRIPTION

Recessed ceiling installation via anti-fall steel wire springs.

Installation Environment	Indoor
Mounting	Recessed