


Lucca Surface

Active

LUCCA 650 Fixed Output 4000K Ra90 Surface Mounted Black Finish
LUO.65010UFO.4090.2-SM

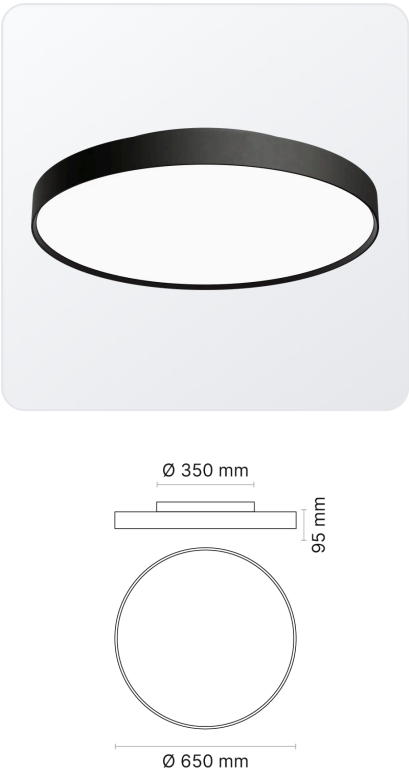

Optical

Optical Description	Low glare opalescent primary diffuser for direct illumination. Secondary 'halo' diffused led array for indirect illumination		Output (lm)	9030
Efficacy	93	Downward Output	7250	
Upward Output	1780	UWLR	1780	
Light Distribution Up %	20	Light Distribution Down %	80	
CCT	4000K	CRI	Ra90	
Horizontal Beam Angle	115.0	Vertical Beam Angle	115.0	
MacAdam Step	3	Max Intensity	2536.0	
Luminous Length (X)	628mm	Luminous Width (Y)	628mm	
Luminous Height (Z)	60mm			

Physical

Finish Colour	Black	Housing Material	Aluminium primary housing, with formed steel mounting plate
Optic Material	Opalescent Primary/Secondary Diffuser	Mounting Type	Surface mounted
Dimensions	650mm	IP Rating	IP20

Electrical

Watts	97	Rated Voltage	220-240VAC
Electrical Class	Class II	Driver Control	Fixed Output
Driver Mounting	Integral		

Certifications

Warranty	5 Years
----------	---------