

Project name	Location	Type	Revision number	Date

LIGMAN

Indoor | Recessed ceiling luminaires | OULU
OULU 1 (OUL-80012)

OULU 1 - OUL-80012 - 384 LED - 27 W - TW (2700K - 6500K) - DALI - OAK - WOODLAND


OUL-80012-O-TW2765-DA-SW01



Product description

Down - 180° - R500 - Tunable White

Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

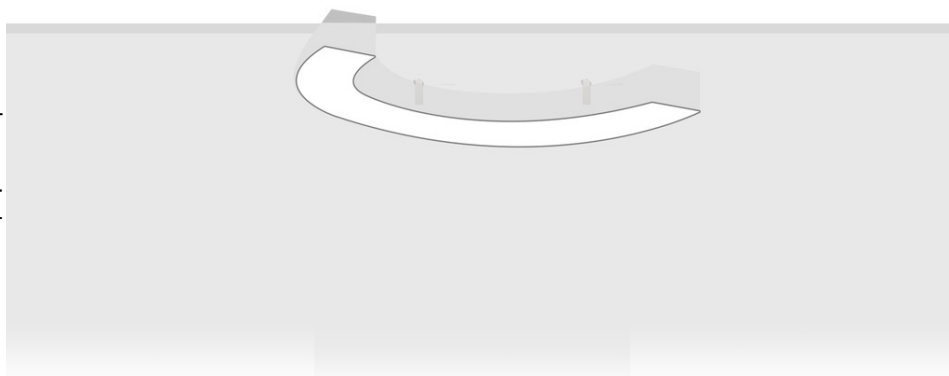

Luminaire structure

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Opal PMMA diffuser (UGR <19) for glare control
- Integral control gear
- Remote driver is included for dimming type: 1-10V (-DI)
- Stainless steel brackets and screws for mounting
- Down light distribution only
- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options

Optic



Product colour



- SW01
Oak - Woodland


OULU 1 - OUL-80012 - 384 LED - 27 W - TW (2700K - 6500K) - DALI - OAK - WOODLAND

OUL-80012-O-TW2765-DA-SW01

Technical information

Variant code	OUL-80012-O-TW2765-DA-SW01	Input voltage	220-240 V 50/60 Hz	Inrush current	5 A / 50 µs
Material	Aluminium	Optic	O	Maximum number of luminaires of this variant per miniature circuit breaker:	
Light source	384 LED	CCT / CRI	TW (2700K - 6500K)	B 10A	31 luminaires
Power	27 W	Dimming type	DALI	B 16A	50 luminaires
Lumen	2732 lm	Product colours	Oak - Woodland	B 20A	62 luminaires
Efficacy	101 lm/W	Weight	4.2 kg	C 10A	52 luminaires
Driver option	Remote driver (included)	Operating temperature	-20 °C to 40 °C	C 16A	85 luminaires
Driver	Constant current (CC)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)		C 20A	104 luminaires

OUL-80012

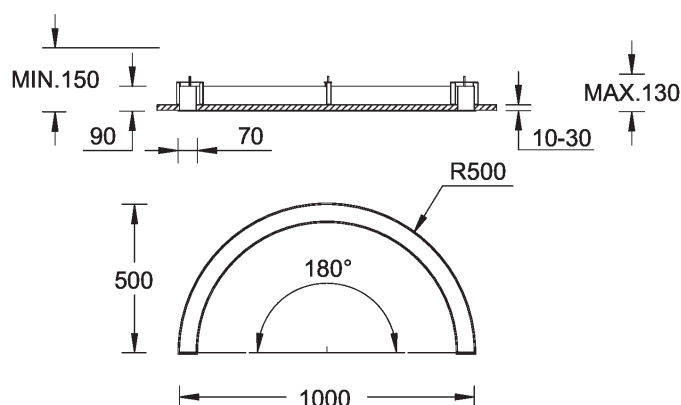

OULU 1 - OUL-80012 - 384 LED - 27 W - TW (2700K - 6500K) - DALI - OAK - WOODLAND

OUL-80012-O-TW2765-DA-SW01

Accessory



Continuous-coupler bracket
A81781



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI