



PART OF
VIEW WALL MOUNTED 210X144MM

SELECTED COLOUR
 **47 White / Black** **STANDARD**

DESCRIPTION
large body - warm white - DALI - up light wall washer optic
WW - Wall Washer
34.6 W system
2827.5 lm system
81.72 lm/W
3000 K
CRI 82 - Rf (Colour Fidelity Index) 85 - Rg (Gamut Index) 97
DALI-2

DESIGNED BY
iGuzzini / Arup

Specification sheet generated on 25/08/2026

TECHNICAL DATA


LAST UPDATE: 06/08/2026

DESCRIPTION

Indoor, indirect light, wall-mounted luminaire designed to use warm white PCB LED lamps (3000K). 100% up light beam. The product's optical assembly is made of die-cast aluminium. Product complete with super pure anodized aluminium reflector to guarantee wall washer up light distribution for general lighting. DALI ballast integrated in the body. Passive heat dissipation.

DIMENSIONS

General (mm)	178x210x67
--------------	------------

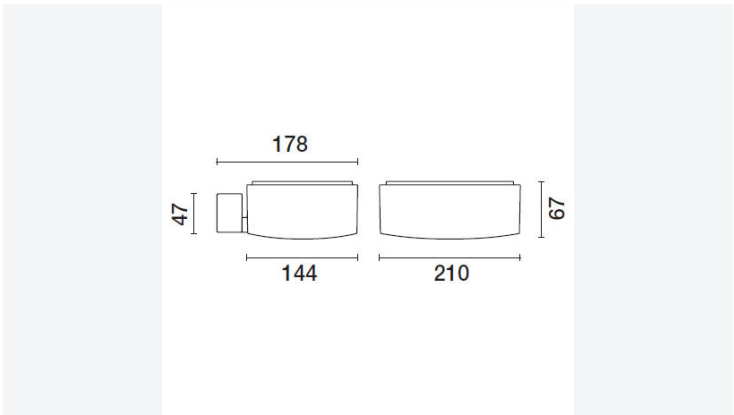

TECHNICAL PERFORMANCE

	Class I
	Protected against penetration of solids larger than 12 mm, not protected against penetration of liquids.
	Protected against the penetration of solids larger than 1 mm, not protected against penetration of liquids. For optical assembly

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)	2.3
Material	Aluminium and thermoplastic

PRODUCT CERTIFICATION



BIS



CCC S&E



CE



EAC



ENEC-03



NOM



RETILAP



TISI - THAI
INDUSTRIAL
STANDARD
INSTITUTE




UK
CONFORMITY
ASSESSED

PHOTOMETRIC DATA

DETAILS

Im system	2827.5
W system	34.6
Im source	4350
W source	31
Luminous efficiency - Im/W (system value)	81.72
Im in emergency mode	-
Maximum intensity (cd)	2252
Total light flux at or above an angle of 90° (Lm)	2828
Light output ratio (LOR)	65
Optic and beam angle	WW - Wall Washer
Adjustability	fixed
Light colour quality	CRI 82 - Rf (Colour Fidelity Index) 85 - Rg (Gamut Index) 97
Colour temperature	3000 K
MacAdam Step	3
Lifetime LED 1	>50,000h - L90 - B10 (Ta 25°C)

CHARTS AND POLAR CURVES

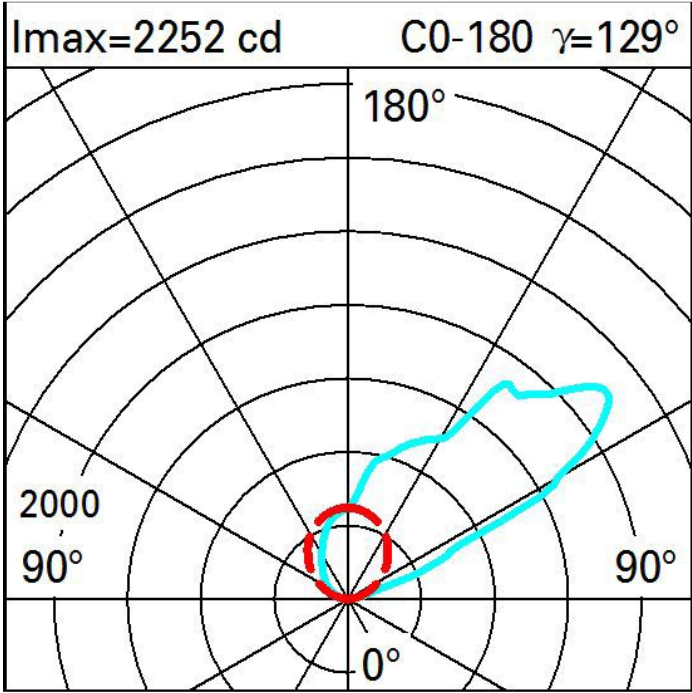

ELECTRICAL DATA

Power factor	See installation instructions
Maximum number of luminaires of this type per minature circuit breaker	B10A: 8 luminaires B16A: 14 luminaires C10A: 14 luminaires C16A: 23 luminaires
Overvoltage protection	2kV Common mode & 1kV Differential mode
Inrush current	24 A / 192 µs
Minimum dimming	1
Voltage	220 - 240
ZVEI code	LED
Power Supply	Driver included
Mounting options	Integral
Dimmable option	Dimmable
Control	DALI-2

INSTALLATION

DESCRIPTION

Wall-mounted

Mounting	Surface mounted, Wall surface
Wiring	Product complete with DALI components