


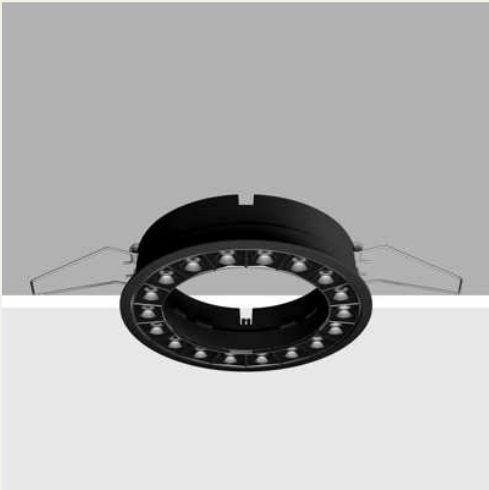

PART OF

BLADE R Ø170MM

SELECTED COLOUR

43 Black / Black

STANDARD

DESCRIPTION

Frame Ø 170 - Medium beam - LED

M - Medium 26°

39.1 W system

3436.5 lm system

87.89 lm/W

4000 K

CRI 82 - Rf (Colour Fidelity Index) 83 - Rg (Gamut Index) 92

DALI-2

DESIGNED BY

iGuzzini

Specification sheet generated on 25/08/2026

TECHNICAL DATA

LAST UPDATE: 06/08/2026

DESCRIPTION

Ring luminaire with 18 optical elements for LED lamps - fixed optics. The optic system guarantees a high level of visual comfort and no glare. The body includes a radiant surface made of die-cast aluminium. Version includes a perimeter surface frame.

High definition reflectors made of thermoplastic material vacuum-metallised with aluminium vapours, integrated in a set-back position in the anti-glare screen.

Supplied with a power supply unit connected to the luminaire.

TECHNICAL PERFORMANCE

Class II

IP20

Protected against penetration of solids larger than 12 mm, not protected against penetration of liquids.

IP23

Protected against penetration of solids larger than 12 mm, protected against rain.

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)	0.68
Material	Die-cast aluminium and thermoplastic

PRODUCT CERTIFICATION

CCC S&E

CE

EAC

ENEC-03

NOM


RETILAP

TISI - THAI INDUSTRIAL

BIS PENDING

DIMENSIONS

Diameter (mm)	ø180
Shape	Round
Recessed hole dimensions (mm)	ø170




PHOTOMETRIC DATA

DETAILS

Im system	3436.5
W system	39.1
Im source	4350
W source	36
Luminous efficiency - Im/W (system value)	87.89
Im in emergency mode	-
Maximum intensity (cd)	15283
Total light flux at or above an angle of 90° (Lm)	0
Light output ratio (LOR)	79
Optic and beam angle	M - Medium 26°
Adjustability	fixed
Light colour quality	CRI 82 - Rf (Colour Fidelity Index) 83 - Rg (Gamut Index) 92
Colour temperature	4000 K
MacAdam Step	2
Lifetime LED 1	>50,000h - L90 - B10 (Ta 25°C)

CHARTS AND POLAR CURVES

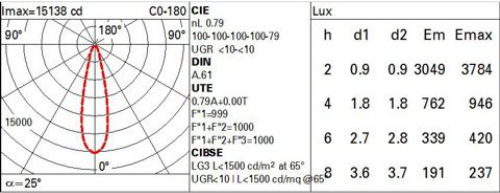

ELECTRICAL DATA

ZVEI code	LED
Power Supply	Driver included
Dimmable option	Dimmable
Control	DALI-2

INSTALLATION

DESCRIPTION

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - Ø 170 installation hole.

Mounting	Ceiling recessed
Wiring	On the power supply unit with terminal board included. Available in DALI versions.