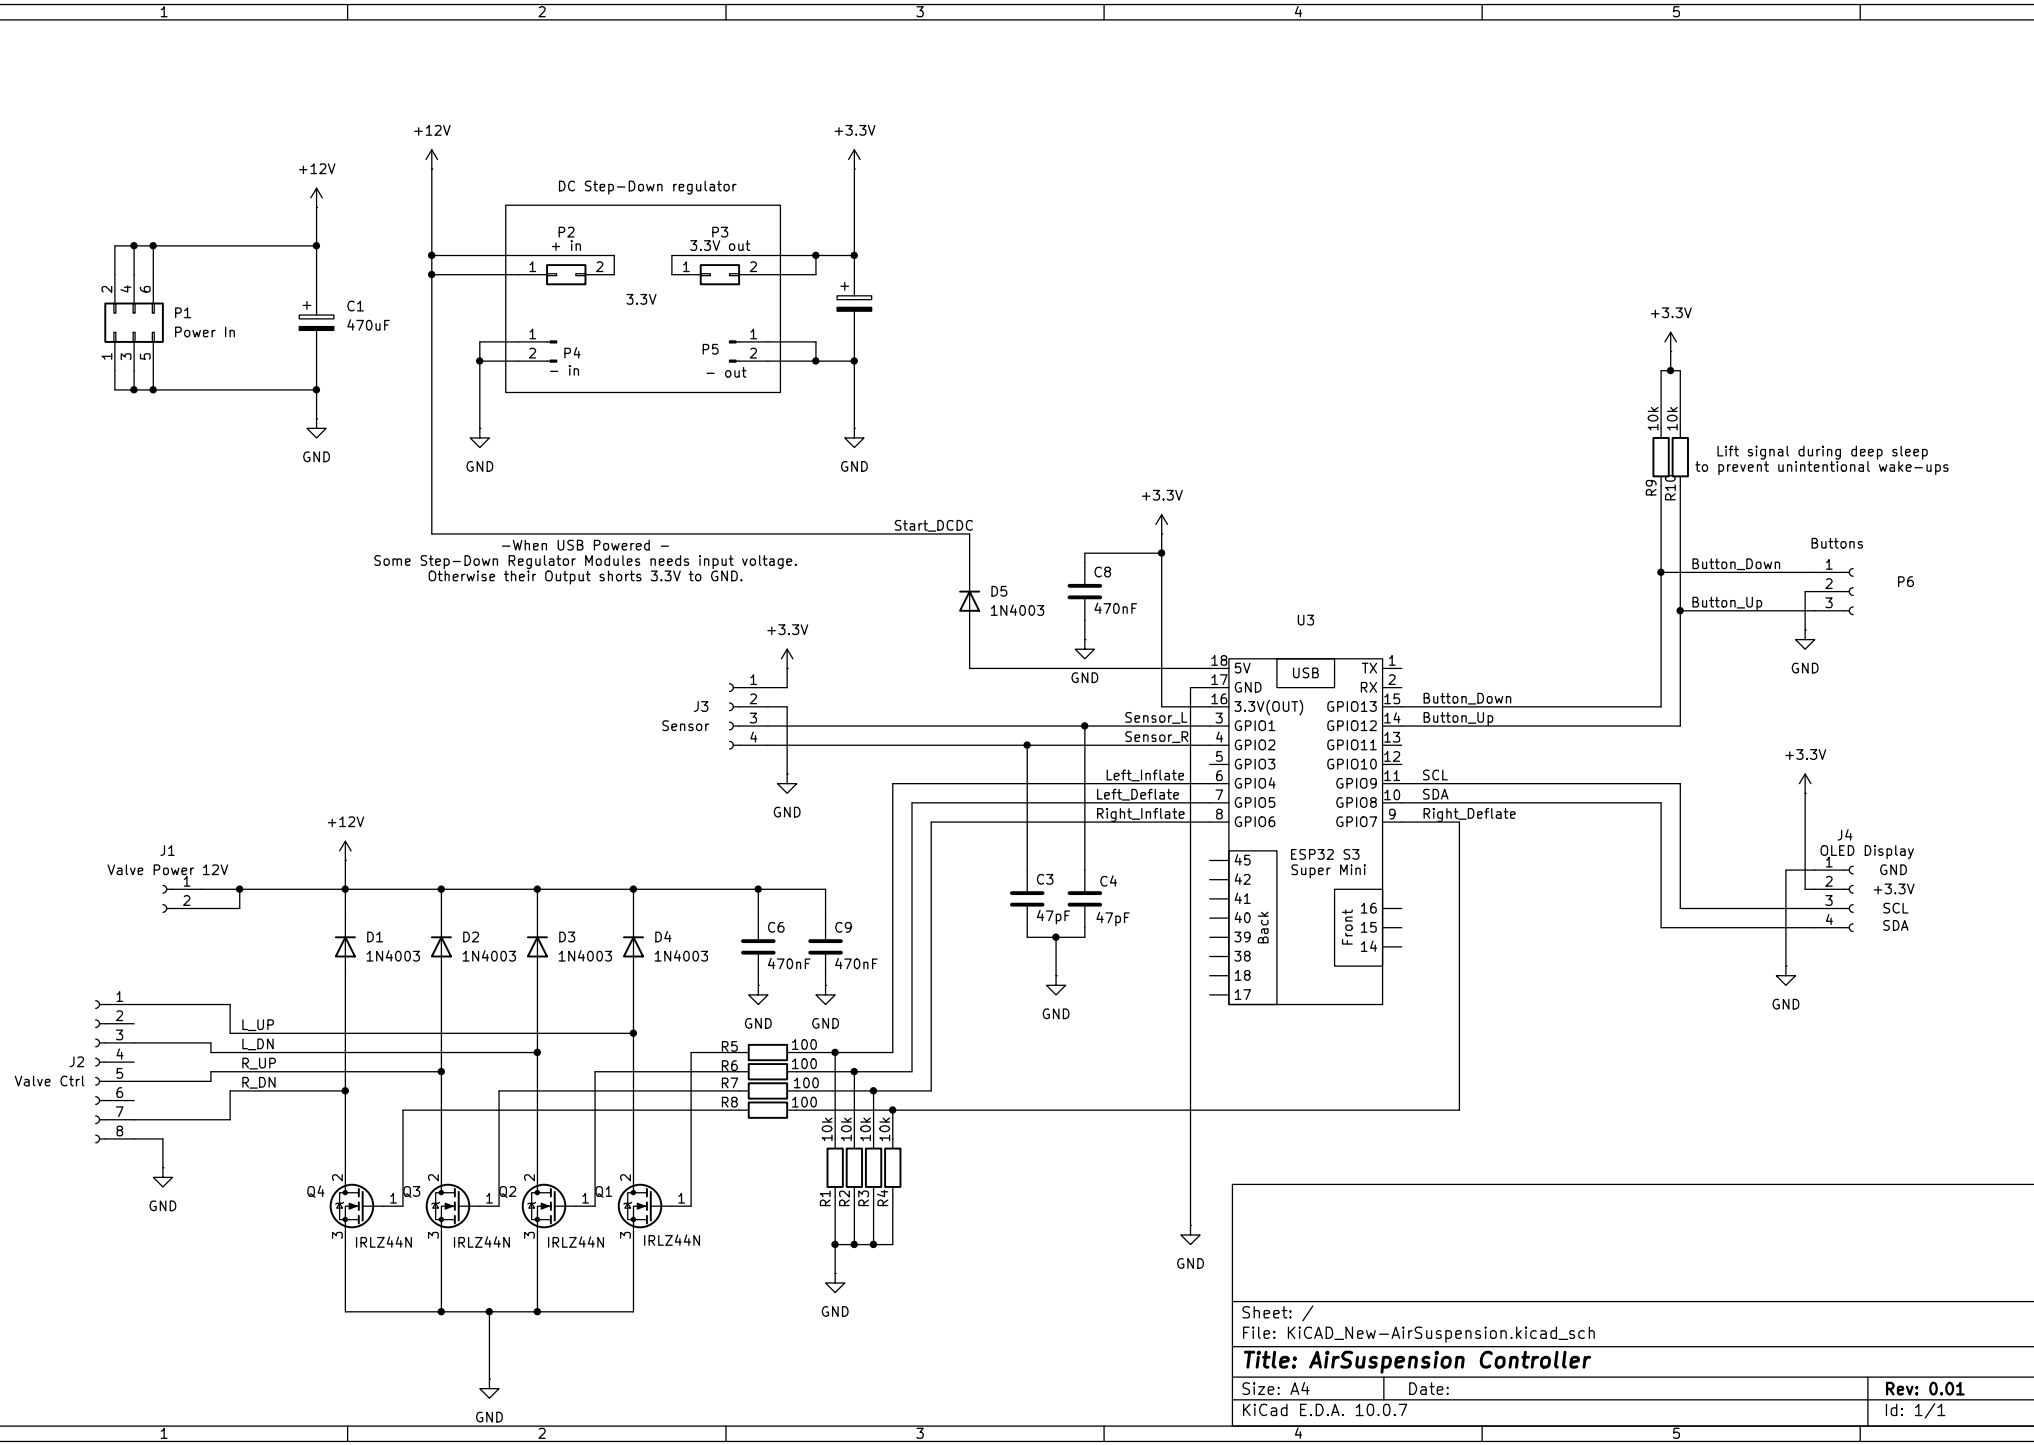
+12V
P1
Power In
C1
470uF
GND
DC Step-Down regulator
P2
+ in
P3
3.3V out
3.3V
P4
- in
P5
- out
+3.3V
When USB Powered -
Some Step-Down Regulator Modules needs input voltage.
Otherwise their Output shorts 3.3V to GND.
Start_DCDC
D5
1N4003
C8
470nF
U3
5V
GND
3.3V(OUT)
GPIO1
GPIO2
GPIO3
GPIO4
GPIO5
GPIO6
USB
TX
RX
GPIO13
GPIO12
GPIO11
GPIO10
GPIO9
GPIO8
GPIO7
Sensor_L
Sensor_R
Left_Inflate
Left_Deflate
Right_Inflate
Button_Down
Button_Up
SCL
SDA
Right_Deflate
ESP32 S3
Super Mini
Back
Front
J3
Sensor
R9
R10
10k
Lift signal during deep sleep
to prevent unintentional wake-ups
Buttons
P6
J4
OLED Display
J1
Valve Power 12V
D1
1N4003
D2
1N4003
D3
1N4003
D4
1N4003
C6
470nF
C9
470nF
C3
47pF
C4
47pF
J2
Valve Ctrl
L_UP
L_DN
R_UP
R_DN
R5
R6
R7
R8
100
R1
R2
R3
R4
10k
Q4
Q3
Q2
Q1
IRLZ44N
Sheet: /
File: KiCAD_New-AirSuspension.kicad_sch
Title: AirSuspension Controller
Size: A4
Date:
Rev: 0.01
KiCad E.D.A. 10.0.7
Id: 1/1