


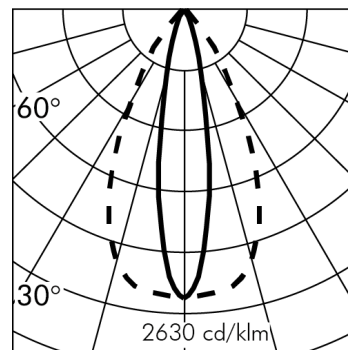


MINISHIFT BOLLARD H635

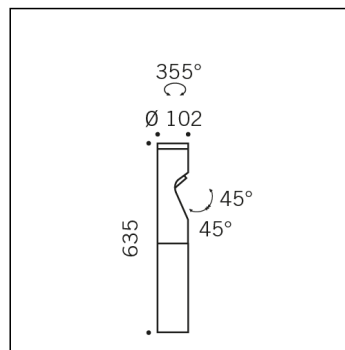

*Photometric measured using WHITE LED 3000K

Version available on request without price surcharge.

S.1452N.24 (Anthracite grey)

1 module LED 4000K 220-240Vac **DIMMABLE DALI2; PUSH** Bollard

Light Source Technical Data

Light source type:	LED
Colour temperature:	4000K
Rated module luminous flux:	1650lm
Rated luminaire luminous flux:	869lm
Rated module power:	12.7W
Rated luminaire power:	14.7W
Luminaire efficacy:	59lm/W
ULR:	0%
CIE Flux Code:	97 100 100 100 100
Color Rendering Index:	CRI 80
Standard Deviation Color Matching:	MacAdam step 3

Temperature and life time Technical Data

LED Lifetime:	L80 B10 70.000h Ta 25°C L80 B10 50.000h Ta 40°C
Lifespan of the LUMINAIRE:	min. 70.000h Ta 25°C min. 50.000h Ta 40°C
Performance ambient temperature:	Tq 25°C
Operating ambient temperature range:	da -20°C a +50°C
Storage temperature range:	da -20°C a +60°C

WARRANTY


All Simes products are covered by an extended 5-year warranty. For terms and conditions, see www.simes.it/warranty

Power Supply Technical Data

Voltage (AC):	220-240Vac
Frequency (AC):	50/60Hz
Voltage (DC):	170-276Vdc (No PUSH DIM)
	DALI2; PUSH
Dimmable:	PUSH Synchronization: - Max 4 Luminaires, distance <15m; - Max 35 Luminaires, distance <300m with S.2490 accessory.
Inrush Current:	5A 50µsec
Max. quantity of fixtures for Minature Circuit Breaker type B16A:	50
Max. quantity of fixtures for Minature Circuit Breaker type C16A:	85
Surge protection (between L-N):	2kV
Surge protection (between L/N-PE):	4kV

Technical Installation Data

Electrical insulation class:	II
Protection class IP:	IP66
Mechanical resistance:	IK10
Weight:	5.1182Kg
Power cable:	0.2m - H05RN-F

MINISHIFT BOLLARD H635
S.1452N.24 (Anthracite grey)**SPECS SHEET****LUMINAIRE TYPE**

Bollard fitting. IP rating IP 66

MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-44300 (low copper content) and extruded EN AW-6060 with high resistance against corrosion. Stone wash surface treatment prior to painting process. Steel Allen screws with insulating treatment against galvanic corrosion. Pre treated Silicone Gaskets. **Extra-resistant**

Painting Process:

Extra-resistant exterior coating. Product suitable for applications in high-humidity environments, C5 ZONE (according to UNI EN ISO 9223:2012).

Mechanical resistance IK 10

LIGHTING PERFORMANCE

Each spotlight is housed inside a head that can be controlled independently and freely rotated on its axis. Through fixing grains, it can be locked in the desired position. Spotlights integrated in the head can, in turn, be tilted up to a maximum of 90° horizontally and direct the beam downwards or be pushed forward to cover longer distances. The head can also be turned upside down. This additional degree of freedom allows to also direct the beam upwards so to light up, as example, a walkway and an adjacent wall with the same fitting.

INSTALLATION AND MAINTENANCE

Possibility to add up to two additional heads. The wiring of the fixtures must strictly respect the specifications. Shift Bollard: The bollard must be fixed to the flange accessory (S.2148) to be anchored in concrete or directly to the concrete base with three M8 anchor plugs (not supplied). Shift Pole: Aluminium pole Ø 102 H 2950mm included. Pole must be fixed to the anchoring base (S.1469) to be securely buried in concrete or to the square plate (S.1468).

WIRING

Supply 0.2m cable section type H05RN-F . Single cable entry sealed with B component epoxy resin, wired internally.. Isolation: CLASS II . Available colours: Black (cod.09), Anthracite grey (cod.24). Weight: 5.1182 Kg Glow Wire test: 850°C

LED module included**SHIFT REGISTERED DESIGN**

This luminaire contains built-in LED modules. In case of damage or malfunction please contact the manufacturer to receive additional instructions on how to replace and relative spare parts to order. The LED modules cannot be handled in the luminaire by the end user.

This product contains a light source of energy efficiency class (EPREL - European Product Registry for Energy Labelling): D.

LED modules are engineered accordingly to the existing regulations of Lumen Maintenance (LM80) and Technical Memorandum (TM21), where uniformity and quality of the light is 70,000 hours referred to L80 B10 Ta 25 ° C (50,000 hours referable to L80 B10 Ta 40°C). Lifespan of the luminaire min. 70.000 hours Ta 25°C, min. 50,000 hours at 40°C. Performance Ambient temperature Tq 25°C. Operating ambient temperature range is from -20°C to +50°C. Storage temperature range from -20°C to +60°C.

ELECTRONIC EQUIPMENT SENSITIVE TO OVERVOLTAGE.

We recommend installing surge protection devices "SPD" in the electrical system. Protection devices prevent the intensity of these phenomena's, protecting the appliances from the risk of being damaged and extending the lifespan. Outdoor luminaires are subject to all types of permanent, temporary, or transient electrical disturbances. Such disturbances can create permanent damage or failure affecting its performance and durability. The surge protection device (supplied by SIMES) is utilized to limit the destructive effect of these phenomena. We suggest that each luminaire must be connected to one protection device at not more than 10m away. For correct coordination of the protections, a surge protection device must also be provided inside the electrical panel of the system (the selection of this device must be carried out from the electrical designer and is not supplied by SIMES).

WARRANTY


All items produced from 01/01/2026 onwards are covered by a 5 (five)-year warranty against manufacturing and conformity defects, in accordance with the terms and limits set out in the manufacturer's official documentation. For full details, exclusions and warranty activation procedures, please refer to the following link: www.simes.it/warranty

MINISHIFT BOLLARD H635

S.1452N.24 (Anthracite grey)



ACCESSORIES




S.1465N

MINISHIFT ADDITIONAL HEAD WITH 16° OPTIC

LED MODULE 4000K CRI80 Rated module luminous flux: 1650lm
Rated luminaire luminous flux: 769lm Rated module power: 12,7W
Rated luminaire power: 14.7W 220V-240Vac 50/60Hz Dimmable DALI 2 / PUSH IK10

Possibility to add to MINISHIFT BOLLARD AND MINISHIFT POLE up to two additional heads, obtaining a configuration of two or maximum three heads.




S.1466N

MINISHIFT ADDITIONAL HEAD WITH 51° OPTIC

LED MODULE 4000K CRI80 Rated module luminous flux: 1650lm
Rated luminaire luminous flux: 1063lm Rated module power: 12,7W
Rated luminaire power: 14.7 220V-240Vac 50/60Hz Dimmable DALI 2 / PUSH IK10

Possibility to add to MINISHIFT BOLLARD AND MINISHIFT POLE up to two additional heads, obtaining a configuration of two or maximum three heads.



S.1467N

MINISHIFT ADDITIONAL HEAD WITH ELLIPTIC OPTIC

LED MODULE 4000K CRI80 Rated module luminous flux: 1650lm
Rated luminaire luminous flux: 869lm Rated module power: 12,7W
Rated luminaire power: 14.7 220V-240Vac 50/60Hz Dimmable DALI 2 / PUSH IK10

Possibility to add to MINISHIFT BOLLARD AND MINISHIFT POLE up to two additional heads, obtaining a configuration of two or maximum three heads.




S.2499

SURGE PROTECTION DEVICE 10kV CLASS II

Compatible with all lighting fixtures and electronic ballast accessories classified under electrical Protection Class II Rated voltage 230-277V SPD type 2+3 Max Surge Protection 10kV IP67

EACH FIXTURE MUST BE CONNECTED TO ONE SINGLE SURGE PROTECTION DEVICE AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2148 FLANGE

Flange Ø 102mm to be fixed in concrete with steel screws treated with an advanced anticorrosive coating for fixing in the ground. Footstall dimension can be calculated according to your country norms and ground properties.



S.2490

Signal converter Input PUSH DIM Output DALI 2

Features DALI-2 dimming (1-100%). Control unit for the conversion from push button to DALI-2 interface. Allowed powering up to 35 DALI-2 interface in BROADCAST. Input current typ. 70 Ma - max. 110 Ma. Application in installation boxes. Light regulation 1-100% by means of PUSH: - a short push to turn on and off; - a longer push to increase or decrease light intensity. Dimensions 43mm x 46mm x 18.5mm
Compatible with the DT6 protocol and only for monochromatic LEDs



S.2492

IP20 Interface Virtual Midnight/Bilevel (Step-Dimming)

This device is designed to maximize energy savings in various lighting applications. The devices can operate in two modes and are compatible exclusively with Simes DALI lighting fixtures: 1. Virtual Midnight: This system is designed for public outdoor lighting, enabling the automatic reduction of light output during periods when full-power operation is unnecessary. Configuring the system is straightforward, as programming is done via rotary selectors built into the device. 2. Bilevel (Step-Dimming): The two-level dimming system is commonly used in urban and street lighting, as well as in industrial facilities, emergency stairwells, parking lots, and other similar applications. The Bilevel function allows for adjusting the light intensity between two levels, using controls such as a relay, a twilight switch paired with a timer, or a motion sensor. The lighting level can be increased or decreased through simple programming using the rotary selectors built into the device. Dimensions 60mm x33mm x15mm

It can manage a maximum of 7 DALI luminaires/devices. Possibility to extend up to max. 64 luminaires through the DALI Expander (S.2494).



S.2493

IP67 Interface Virtual Midnight/Bilevel (Step-Dimming)

This device is designed to maximize energy savings in various lighting applications. The devices can operate in two modes and are compatible exclusively with Simes DALI lighting fixtures: 1. Virtual Midnight: This system is designed for public outdoor lighting, enabling the automatic reduction of light output during periods when full-power operation is unnecessary. Configuring the system is straightforward, as programming is done via rotary selectors built into the device. 2. Bilevel (Step-Dimming): The two-level dimming system is commonly used in urban and street lighting, as well as in industrial facilities, emergency stairwells, parking lots, and other similar applications. The Bilevel function allows for adjusting the light intensity between two levels, using controls such as a relay, a twilight switch paired with a timer, or a motion sensor. The lighting level can be increased or decreased through simple programming using the rotary selectors built into the device. Dimensions 175.5mm x86.5mm x43mm

It can manage a maximum of 7 DALI luminaires/devices. Possibility to extend up to max. 64 luminaires through the DALI Expander (S.2494).



S.2494

DALI EXPANDER

The IP20 DINrail device is used to extend a DALI circuit via broadcast. The received input signal is amplified and transmitted in broadcast to the DALI luminaires / DALI control gears. The DALI Expander has an integrated DALI bus power supply (200mA) which can control up to a maximum of 64 DALI devices within 300 meters.



S.2497

IP67 Interface Virtual Midnight/Bilevel (Step-Dimming) + Expander up to 64 luminaires

This device is designed to maximize energy savings in various lighting applications. The devices can operate in two modes and are compatible exclusively with Simes DALI lighting fixtures: 1. Virtual Midnight: This system is designed for public outdoor lighting, enabling the automatic reduction of light output during periods when full-power operation is unnecessary. Configuring the system is straightforward, as programming is done via rotary selectors built into the device. 2. Bilevel (Step-Dimming): The two-level dimming system is commonly used in urban and street lighting, as well as in industrial facilities, emergency stairwells, parking lots, and other similar applications. The Bilevel function allows for adjusting the light intensity between two levels, using controls such as a relay, a twilight switch paired with a timer, or a motion sensor. The lighting level can be increased or decreased through simple programming using the rotary selectors built into the device. Dimensions 175.5mm x86.5mm x43mm