


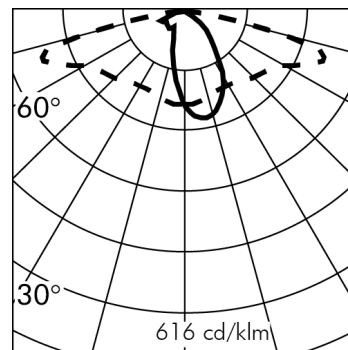
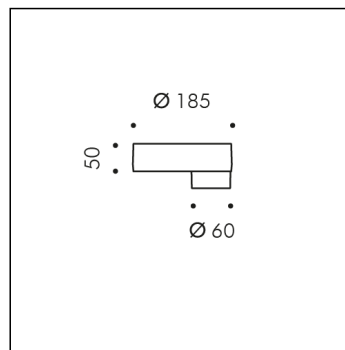


ANY-WAY 185mm POLE TOP 60mm x POLE H700mm

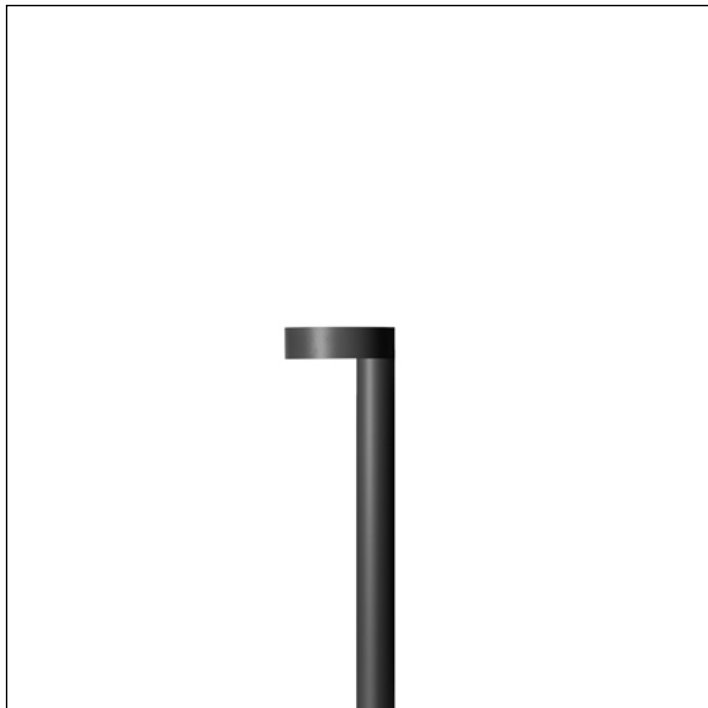

*Photometric measured using WHITE LED 3000K

NEW

Product is expected to be available from October 2026

Version available on request without price surcharge.

S.1955N.24 (Anthracite grey)

module LED 4000K 220-240Vac DIMMABLE DALI; DALI2; PUSH

Urban lighting



Light Source Technical Data

Light source type:	LED
Colour temperature:	4000K
Rated module luminous flux:	1515lm
Rated luminaire luminous flux:	1013lm
Rated module power:	7.7W
Rated luminaire power:	8.6W
Luminaire efficacy:	118lm/W
ULR:	0%
BUG:	B0 - U0 - G0
CIE Flux Code:	40 72 96 100 100
Color Rendering Index:	CRI 80

Standard Deviation Color Matching: MacAdam step 3

Temperature and life time Technical Data

LED Lifetime:	L80 B10 70.000h Ta 25°C L80 B10 50.000h Ta 40°C
Lifespan of the LUMINAIRE:	min. 70.000h Ta 25°C min. 50.000h Ta 40°C
Performance ambient temperature:	Tq 25°C
Operating ambient temperature range:	da -20°C a +50°C
Storage temperature range:	da -20°C a +60°C

Power Supply Technical Data

Voltage (AC):	220-240Vac
Frequency (AC):	50/60Hz
Voltage (DC):	176-276Vdc (No PUSH DIM)


Dimmable: DALI; DALI2; PUSH
PUSH Synchronization:
- Max 4 Luminaires, distance <15m;
- Max 35 Luminaires, distance <300m with S.2490 accessory.

Technical Installation Data

Electrical insulation class:	II
Protection class IP:	IP66
Mechanical resistance:	IK08
Power cable:	0.3m - H05RN-F

WARRANTY

All Simes products are covered by an extended 5-year warranty. For terms and conditions, see www.simes.it/warranty

ANY-WAY 185mm POLE TOP 60mm x POLE H700mm
S.1955N.24 (Anthracite grey)**SPECS SHEET****LUMINAIRE TYPE**

Post top luminaire. IP rating IP 66

MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-47100 (low copper content) and extruded EN AW-6060 with high resistance against corrosion. Stone wash surface treatment prior to painting process. Steel screws treated with an advanced anticorrosive coating. Silicone Gaskets. **Extra-resistant Painting Process:** Extra-resistant exterior coating. Product suitable for applications in high-humidity environments, C5 ZONE (according to UNI EN ISO 9223:2012).
Mechanical resistance IK 08

LIGHTING PERFORMANCE

The light distribution is in accordance with light pollution regulations. Any-Way is a family of poles with asymmetrical optics, designed to illuminate pedestrian and cycle paths. It projects light over long reaches, covering wide spacing and reducing the number of fixtures required to ensure uniformity and efficiency. The design is essential: a cylindrical pole with an offset head integrating a 4-LED optic in the Ø185 mm version and an 8-LED optic in the Ø250 mm version, combined with different pole heights to meet project and regulatory requirements. The Any-Way pole head, in both sizes, is also available with optics for squares and parking areas, designed to distribute light over a wide surface. Its performance and photometric distribution type complete the range, extending its use to this specific application. Toughened glass. LOR --

POLE CONNECTION

Pole head in painted aluminium with Ø 60 mm connection (S.1955/S.1956, S.1958/S.1959), Ø 76mm (S.1965/S.1966, S.1968/S.1969).

WIRING

Supply 0.3m cable section type H05RN-F . Single cable entry sealed with B component epoxy resin, wired internally. Fast connector IP67 (Ø 6÷12 mm) supplied as standard for single cable connection . Isolation: CLASS II . Available colours: Black (cod.09), Anthracite grey (cod.24). Weight: Kg Glow Wire test: --

LED module included**ANY-WAY PATENT PENDING and REGISTERED DESIGN**

This luminaire contains built-in LED modules. In case of damage or malfunction please contact the manufacturer to receive additional instructions on how to replace and relative spare parts to order. The LED modules cannot be handled in the luminaire by the end user.

This product contains a light source of energy efficiency class (EPREL - European Product Registry for Energy Labelling): E.

LED modules are engineered accordingly to the existing regulations of Lumen Maintenance (LM80) and Technical Memorandum (TM21), where uniformity and quality of the light is 70,000 hours referred to L80 B10 Ta 25 ° C (50,000 hours referable to L80 B10 Ta 40°C). Lifespan of the luminaire min. 70.000 hours Ta 25°C, min. 50,000 hours at 40°C. Performance Ambient temperature Tq 25°C. Operating ambient temperature range is from -20°C to +50°C. Storage temperature range from -20°C to +60°C.


ELECTRONIC EQUIPMENT SENSITIVE TO OVERVOLTAGE.

We recommend installing surge protection devices "SPD" in the electrical system. Protection devices prevent the intensity of these phenomena's, protecting the appliances from the risk of being damaged and extending the lifespan. Outdoor luminaires are subject to all types of permanent, temporary, or transient electrical disturbances. Such disturbances can create permanent damage or failure affecting its performance and durability. The surge protection device (supplied by SIMES) is utilized to limit the destructive effect of these phenomena. We suggest that each luminaire must be connected to one protection device at not more than 10m away. For correct coordination of the protections, a surge protection device must also be provided inside the electrical panel of the system (the selection of this device must be carried out from the electrical designer and is not supplied by SIMES).

WARRANTY

All items produced from 01/01/2026 onwards are covered by a 5 (five)-year warranty against manufacturing and conformity defects, in accordance with the terms and limits set out in the manufacturer's official documentation. For full details, exclusions and warranty activation procedures, please refer to the following link: www.simes.it/warranty

ANY-WAY 185mm POLE TOP 60mm x POLE H700mm S.1955N.24 (Anthracite grey)




ACCESSORIES



S.2499

SURGE PROTECTION DEVICE 10kV CLASS II

Compatible with all lighting fixtures and electronic ballast accessories classified under electrical Protection Class II Rated voltage 230-277V SPD type 2+3 Max Surge Protection 10kV IP67
EACH FIXTURE MUST BE CONNECTED TO ONE SINGLE SURGE PROTECTION DEVICE AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2802

H 0,7m Ø60mm CYLINDRICAL POLE TO BE BURIED

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 60mm, 3mm in thickness, total length 1,20m, single section built by using longitudinally welded tubes by induction welding (ERW) UNI EN 10219-2-ISO 4200

Suitable for ground recessed installation to a cement base 0,50m:
Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 0,7m.
Footstall dimension can be calculated according to your country norms and ground properties.

The grade of steel used is S235JR (Fe360B) with material characteristics as per normative UNI EN 10025;

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content.
POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions.
Resistance test protection for Marine applications for 1500h.



S.2490

Signal converter Input PUSH DIM Output DALI 2

Features DALI-2 dimming (1-100%). Control unit for the conversion from push button to DALI-2 interface. Allowed powering up to 35 DALI-2 interface in BROADCAST. Input current typ. 70 Ma - max. 110 Ma. Application in installation boxes. Light regulation 1-100% by means of PUSH: - a short push to turn on and off; - a longer push to increase or decrease light intensity. Dimensions 43mm x 46mm x 18.5mm
Compatible with the DT6 protocol and only for monochromatic LEDs



S.2492

IP20 Interface Virtual Midnight/Bilevel (Step-Dimming)

This device is designed to maximize energy savings in various lighting applications. The devices can operate in two modes and are compatible exclusively with Simes DALI lighting fixtures: 1. Virtual Midnight: This system is designed for public outdoor lighting, enabling the automatic reduction of light output during periods when full-power operation is unnecessary. Configuring the system is straightforward, as programming is done via rotary selectors built into the device. 2. Bilevel (Step-Dimming): The two-level dimming system is commonly used in urban and street lighting, as well as in industrial facilities, emergency stairwells, parking lots, and other similar applications. The Bilevel function allows for adjusting the light intensity between two levels, using controls such as a relay, a twilight switch paired with a timer, or a motion sensor. The lighting level can be increased or decreased through simple programming using the rotary selectors built into the device. Dimensions 60mm x 33mm x 15mm

It can manage a maximum of 7 DALI luminaires/devices. Possibility to extend up to max. 64 luminaires through the DALI Expander (S.2494).



S.2493

IP67 Interface Virtual Midnight/Bilevel (Step-Dimming)

This device is designed to maximize energy savings in various lighting applications. The devices can operate in two modes and are compatible exclusively with Simes DALI lighting fixtures: 1. Virtual Midnight: This system is designed for public outdoor lighting, enabling the automatic reduction of light output during periods when full-power operation is unnecessary. Configuring the system is straightforward, as programming is done via rotary selectors built into the device. 2. Bilevel (Step-Dimming): The two-level dimming system is commonly used in urban and street lighting, as well as in industrial facilities, emergency stairwells, parking lots, and other similar applications. The Bilevel function allows for adjusting the light intensity between two levels, using controls such as a relay, a twilight switch paired with a timer, or a motion sensor. The lighting level can be increased or decreased through simple programming using the rotary selectors built into the device. Dimensions 175.5mm x 86.5mm x 43mm
It can manage a maximum of 7 DALI luminaires/devices. Possibility to extend up to max. 64 luminaires through the DALI Expander (S.2494).