





NANOPOINTER 1LED MONOCHROME

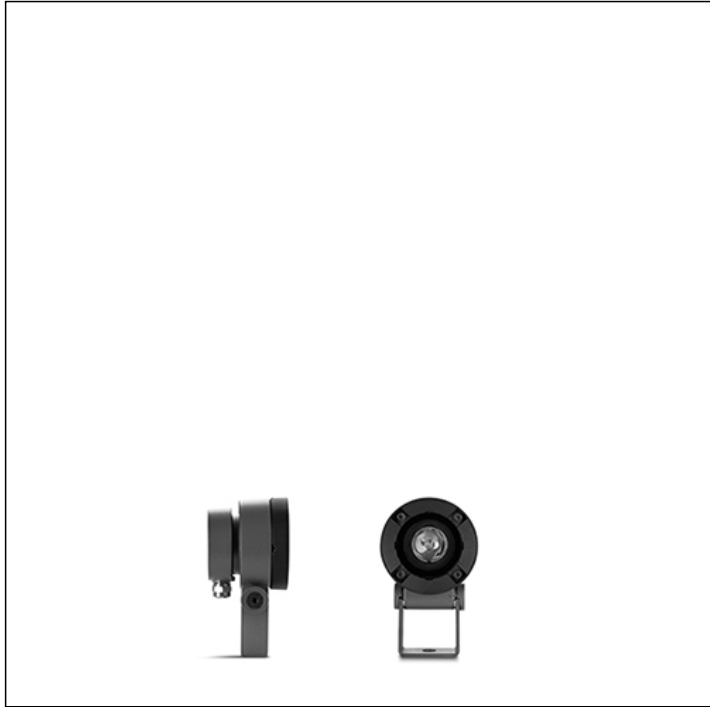

h(m)	9°	
	Ø(m)	3000K E(lx)
2	0.31	3097
4	0.62	774
6	0.92	344
8	1.23	194
10	1.54	124

NEW
Product is expected to be available from July 2026

S.2781W.24 (Anthracite grey)
1 module LED 3000K **24Vdc** **DIMMABLE** **PWM**
Spotlights



Light Source Technical Data

Light source type:	LED
Colour temperature:	3000K
Rated module luminous flux:	508lm
Rated luminaire luminous flux:	358lm
Rated module power:	3W
Rated luminaire power:	3.2W
Luminaire efficacy:	112lm/W
ULR:	0%
Color Rendering Index:	CRI 80
Standard Deviation Color Matching:	MacAdam step 3

Power Supply Technical Data

Voltage (DC):	24Vdc
See the SIMES power supply accessories list on the following pages	
Dimmable:	PWM

Technical Installation Data

Electrical insulation class:	III
Protection class IP:	IP66
Mechanical resistance:	IK07
Power cable:	0.25m


Temperature and life time Technical Data

LED Lifetime:	L80 B10 70.000h Ta 25°C
	L80 B10 50.000h Ta 40°C
Lifespan of the LUMINAIRE:	min. 70.000h Ta 25°C
	min. 50.000h Ta 40°C
Performance ambient temperature:	Tq 25°C
Operating ambient temperature range:	da -20°C a +50°C
Storage temperature range:	da -20°C a +60°C

WARRANTY

All Simes products are covered by an extended 5-year warranty. For terms and conditions, see www.simes.it/warranty

NANOPOINTER 1LED MONOCHROME S.2781W.24 (Anthracite grey)



SPECS SHEET

LUMINAIRE TYPE

Projector. IP rating IP 66

MATERIAL CHARACTERISTICS

Die-cast EN AB-44300 aluminium housing with high corrosion resistance. Stone wash surface treatment prior to painting process. Steel Allen screws with insulating treatment against galvanic corrosion. Silicone Gaskets. **Extra-resistant Painting Process:**

Extra-resistant exterior coating. Product suitable for applications in high-humidity environments, C5 ZONE (according to UNI EN ISO 9223:2012).

Mechanical resistance IK 07

LIGHTING PERFORMANCE

Pointer has a remarkable luminous flexibility through the use of interchangeable filters able to modify the shape and the width of the beam. The optical system has been engineered with hinge and anti-loss screws so to allow an easy replacement or adding of filters. Clear toughened glass 5mm NANOPOINTER, MICROPOINTER and MINIPOINTER, 6mm POINTER, 8mm MEGAPOINTER thick. LOR --

INSTALLATION AND MAINTENANCE

The tempered front glass diffuser is fixed externally to the fitting through silicon resin, perfectly flush with the front ring. Water and dirt deposits that can disturb the lighting performance of the projector can easily flow away.

WIRING

NANOPOINTER, MICROPOINTER: Luminaire supplied with neoprene 5,0m H05RN-F cable and connector. MINIPOINTER, POINTER AND MEGAPOINTER: Luminaire supplied with neoprene 0,5m H05RN-F cable and connector. Isolation: CLASS III . Available colours: Anthracite grey (cod.24). Weight: Kg Glow Wire test: --

LED module included

REGISTERED DESIGN

This luminaire contains built-in LED modules. In case of damage or malfunction please contact the manufacturer to receive additional instructions on how to replace and relative spare parts to order. The LED modules cannot be handled in the luminaire by the end user.


This product contains a light source of energy efficiency class (EPREL - European Product Registry for Energy Labelling): G.

LED modules are engineered accordingly to the existing regulations of Lumen Maintenance (LM80) and Technical Memorandum (TM21), where uniformity and quality of the light is 70,000 hours referred to L80 B10 Ta 25 ° C (50,000 hours referable to L80 B10 Ta 40°C). Lifespan of the luminaire min. 70.000 hours Ta 25°C, min. 50,000 hours at 40°C. Performance Ambient temperature Tq 25°C. Operating ambient temperature range is from -20°C to +50°C. Storage temperature range from -20°C to +60°C.

WARRANTY

All items produced from 01/01/2026 onwards are covered by a 5 (five)-year warranty against manufacturing and conformity defects, in accordance with the terms and limits set out in the manufacturer's official documentation. For full details, exclusions and warranty activation procedures, please refer to the following link: www.simes.it/warranty


NANOPOINTER 1LED MONOCHROME S.2781W.24 (Anthracite grey)




ACCESSORIES




**S.2776
STAKE**
In polypropylene Colour: black (code .09)



**S.2790
MEDIUM BEAM FILTER 30° for NANOPOINTER**
Suitable for NANOPOINTER To install inside the fitting.




**S.2791
LARGE BEAM FILTER 60° for NANOPOINTER**
Suitable for NANOPOINTER To install inside the fitting.



**S.2792
ELLIPTICAL BEAM FILTER 60°x1° for NANOPOINTER**
Suitable for NANOPOINTER To install inside the fitting. The nominal value (60° x 1°) refers to the optical filter. Once installed in the luminaire, the resulting light distribution is approximately 60° x 10°. The final value depends on the interaction between the filter, the LED light source, and the luminaire's optical system.



**S.2797
VISOR**
In aluminium Colour: black (code 09)



**S.2799
HONEYCOMB**
In aluminium Colour: black (code 09)



**S.2400
POWER SUPPLY NOT DIMMABLE 35W 230Vac/24Vdc IP20**
In: 240V Alternate Current
Out: 24V Direct Current.
The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 195 x 43 x 30,2 mm
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



**S.2401
POWER SUPPLY NOT DIMMABLE 60W 230Vac/24Vdc IP20**
In: 240V Alternate Current
Out: 24V Direct Current.
The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 225 x 43 x 29,8 mm
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



**S.2402
POWER SUPPLY NOT DIMMABLE IN BOX 60W 230Vac/24Vdc IP55**
Dimensions: 260 x 240 x 100 mm.
Cable IN: 2 with cable glands PG11
Cable OUT: 5 with cable glands PG11
IP55 CLASS II SELV The Total power of all connected luminaires may not be higher than the power of the driver.
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



**S.2403
POWER SUPPLY NOT DIMMABLE 100W 230Vac/24Vdc IP20**
In: 240V Alternate Current
Out: 24V Direct Current.
The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 295 x 43 x 29,8 mm
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.




**S.2404
POWER SUPPLY NOT DIMMABLE IN BOX 90W 230Vac/24Vdc IP55**
Dimensions: 260 x 240 x 100 mm.
Cable IN: 2 with cable glands PG11
Cable OUT: 5 with cable glands PG11
IP55 CLASS II SELV The Total power of all connected luminaires may not be higher than the power of the driver.
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



**S.2405
POWER SUPPLY NOT DIMMABLE 60W 230Vac/24Vdc IP67**
In: 240V Alternate Current
Out: 24V Direct Current.
The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 150 x 53 x 21 mm
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.




**S.2406
POWER SUPPLY NOT DIMMABLE 90W 230Vac/24Vdc IP67**
In: 240V Alternate Current
Out: 24V Direct Current.
The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 171 x 63 x 37,5 mm
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



**S.2411
POWER SUPPLY 0/1-10V 230V/700mA 17W o 230V/24V 15W IP68**
230V/700mA Maximum power consumption: 17W or 230V/24V
Frequency PWM : 240Hz Maximum power consumption: 15W
Dimensions 121mmx53mmx26mm IP68 SELV CLASS II Warning!!!
Always check the minimum Forward voltage (Vf min) of the fixtures that will be connected to this driver.
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

Next ...

NANOPOINTER 1LED MONOCHROME**S.2781W.24 (Anthracite grey)****ACCESSORIES****S.2415**

POWER SUPPLY DIMMABLE 230Vac/24Vdc 24W 244Hz IP67
Dimmable DALI2 for monochromatic LED 24W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV PWM Frequency : 244Hz Dimensions 185 x 35x 33mm
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2416**

POWER SUPPLY DIMMABLE 230Vac/24Vdc 75W 244Hz IP67
Dimmable DALI 2 for monochromatic LED 75W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV PWM Frequency : 244Hz Dimensions 280 x 40x 28mm
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2419**

POWER SUPPLY DIMMABLE DALI2, PUSH DIM 36W 230Vac/24Vdc 3,6KHz IP20
Dimmable DALI2, PUSH DIM for monochromatic LED 35W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV Dimensions 210mmx43mmx30mm PWM Frequency :

**S.2421**

POWER SUPPLY DIMMABLE DALI, PUSH DIM e DSI 60W 230Vac/24Vdc 1KHz IP20
Dimmable DALI, PUSH DIM, DSI for monochromatic LED 60W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV PWM Frequency : ~1KHz Dimensions 225 x 43x 29,8mm NB: not suitable for Family products NANOLED STAINLESS-STEEL
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2423**

BOX WITH DIMMABLE POWER SUPPLY DALI2, 1-10v e PUSH-DIM 60W 230Vac/24Vdc 2kHz IP55 MAX 5 OUTPUTS
60W 230Vac/24Vdc Dimensions 260mmx240mmx100mm PWM Frequency : 2kHz IP55 SELV CLASS II NB: not suitable for Family products NANOLED STAINLESS-STEEL
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2424**

POWER SUPPLY DIMMABLE 1-10V, PUSH DIM 60W 230Vac/24Vdc 244Hz IP20
Dimmable 1-10V, PUSH DIM for monochromatic LED 60W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV PWM Frequency : 244Hz Dimensions 125 x 82x 29mm
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2425**

BOX WITH DIMMABLE POWER SUPPLY DALI, 1-10v e PUSH-DIM 90W 230Vac/24Vdc 2kHz IP55 MAX 5 OUTPUTS
90W 230Vac/24Vdc Dimensions 260mmx240mmx100mm PWM Frequency : 2kHz IP55 SELV CLASS II NB: not suitable for Family products NANOLED STAINLESS-STEEL
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2426**

POWER SUPPLY DIMMABLE DALI 2 120W 230Vac/24Vdc 2,5KHz IP67
Dimmable DALI 2 for monochromatic LED 120W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV PWM Frequency : 2,5KHz Dimensions 191 x 63x 37,5mm NB: not suitable for Family products NANOLED STAINLESS-STEEL
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2427**

POWER SUPPLY DIMMABLE 1-10V 60W 230Vac/24Vdc 1,47KHz IP67
Dimmable 1-10V for monochromatic LED 60W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV PWM Frequency : 1,47KHz Dimensions 150x53x35mm NB: not suitable for Family products NANOLED STAINLESS-STEEL
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2428**

POWER SUPPLY DIMMABLE 1-10V 90W 230Vac/24Vdc 1,47KHz IP67
Dimmable 1-10V for monochromatic LED 90W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV PWM Frequency : 1,47KHz Dimensions 171 x 63x 37,5mm NB: not suitable for Family products NANOLED STAINLESS-STEEL
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2429**

POWER SUPPLY DIMMABLE DALI2, PUSH DIM 75W 230Vac/24Vdc 3,6KHz IP20
Dimmable DALI2, PUSH DIM for monochromatic LED 75W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV Dimensions 293mmx43mmx30mm PWM Frequency :

**S.2430**

POWER SUPPLY NOT DIMMABLE MULTI-POWER 230V/250mA-700mA 20W oppure 24Vdc 16W IP20
MULTI-POWER SUPPLY 230V/250mA-700mA Maximum power consumption 20W or 16W 230Vac/24Vdc Dimensions 110mmx50mmx20mm IP20 CLASS II SELV Warning!!! Always check the minimum Forward voltage (Vf min) of the fixtures that will be connected to this driver.
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

NANOPOINTER 1LED MONOCHROME

S.2781W.24 (Anthracite grey)

Next...



ACCESSORIES



S.2438
POWER SUPPLY 230V/250mA-700mA 20W o 230Vac/24Vdc 16W 240Hz DALI DIMMABLE IN BOX IP67
 DALI DIMMABLE MULTI-POWER SUPPLY 230V/250mA-700mA
 Maximum power consumption: 20W or 16W 230Vac/24Vdc
 Dimensions 175,5mmx86,5mmx43mm PWM Frequency : 240Hz IP67
 CLASS II SELV NB: not suitable for Family products NANOLED
 STAINLESS STEEL Warning!!! Always check the minimum Forward voltage (Vf min) of the fixtures that will be connected to this driver.
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.




S.2439
POWER SUPPLY 230V/250mA-700mA 20W o 230Vac/24Vdc 16W 240Hz DIMMABLE 1-10V, PUSH DIM IN BOX IP67
 1-10V, PUSH DIM DIMMABLE MULTI-POWER SUPPLY
 230V/250mA-900mA Maximum power consumption: 20W or 16W 230Vac/24Vdc Dimensions 175,5mmx86,5mmx43mm PWM Frequency : 240Hz IP67 CLASS II SELV NB: not suitable for Family products NANOLED STAINLESS STEEL Warning!!! Always check the minimum Forward voltage (Vf min) of the fixtures that will be connected to this driver.
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2441
POWER SUPPLY DIMMABLE DALI, PUSH DIM, 0-10V, 1-10V 230Vac/24Vdc 24W 244Hz IP20
 Dimmable DALI, PUSH DIM, 0-10V, 1-10V for monochromatic LED 24W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. PWM Frequency : 244Hz Dimensions 164mm x38mm x24,5mm IP20 CLASS II SELV
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2442
POWER SUPPLY DIMMABLE DALI2, PUSH DIM, 0-10V, 1-10V 230Vac/24Vdc 75W 244Hz IP20
 Dimmable DALI2, PUSH DIM, 0-10V, 1-10V for monochromatic LED 75W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV PWM Frequency : 244Hz Dimensions 280mmx40mmx29mm
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2445
POWER SUPPLY NOT DIMMABLE 120W 230Vac/24Vdc IP67
 In: 240V Alternate Current
 Out: 24V Direct Current.
 The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 191 x 63 x 37,5 mm
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2446
POWER SUPPLY NOT DIMMABLE 320W 230Vac/24Vdc IP67
 In: 240V Alternate Current
 Out: 24V Direct Current.
 The Total power of all connected luminaires may not be higher than the power of the driver. CLASS I SELV Dimensions: 252 x 90 x 43 mm
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2498) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2447
POWER SUPPLY DALI 200W 230Vac/24Vdc
 Power supply for monochromatic LED 200W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV Dimensions 195x68x39mm
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2449
POWER SUPPLY DIMMABLE DALI2, PUSH DIM 100W 230Vac/24Vdc 3,6KHz IP20
 Dimmable DALI2, PUSH DIM for monochromatic LED 100W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV Dimensions 293mmx43mmx30mm PWM Frequency :



S.1084
FLANGE FOR POLE Ø60mm INSTALLATION
 Die-cast aluminium flange suitable only for Ø 60 mm poles. The flange can be used for maximum 2 projectors, one for each side.