





MOVIT SQUARE 220mm

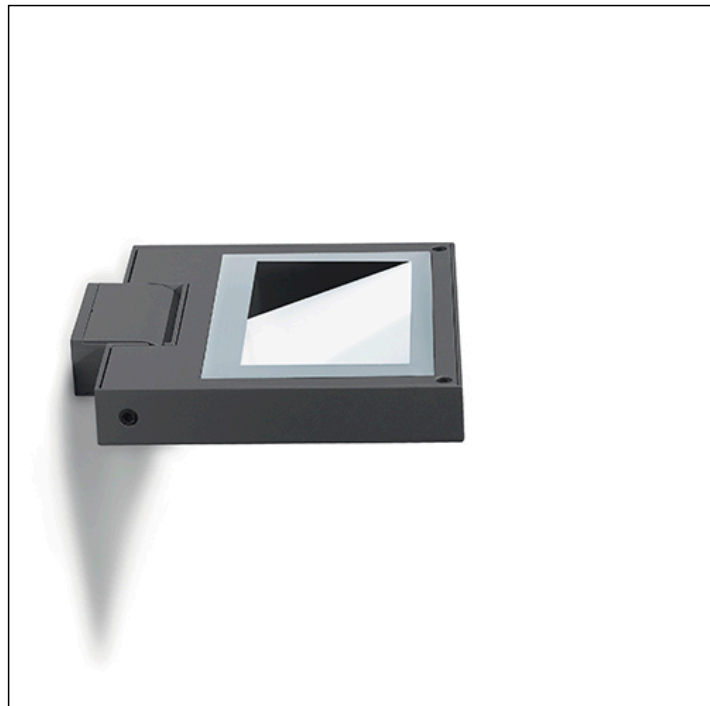

h(m)	E(lx) 3000K			
10	3.0	2.5	2.0	1.0
8	5.0	4.5	3.0	2.0
6	12	10	5.0	2.5
4	25	17	7.0	2.0
2	34	17	4.0	1.0
3 m	0	2	4	6 (m)

*Photometric measured using WHITE LED 3000K

Version available on request without price surcharge.

S.3050N.24 (Anthracite grey)module LED 4000K 220-240Vac **DIMMABLE DALI; DALI2; PUSH**
Spotlights**Light Source Technical Data**

Light source type:	LED
Colour temperature:	4000K
Rated module luminous flux:	3011lm
Rated luminaire luminous flux:	2145lm
Rated module power:	16.1W
Rated luminaire power:	18.6W
Luminaire efficacy:	115lm/W
ULR:	0%
CIE Flux Code:	31 69 95 100 100
Color Rendering Index:	CRI 80
Standard Deviation Color Matching:	MacAdam step 3

Temperature and life time Technical Data

LED Lifetime:	L80 B10 70.000h Ta 25°C L80 B10 50.000h Ta 40°C
Lifespan of the LUMINAIRE:	min. 70.000h Ta 25°C min. 50.000h Ta 40°C
Performance ambient temperature:	Tq 25°C
Operating ambient temperature range:	da -20°C a +50°C
Storage temperature range:	da -20°C a +60°C

WARRANTYAll Simes products are covered by an extended 5-year warranty. For terms and conditions, see www.simes.it/warranty**Power Supply Technical Data**

Voltage (AC):	220-240Vac
Frequency (AC):	50/60Hz
Voltage (DC):	180-280Vdc (No PUSH DIM)
	DALI; DALI2; PUSH
Dimmable:	PUSH Synchronization: - Max 4 Luminaires, distance <15m; - Max 35 Luminaires, distance <300m with S.2490 accessory.
Inrush Current:	7,9A 2,6μsec
Max. quantity of fixtures for Miniature Circuit Breaker type B16A:	63
Max. quantity of fixtures for Miniature Circuit Breaker type C16A:	107
Surge protection (between L-N):	1kV
Surge protection (between L/N-PE):	2kV

Technical Installation Data

Electrical insulation class:	I
Protection class IP:	IP66
Mechanical resistance:	IK09
Weight:	2.7485Kg
Exposed windage area:	0.05m²
Power cable:	5m - 05RN-F

SPECIAL VERSION ON REQUEST: this Luminaires can be supplied with a surcharge in class III (without power supply). Requires working remote power supply in constant current at 425mA V_{fmin}=36.4Vdc V_{fmax}=39.2Vdc. Example SIMES compatible power supplies (check the complete list of the drivers on the catalogue):

Art. S.2437 POWER SUPPLY MULTI-POWER 230V/350mA-1050mA DALI DIMMABLE, 1-10V, PUSH DIM IN BOX IP55 60W MAX 5 OUTPUTS

Art. S.3427 POWER SUPPLY Dali, 1-10V, PUSH MULTI-POWER 230V/350mA-1050mA IP20

NB: Use 1 Power Supply for each Luminaires

S.3050N.24 REV: D

**MOVIT SQUARE 220mm
S.3050N.24 (Anthracite grey)****SPECS SHEET****LUMINAIRE TYPE**

Projector. IP rating IP 66

MATERIAL CHARACTERISTICS

Die-cast EN AB-47100 aluminium housing with high corrosion resistance. Extruded EN AW-6060 aluminium structure (arm version) with high corrosion resistance. Stone wash surface treatment prior to painting process. Steel screws treated with an advanced anticorrosive coating. Silicone Gaskets. **Extra-resistant Painting Process:**

Extra-resistant exterior coating. Product suitable for applications in high-humidity environments, C5 ZONE (according to UNI EN ISO 9223:2012).

Mechanical resistance IK 09

LIGHTING PERFORMANCE

Reflector in 99.98% pure anodized aluminium HI-GRADE . Clear toughened glass. LOR --

INSTALLATION AND MAINTENANCE

The tempered front glass diffuser is fixed externally to the fitting through silicon resin, perfectly flush with the front ring. Water and dirt deposits that can disturb the lighting performance of the projector can easily flow away. The pre-wired connecting wall plaquette and its fast connector make the installation and maintenance process quick, easy and safe.

WIRING

Supplied with a 5m pre-wired 05RN-F cable and fast connector (only for MOVIT SQUARE 320mm) . Isolation: CLASS I . Available colours: White (cod.01), Aluminium grey (cod.14), Anthracite grey (cod.24). Weight: 2.7485 Kg Glow Wire test: --

LED module included

MOVIT REGISTERED DESIGN

This luminaire contains built-in LED modules. In case of damage or malfunction please contact the manufacturer to receive additional instructions on how to replace and relative spare parts to order. The LED modules cannot be handled in the luminaire by the end user.

This product contains a light source of energy efficiency class (EPREL - European Product Registry for Energy Labelling): C.

LED modules are engineered accordingly to the existing regulations of Lumen Maintenance (LM80) and Technical Memorandum (TM21), where uniformity and quality of the light is 70,000 hours referred to L80 B10 Ta 25 ° C (50,000 hours referable to L80 B10 Ta 40°C). Lifespan of the luminaire min. 70.000 hours Ta 25°C, min. 50,000 hours at 40°C. Performance Ambient temperature Tq 25°C. Operating ambient temperature range is from -20°C to +50°C. Storage temperature range from -20°C to +60°C.

ELECTRONIC EQUIPMENT SENSITIVE TO OVERVOLTAGE.

We recommend installing surge protection devices "SPD" in the electrical system. Protection devices prevent the intensity of these phenomena's, protecting the appliances from the risk of being damaged and extending the lifespan. Outdoor luminaires are subject to all types of permanent, temporary, or transient electrical disturbances. Such disturbances can create permanent damage or failure affecting its performance and durability. The surge protection device (supplied by SIMES) is utilized to limit the destructive effect of these phenomena. We suggest that each luminaire must be connected to one protection device at not more than 10m away. For correct coordination of the protections, a surge protection device must also be provided inside the electrical panel of the system (the selection of this device must be carried out from the electrical designer and is not supplied by SIMES).

WARRANTY

All items produced from 01/01/2026 onwards are covered by a 5 (five)-year warranty against manufacturing and conformity defects, in accordance with the terms and limits set out in the manufacturer's official documentation. For full details, exclusions and warranty activation procedures, please refer to the following link: www.simes.it/warranty

MOVIT SQUARE 220mm S.3050N.24 (Anthracite grey)



ACCESSORIES



S.2498
SURGE PROTECTION DEVICE 10kV CLASS I
Compatible with all lighting fixtures classified under electrical Protection Class I Rated voltage 230-277V SPD type 2+3 Max Surge Protection 10kV IP67
EACH FIXTURE MUST BE CONNECTED TO ONE SINGLE SURGE PROTECTION DEVICE AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2809
POLE BASE COVER
For pole with base and pole to be buried Ø102mm or Ø120mm. Die-cast aluminium housing.
ON REQUEST special version of POLE BASE COVER for cylindrical poles Ø 60mm or Ø 76mm




S.3046
ACCESSORY SINGLE MOUNT POLE Ø60mm
Product is suitable for installation on SIMES poles Ø60mm



S.3047
ACCESSORY DOUBLE MOUNT POLE Ø60mm
Product is suitable for installation on SIMES poles Ø60mm



S.2849
PLANTED ROOT for CYLINDRICAL POLE S.2801, S.2813, S.2843, S.2845
C= 200mm, D=200mm E=Ø80mm, h=460mm, h1=90mm and bolts in galvanized steel with M16 threads. Suggested reinforced concrete footstall dimension **: A = 0.7 m B = 0.7 m
**Footstall dimension can be calculated according to your country norms and ground properties.
WE RECOMMEND THE USE OF THE FOLLOWING ACCESSORIES :
S.2801, S.2813, S.2843, S.2845 CYLINDRICAL POLE




S.2800
H 2,5m Ø60mm CYLINDRICAL POLE TO BE BURIED
Cylindrical shaped poles consisting of: straight circular section shaft, Ø 60mm, 3mm in thickness, total length 3,00m, single section built by using longitudinally welded tubes by induction welding (ERW) UNI EN 10219-2-ISO 4200

Suitable for ground recessed installation to a cement base 0,50m:
Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 0,7m.
Footstall dimension can be calculated according to your country norms and ground properties.

The grade of steel used is S235JR (Fe360B) with material characteristics as per normative UNI EN 10025;

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content.
POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions.
Resistance test protection for Marine applications for 1500h.



S.2801
H 2,5m Ø60mm CYLINDRICAL POLE WITH BASE
Cylindrical shaped poles consisting of: straight circular section shaft, Ø 60mm, 3mm in thickness, total length 2,50m , single section built by using longitudinally welded tubes by induction welding (ERW) UNI EN 10219-2-ISO 4200


Suitable for installation to a planted root flange through a base plate 250mm x250mm x12mm in steel S355JO : Suggested reinforced concrete footstall dimension 1m x 1m h 0,7m. Footstall dimension can be calculated according to your country norms and ground properties.

The grade of steel used is S235JR (Fe360B) with material characteristics as per normative UNI EN 10025;

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content.
POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions.
Resistance test protection for Marine applications for 1500h.

WE RECOMMEND THE USE OF THE FOLLOWING ACCESSORIES :
S.2849 PLANTED ROOT for CYLINDRICAL POLE



S.2812
H 3,0m Ø76mm CYLINDRICAL POLE TO BE BURIED
Cylindrical shaped poles consisting of: straight circular section shaft, Ø 76mm, 3mm in thickness, total length 3,50m, single section built by using longitudinally welded tubes by induction welding (ERW) UNI EN 10219-2-ISO 4200

Suitable for ground recessed installation to a cement base 0,50m:
Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 0,7m.
Footstall dimension can be calculated according to your country norms and ground properties.

The grade of steel used is S235JR (Fe360B) with material characteristics as per normative UNI EN 10025;

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content.
POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions.
Resistance test protection for Marine applications for 1500h.


Including inspection door, terminal cable block and fuse.

Next ...

MOVIT SQUARE 220mm S.3050N.24 (Anthracite grey)



ACCESSORIES



S.2813
H 3,0m Ø76mm CYLINDRICAL POLE WITH BASE

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 76mm, 3mm in thickness, total length 3,00m , single section built by using longitudinally welded tubes by induction welding (ERW) UNI EN 10219-2-ISO 4200

Suitable for installation to a planted root flange through a base plate 250mm x250mm x12mm in steel S355JO : Suggested reinforced concrete footstall dimension 1m x 1m h 0,7m. Footstall dimension can be calculated according to your country norms and ground properties.


The grade of steel used is S235JR (Fe360B) with material characteristics as per normative UNI EN 10025;

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1500h.

Including inspection door, terminal cable block and fuse.

WE RECOMMEND THE USE OF THE FOLLOWING ACCESSORIES :
S.2849 PLANTED ROOT for CYLINDRICAL POLE



S.2843
H 3,5m Ø60mm CYLINDRICAL POLE WITH BASE

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 60mm, 4mm in thickness, total length 3,50m , single section built by using longitudinally welded tubes by induction welding (ERW) UNI EN 10219-2-ISO 4200


Suitable for installation to a planted root flange through a base plate in steel S355JO Footstall dimension can be calculated according to your country norms and ground properties.

The grade of steel used is S235JR (Fe360B) with material characteristics as per normative UNI EN 10025;

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1500h.

WE RECOMMEND THE USE OF THE FOLLOWING ACCESSORIES :
S.2849 PLANTED ROOT for CYLINDRICAL POLE



S.2842
H 3,5m Ø60mm CYLINDRICAL POLE TO BE BURIED

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 60mm, 4mm in thickness, total length 4,00m , single section built by using longitudinally welded tubes by induction welding (ERW) UNI EN 10219-2-ISO 4200

Suitable for ground recessed installation to a cement base 0,50m : Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 0,7m. Footstall dimension can be calculated according to your country norms and ground properties.

The grade of steel used is S235JR (Fe360B) with material characteristics as per normative UNI EN 10025;

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1500h.



S.3049
STAKE
In polypropylene Colour: black (code .09)



S.2490
Signal converter Input PUSH DIM Output DALI 2
Features DALI-2 dimming (1-100%). Control unit for the conversion from push button to DALI-2 interface. Allowed powering up to 35 DALI-2 interface in BROADCAST. Input current typ. 70 Ma - max. 110 Ma. Application in installation boxes. Light regulation 1-100% by means of PUSH: - a short push to turn on and off; - a longer push to increase or decrease light intensity. Dimensions 43mm x 46mm x 18.5mm
Compatible with the DT6 protocol and only for monochromatic LEDs



S.2492
IP20 Interface Virtual Midnight/Bilevel (Step-Dimming)
This device is designed to maximize energy savings in various lighting applications. The devices can operate in two modes and are compatible exclusively with Simes DALI lighting fixtures: 1. Virtual Midnight: This system is designed for public outdoor lighting, enabling the automatic reduction of light output during periods when full-power operation is unnecessary. Configuring the system is straightforward, as programming is done via rotary selectors built into the device. 2. Bilevel (Step-Dimming): The two-level dimming system is commonly used in urban and street lighting, as well as in industrial facilities, emergency stairwells, parking lots, and other similar applications. The Bilevel function allows for adjusting the light intensity between two levels, using controls such as a relay, a twilight switch paired with a timer, or a motion sensor. The lighting level can be increased or decreased through simple programming using the rotary selectors built into the device. Dimensions 60mm x33mm x15mm
It can manage a maximum of 7 DALI luminaires/devices. Possibility to extend up to max. 64 luminaires through the DALI Expander (S.2494).

MOVIT SQUARE 220mm**S.3050N.24 (Anthracite grey)**

Next

**ACCESSORIES****S.2493****IP67 Interface Virtual Midnight/Bilevel (Step-Dimming)**

This device is designed to maximize energy savings in various lighting applications. The devices can operate in two modes and are compatible exclusively with Simes DALI lighting fixtures: 1. Virtual Midnight: This system is designed for public outdoor lighting, enabling the automatic reduction of light output during periods when full-power operation is unnecessary. Configuring the system is straightforward, as programming is done via rotary selectors built into the device. 2. Bilevel (Step-Dimming): The two-level dimming system is commonly used in urban and street lighting, as well as in industrial facilities, emergency stairwells, parking lots, and other similar applications. The Bilevel function allows for adjusting the light intensity between two levels, using controls such as a relay, a twilight switch paired with a timer, or a motion sensor. The lighting level can be increased or decreased through simple programming using the rotary selectors built into the device. Dimensions 175.5mm x86.5mm x43mm

It can manage a maximum of 7 DALI luminaires/devices. Possibility to extend up to max. 64 luminaires through the DALI Expander (S.2494).

**S.2494****DALI EXPANDER**

The IP20 DINrail device is used to extend a DALI circuit via broadcast. The received input signal is amplified and transmitted in broadcast to the DALI luminaires / DALI control gears. The DALI Expander has an integrated DALI bus power supply (200mA) which can control up to a maximum of 64 DALI devices within 300 meters.