



PART OF
CLAN TABLE / FLOOR

SELECTED COLOUR
 **06 Yellow** **STANDARD**

DESCRIPTION
CLAN table lamp Ø400
GL - general lighting /
11 W system
943 lm system
85.7 lm/W
3000 K
On/off

DESIGNED BY
Harveiluce

Specification sheet generated on 25/08/2026


TECHNICAL DATA

LAST UPDATE: 07/08/2026

DESCRIPTION

Diffused light table lamp with heat-formed PMMA diffuser screen. PVC base and chromed steel upper ring. E14 lamp holder with 40W 2700K LED lamp included. Power supply cable with plug L = 2000 with ON-OFF section breaker switch. Adjustable PMMA diffuser screen with the PVC base.

DIMENSIONS

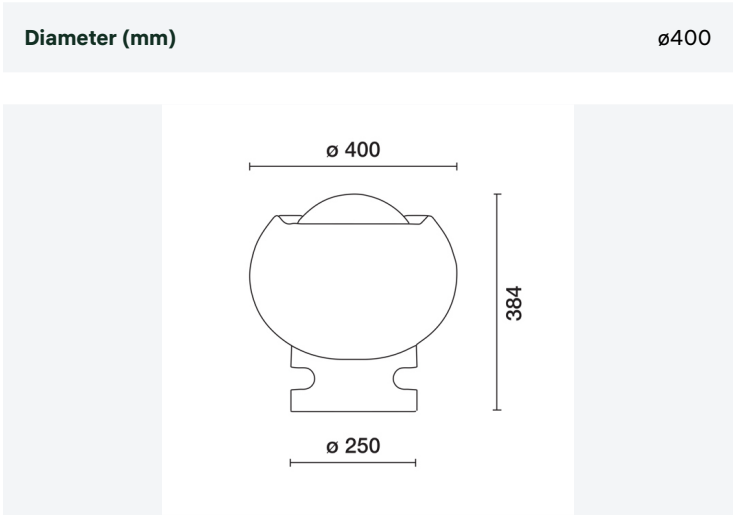

TECHNICAL PERFORMANCE

	Class II
	Protected against penetration of solids larger than 12 mm, not protected against penetration of liquids.

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)	1.92
Material	Thermoplastic

PRODUCT CERTIFICATION


 CE	 EAC	 RETILAP	 TISI - THAI INDUSTRIAL STANDARD INSTITUTE
 UK CONFORMITY ASSESSED	 ENEC PENDING		

PHOTOMETRIC DATA


DETAILS

Optic and beam angle	GL - general lighting /
Im system	943
W system	11
Im source	1521
W source	11
Luminous efficiency - Im/W (system value)	85.7
Im in emergency mode	-
Maximum intensity (cd)	181
Total light flux at or above an angle of 90° (Lm)	707
Light output ratio (LOR)	68
Optic and beam angle	GL - general lighting
Adjustability	rotation and tilt updown
Colour temperature	3000 K

CHARTS AND POLAR CURVES

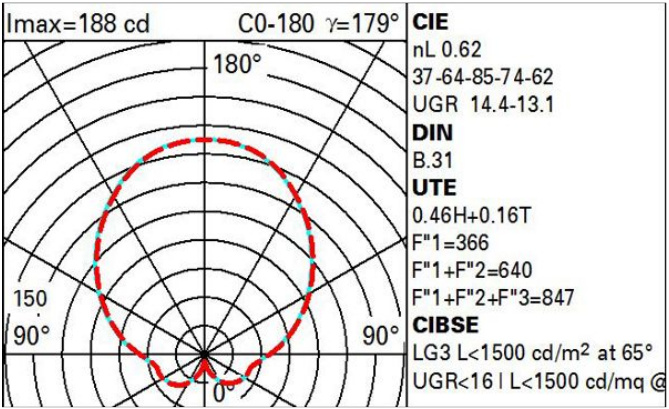

R	77	75	73	71	55	53	33	00	DRR
K0.8	35	28	23	20	25	21	20	14	31
1.0	38	32	27	23	29	25	23	17	37
1.5	44	39	34	31	35	31	29	22	49
2.0	48	43	39	36	39	36	33	26	57
2.5	50	46	42	39	42	39	36	29	63
3.0	52	48	45	42	44	41	38	31	67
4.0	54	51	48	45	46	44	40	33	73
5.0	55	52	50	48	48	46	42	35	77

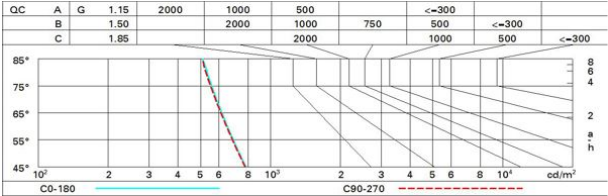

Corrected UGR values (at 1521 lm bare lamp luminous flux)											
Riflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	9.0	10.0	9.7	10.7	11.5	9.0	9.9	9.6	10.6	11.5
	3H	10.9	11.8	11.6	12.5	13.4	9.4	10.3	10.1	11.0	11.9
	4H	11.9	12.7	12.6	13.4	14.3	9.6	10.4	10.3	11.1	12.0
	6H	12.8	13.6	13.5	14.3	15.2	9.7	10.4	10.4	11.2	12.1
	8H	13.2	14.0	14.0	14.7	15.6	9.7	10.4	10.4	11.2	12.1
	12H	13.7	14.4	14.4	15.1	16.0	9.7	10.4	10.4	11.1	12.0
4H	2H	9.6	10.5	10.3	11.2	12.1	11.8	12.6	12.5	13.4	14.2
	3H	11.7	12.4	12.5	13.2	14.1	12.4	13.1	13.2	13.9	14.8
	4H	12.8	13.4	13.5	14.2	15.1	12.7	13.4	13.5	14.1	15.1
	6H	13.9	14.4	14.6	15.2	16.2	13.0	13.6	13.8	14.3	15.3
	8H	14.4	14.9	15.2	15.7	16.7	13.1	13.6	13.9	14.4	15.4
	12H	14.9	15.4	15.7	16.2	17.2	13.1	13.6	13.9	14.4	15.4
8H	4H	13.1	13.7	13.9	14.5	15.4	14.3	14.9	15.1	15.7	16.6
	6H	14.4	14.9	15.2	15.7	16.7	14.8	15.2	15.6	16.1	17.1
	8H	15.0	15.4	15.9	16.3	17.3	15.0	15.4	15.8	16.2	17.2
	12H	15.7	16.1	16.6	16.9	18.0	15.2	15.5	16.0	16.4	17.4
12H	4H	13.2	13.7	14.0	14.5	15.5	14.8	15.3	15.6	16.1	17.1
	6H	14.5	14.9	15.3	15.7	16.8	15.4	15.8	16.2	16.6	17.6
	8H	15.2	15.6	16.1	16.4	17.5	15.7	16.0	16.5	16.9	17.9
Variations with the observer position at spacing:											
S =		1.0H	0.1 / -0.1		0.1 / -0.1						
		1.5H	0.2 / -0.2		0.2 / -0.2						
		2.0H	0.2 / -0.3		0.2 / -0.3						

ELECTRICAL DATA

ZVEI code	LED
Control	On/off

INSTALLATION

DESCRIPTION

Table lamp

Mounting	Table top
Wiring	Cable with switch and plug.