

| Project name | Location | Type | Revision number | Date |
|--------------|----------|------|-----------------|------|
|              |          |      |                 |      |



Outdoor | Bollards | SLIMSOFT  
SLIMSOFT 1 (SLI-10003)

## SLIMSOFT 1 - SLI-10003 - 5 LED - 7 W - 180° - 2700K CRI80 - ON/OFF - CONCRETE - URBAN

SLI-10003-G-8027-ND-SU01



### Product description

Ø102 - 600 mm - With 180° light distribution




### Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear acrylic PMMA diffuser
- High-efficiency PMMA lens
- Integral control gear

### Optic



### Product colour



- SU01  
Concrete - Urban

We reserve the right to make technical and design changes.

07:55, 25-08-2026

<https://www.ligman.com/sli-10003-g-8027-nd-su01/>

**THAILAND**  
LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Priao,  
24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)



# SLIMSOFT 1 - SLI-10003 - 5 LED - 7 W - 180° - 2700K CRI80 - ON/OFF - CONCRETE - URBAN

SLI-10003-G-8027-ND-SU01


## Technical information

|               |                          |
|---------------|--------------------------|
| Variant code  | SLI-10003-G-8027-ND-SU01 |
| Material      | Aluminium                |
| Light source  | 5 LED                    |
| Power         | 7 W                      |
| Lumen         | 165 lm                   |
| Efficacy      | 24 lm/W                  |
| Driver option | Integral control gear    |
| Driver        | Constant current (CC)    |
| Input voltage | 220-240V 50/60Hz         |
| Optic         | G                        |
| Optic value   | 180°                     |


|                         |                  |
|-------------------------|------------------|
| CCT / CRI               | 2700K CRI80      |
| BUG                     | B0-U1-G0         |
| ULR                     | 4%               |
| ULOR                    | 4%               |
| CIE flux code n°3       | 92               |
| Dimming type            | On/Off           |
| Product colours         | Concrete - Urban |
| Weight                  | 2.9 kg           |
| Operating temperature   | -20 °C to 50 °C  |
| MacAdam Ellipse         | 3 SDCM           |
| Lifetime L90B10 (hours) | > 100,000        |

|                                                                             |                |
|-----------------------------------------------------------------------------|----------------|
| Lifetime L80B10 (hours)                                                     | > 100,000      |
| Lifetime L80B50 (hours)                                                     | > 100,000      |
| Inrush current                                                              | 9 A / 140 µs   |
| Maximum number of luminaires of this variant per miniature circuit breaker: |                |
| B 10A                                                                       | 62 luminaires  |
| B 16A                                                                       | 98 luminaires  |
| B 20A                                                                       | 0 luminaires   |
| C 10A                                                                       | 77 luminaires  |
| C 16A                                                                       | 123 luminaires |
| C 20A                                                                       | 0 luminaires   |


SLI-10003



## Isolux Diagram

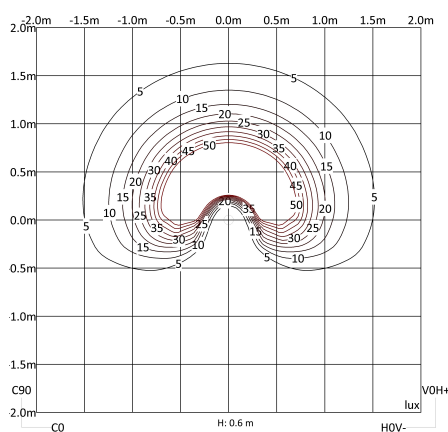

## Polar diagram

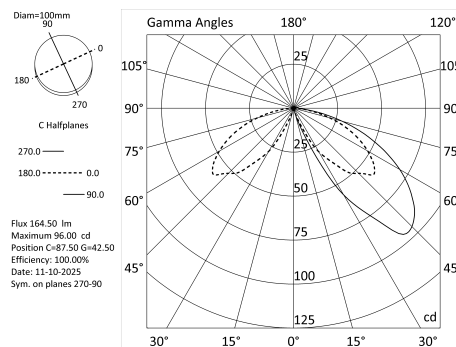

**SLIMSOFT 1 - SLI-10003 - 5 LED - 7 W - 180° - 2700K CRI80 - ON/OFF - CONCRETE - URBAN**

SLI-10003-G-8027-ND-SU01

**Accessory**



Anchor bolt  
**A10791**



DALI Control System  
**Control-DALI**



Root mount kit  
**A15091**