



PART OF

PLATEA PRO FLOODLIGHT 296X214MM
MULTIPLATEA POLE MOUNTED
MULTIPLATEA WALL MOUNTED

SELECTED COLOUR

☒ 15 Grey

☐ STANDARD

DESCRIPTION

Platea Pro

F - Flood 29°

32 W system

3342 lm system

104.4 lm/W

3000 K

CRI 83 - Rf (Colour Fidelity Index) 85 - Rg (Gamut Index) 98

DALI-2

DESIGNED BY

Jean-Michel Wilmotte

Specification sheet generated on 25/08/2026

TECHNICAL DATA

LAST UPDATE: 07/08/2026

DESCRIPTION

Outdoor luminaire with a Flood optic, designed to use LED lamps. Made up of an optical assembly with a base and an aluminium alloy frame. The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. With a 5 mm thick colourless transparent tempered sodium-calcium glass cover. The product can be tilted by +5°/-90° around the vertical plane with a 10° step graduated gauge and fitted with mechanical blocks that guarantee stable aiming of the beam of light. Horizontal aiming is performed using the slots in the base, which allow an ±30° adjustment.

High visual comfort. Polymer optic lenses offering high yield and even light distribution. Complete with circuit fitted with Warm White monochrome power LEDs. Extractable control gear connected with quick-coupling connectors. 220-240V ac 50/60Hz DALI electronic ballast. Replaceable control gear. All the screws used are made of A2 stainless steel.

TECHNICAL PERFORMANCE



Class II

IP66

Completely protected against penetration of dust, Protected against waves

IK08

IK08 - Protected against 5 J shocks

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)

5.45

Material

Die-cast aluminium

PRODUCT CERTIFICATION



ENEC-03




TISI - THAI
INDUSTRIAL
STANDARD
INSTITUTE



BIS PENDING

DIMENSIONS

General (mm)	296x214
--------------	---------






PHOTOMETRIC DATA

DETAILS

Optic and beam angle	F - Flood 29°
lm system	3342
W system	32
lm source	4340
W source	32
Luminous efficiency - lm/W (system value)	104.4
lm in emergency mode	-
Maximum intensity (cd)	11761
Total light flux at or above an angle of 90° (Lm)	0
Light output ratio (LOR)	77
Optic and beam angle	F - Flood 29°
Adjustability	directional
Light colour quality	CRI 83 - Rf (Colour Fidelity Index) 85 - Rg (Gamut Index) 98
Colour temperature	3000 K
MacAdam Step	3
Lifetime LED 1	>100,000h - L85 - B10 (Ta 25°C)
Lifetime LED 2	>100,000h - L85 - B10 (Ta 40°C)

CHARTS AND POLAR CURVES

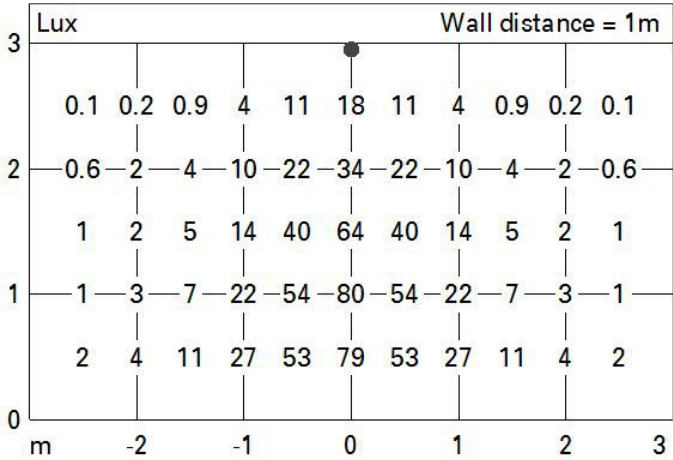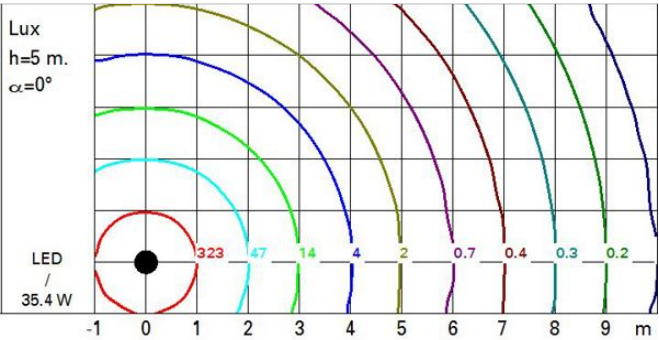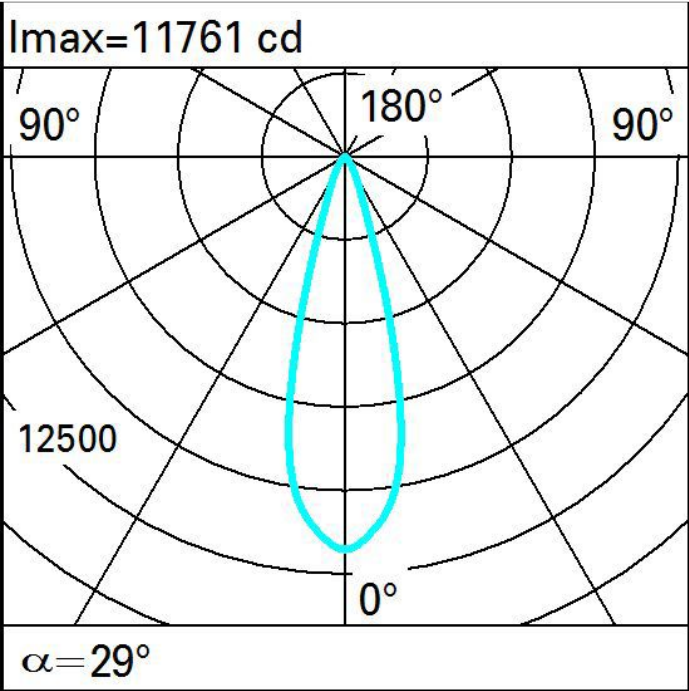

ELECTRICAL DATA

Operating ambient temperature range	from -20°C to +35°C. (*)
Power factor	See installation instructions
Maximum number of luminaires of this type per miniature circuit breaker	B10A: 18 luminaires B16A: 30 luminaires C10A: 31 luminaires C16A: 51 luminaires
Overvoltage protection	10kV Common mode & 6kV Differential mode
Inrush current	31 A / 186 µs
Minimum dimming	10
Voltage	220 - 240
ZVEI code	LED
Power Supply	Electronic Control gear included
Mounting options	Integral
Dimmable option	Dimmable
Control	DALI-2

INSTALLATION

DESCRIPTION

The luminaire can be installed at ground level or on walls using the standard base.

NOTES

Available accessories include: a refractor for elliptical light flow distribution, diffusing glass, visor, directional flaps, protective grille .

Mounting	Surface mounted, Wall surface, Ground anchored
Wiring	Luminaire ready for pass-through wiring. Product perfect watertightness at the power cable entry point is guaranteed by 2 nickel-plated brass M24x1.5 cable clamps, suitable for cables with a max external 14mm ø (1.5mm ² cross section). Push in terminal board.