



PART OF
IWAY VELVET - SMOOTH COLLAR

SELECTED COLOUR

☒ F5 Rust brown

☐ STANDARD

DESCRIPTION

Ø180mm - smooth collar – Neutral White – DALI-2
– 180° Optic

E 180° - Asymmetric 180° emission

9.7 W system

557 lm system

57.4 lm/W

4000 K

CRI 82 - Rf (Colour Fidelity Index) 80 - Rg (Gamut Index) 101

DALI-2

DESIGNED BY

Jean-Michel Wilmotte

Specification sheet generated on 25/08/2026

REQUIRED ACCESSORIES

SELECTED



XC34

MOUNTING ACCESSORIES

Bollard for iWay Velvet Ø90mm - h=804mm

WEIGHT (KG) 2.98

☒ 01 White

OPTIONAL COMPONENTS

SELECTED



B514

MOUNTING ACCESSORIES

Counter-plate with anchor bolts

WEIGHT (KG) 0.21

☒ 00 Indetermina...

TECHNICAL DATA


LAST UPDATE: 21/08/2026

DESCRIPTION

Outdoor bollard installable on ground and floor, designed for the use of LED sources with 180° asymmetric optics. The complete product consists of an optical compartment with attachment and a cylindrical bollard to be ordered separately. The optical compartment is composed of: painted aluminum top cover, PMMA flux recuperator, plexiglass emitting lens, smooth aluminum collar, silicone gasket for watertight seal and power supply. The aluminum parts undergo a multi-step pre-treatment, where the main phases are degreasing, fluorozirconating (surface protective layer) and sealing (silane nano-structured layer). The subsequent painting phase is carried out with primer and liquid acrylic paint, baked at 150°C, which provides high resistance to atmospheric agents and UV rays. The compartment is supplied with an outgoing cable L=100mm to be connected to the power supply via a connector. The optical system is complete with a circuit with Neutral White monochromatic LEDs. All external screws used are made of stainless steel.

DIMENSIONS

Diameter (mm)	ø180
---------------	------

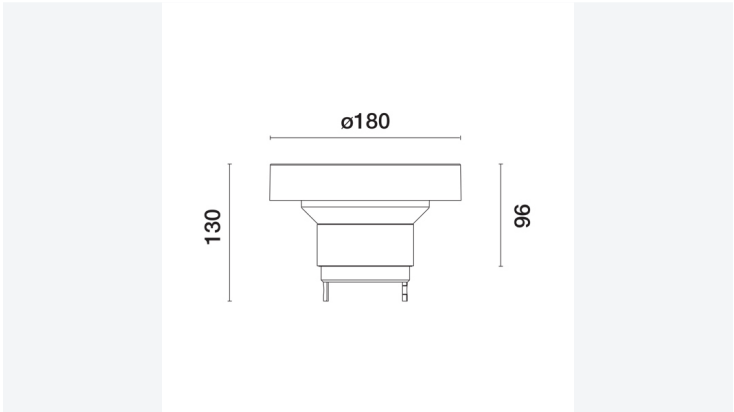

TECHNICAL PERFORMANCE

	Class II
	Completely protected against penetration of dust, Protected against waves
	IK10 - Protected against 20 J shocks

Complies with EN60598-1 and pertinent regulations

PHYSICAL PROPERTIES

Weight (kg)	1.86
Material	Aluminium

PRODUCT CERTIFICATION





PHOTOMETRIC DATA

DETAILS

Optic and beam angle	E 180° - Asymmetric 180° emission
Im system	557
W system	9.7
Im source	1990
W source	9.7
Luminous efficiency - Im/W (system value)	57.4
Im in emergency mode	-
Maximum intensity (cd)	303
Total light flux at or above an angle of 90° (Lm)	2
Light output ratio (LOR)	28
Optic and beam angle	E 180° - Asymmetric 180° emission
Adjustability	fixed
Light colour quality	CRI 82 - Rf (Colour Fidelity Index) 80 - Rg (Gamut Index) 101
Colour temperature	4000 K
MacAdam Step	3
Lifetime LED 1	>100,000h - L80 - B10 (Ta 25°C)
Lifetime LED 2	>100,000h - L80 - B10 (Ta 40°C)

CHARTS AND POLAR CURVES

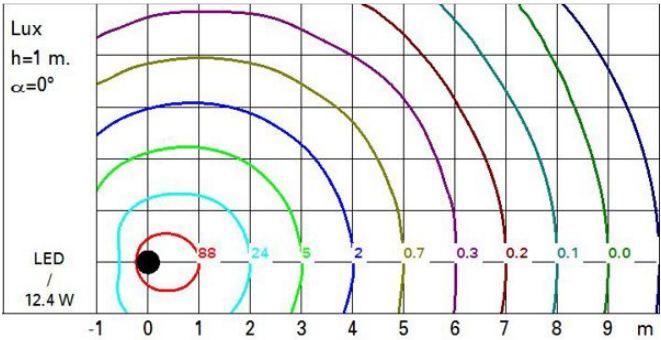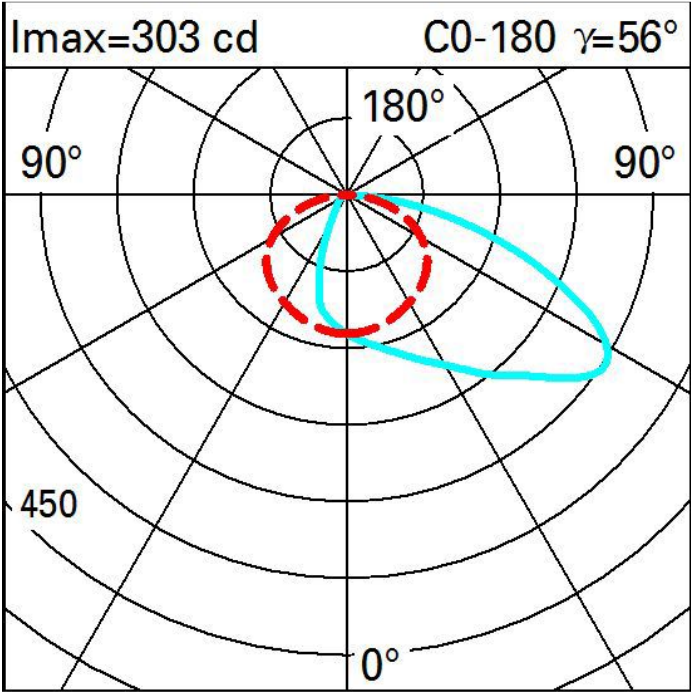

ELECTRICAL DATA

Operating ambient temperature range	from -30°C to 50°C.
Power factor	See installation instructions
Maximum number of luminaires of this type per miniature circuit breaker	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
Overvoltage protection	10kV Common mode & 6kV Differential mode
Inrush current	5 A / 50 µs
Minimum dimming	2
ZVEI code	LED
Power Supply	Electronic Power supply included
Mounting options	Integral
Control	DALI-2

INSTALLATION

DESCRIPTION

Pole to be purchased separately. The product can be installed either by expansion anchors with screws or by counterplate with tie rods.

Mounting	Free standing
Wiring	Connectors to be purchased separately