

UpDown

Pendant or wall mounted systems offering independent direct and indirect outputs


Product Code: UPD-025-SUW-RGBW3090-1300-O-RGBW3090-1300-O-ANO

Highly configurable linear systems with independent indirect (up) and direct (down) outputs, UpDown systems are well regarded for their capacity to illuminate large spaces comfortably and with uniformity. UpDown linear systems are available in 25mm, 50mm and 75mm core body widths, can be either suspended or wall mounted and combined with any of Digilin's constant voltage LED options. Each output can be separately controlled, creating an extraordinary breadth of options.

All Digilin linear systems are manufactured in Australia to custom project lengths and supplied with factory-fitted connectors using Digilin's chemical anchoring process for super durability and ease of installation.



LED Colour	RGBW				
CCT/Wavelength	Red (625nm)	Green (530nm)	Blue (470nm)	White (3000K)	Combined
LED Lumens	132lm/m	359lm/m	57lm/m	817lm/m	1365lm/m
Power	3.6W/m	3.6W/m	3.6W/m	6.9W/m	17.7W/m
Input Current	150mA/m	150mA/m	150mA/m	290mA/m	740mA/m
Input Voltage	24VDC				
Typical CRI	90+				
LED Configuration	Single RGBW 1300lm LED				
LED Module Increment	100mm				
LED Spacing	16.7mm				
Maximum Continuous Run	6.5m (Single Feed), 13mm (Dual Feed)				
Configuration	Direct/Indirect Outputs (electrical specifications above are for each individual output)				
Body Width	25mm				
Mounting	Suspended (Wire)				
Beam Option	Opal Diffuser				
Finish Colour	Natural Anodised Aluminium				
Control	Mains/Phase, DALI, Smooth DALI, DMX, Bluetooth, None				
Driver Placement	Remote, Integral				
Build Material	Extruded Aluminium				
Luminaire IP Rating	IP20				
Dimensions - 25mm version	25mm (width), 35mm (height)				
Dimensions - 50mm version	50mm (width), 120mm (height)				
Dimensions - 75mm version	75mm (width), 120mm (height)				
Dimensions - 100mm version	100mm (width), 120mm (height)				

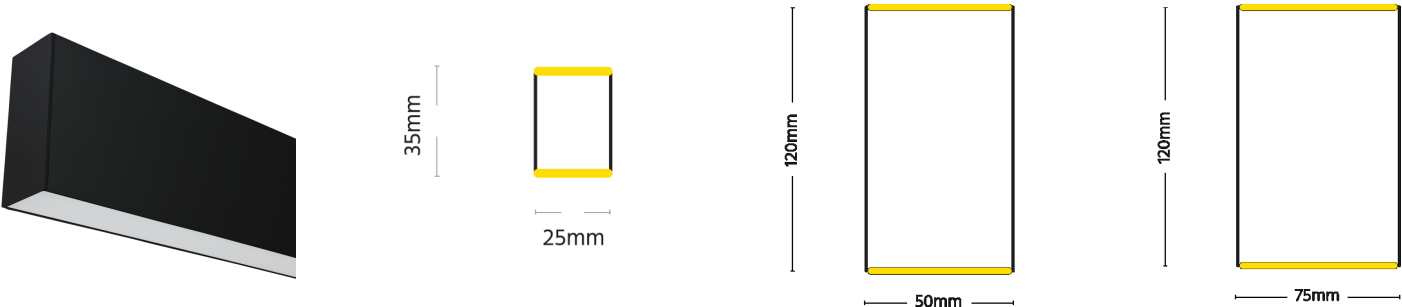

Specifications are subject to change without notice