







30974.000 White (RAL9002)
LED module: 9.3W 1213lm 4000K
neutral white
On-board Dim
Version 4
Wide beam

Product description

Luminaire: aluminium profile, powder-coated. 180° rotation.
Desk fixing: installation bush, brass, powder-coated, for desk thicknesses of 10-40mm. Screw fixing.
Connecting cable L 2.8m with power supply unit and Euro plug.
Control gear.
Push-button, polymer, black, with integrated dimmer for brightness control.
LED module: high-power LEDs.
Reflector: polymer, aluminium vaporised, silver, mirror-finish. Softec lens.
Anti-glare cover: polymer, black.
Safety class II
Weight 1.10kg
Version with other connector types available on request.

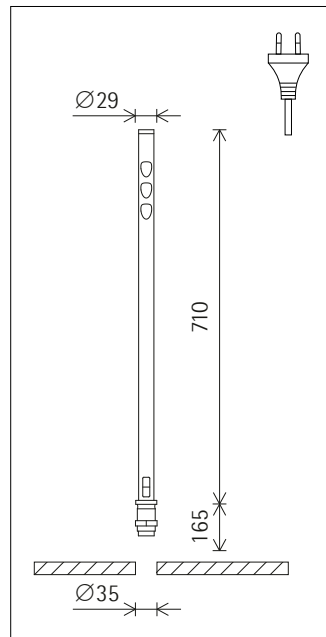

CE 15 IP 20



Technical data

Luminous flux of the luminaire	287lm
Connected load	12.0W
Luminaire efficacy	24lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	1%-100%
Dimming method	CCR_PWM
TLA (Temporal Light Artefacts)	SVM ≤ 0.4; PstLM ≤ 1
LMF	E
Standby power per control gear	--
Luminaires per circuit breaker B16	61

For your regional contact in the ERCO
Sales network click here
www.erco.com/contact

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical
and design changes.
Edition: 28.04.2026
Current version under
www.erco.com/30974.000

Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
30974.000 (direct)	4000K CRI 92	0.71	0.65

MR	Melanopic factor (of luminous radiation) $a_{\text{mel},v}$
MDER	Melanopic Daylight Efficacy Ratio $[\gamma]_{\text{mel},v,D65}$

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDl. (MEDl = Melanopic Equivalent Daylight Illuminance $[lx] E_{v,\text{mel},D65} [lx]$).

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMFxRSMF $\times$ LLMF $\times$ LSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class D
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1708791
Model identifier: 3000068396
Download data sheets for control gear and disassembly instructions at www.erco.com/slr

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industry-standard tolerances.
Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols